

CATALOG LISTING
V7-1S17D8-207

M

ISSUE
5

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-18499

CHECK

CHECK

90

22

AUG

90

W

J

C

CHECK

90


14

AUG

90

REVISIONS

A	CO-76416	J A L	30 NOV 93
B	CO-77116	DCS	31 MAR 94
C	CO82776	J A F	5 APR 96
D	CO-93311	TSM	22 OCT 98

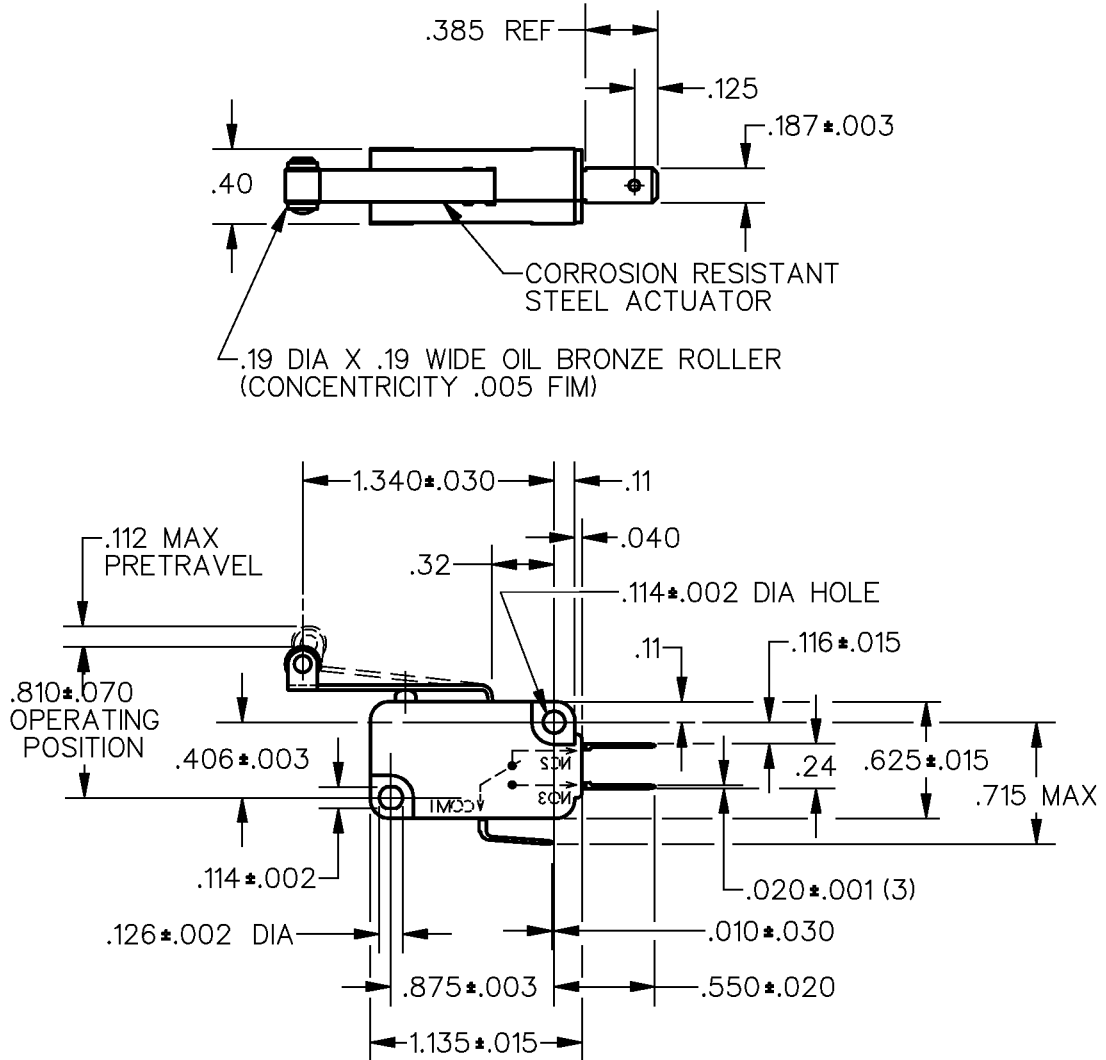


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE— — 85 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE — — — 9 GRAMS MIN	0.1A 125 VAC L142 	ONE PLACE	(.0)	±.030
DIFFERENTIAL TRAVEL — — .030 MAX		TWO PLACE	(.00)	±.015
OVERTRAVEL — — — — .080 MIN		THREE PLACE	(.000)	±.005
RELEASE TRAVEL — — — — .016 MIN		ANGLES		±
		WEIGHT		

FORMTEK

DRAWN