

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-1S17D8-263

CW-B8655

CATALOG LISTING

V7-1S17D8-263

PAGE 1 OF 1

REPLACES
PR-18499

M

ISSUE
6

REVISIONS

A	CO-69205	BAB	7 JAN 91
B	CO-76198	J A L	17 NOV 93
C	CO-77116	DCS	31 MAR 94
D	CO-93311	TSM	22 OCT 98
E	0085964	SBH	30 JAN 12

CHECK

30 JAN 12

CMH

CHECK

22 AUG 90

WJC



CHECK

15 AUG 90

W L S

RASTER

DRAWN

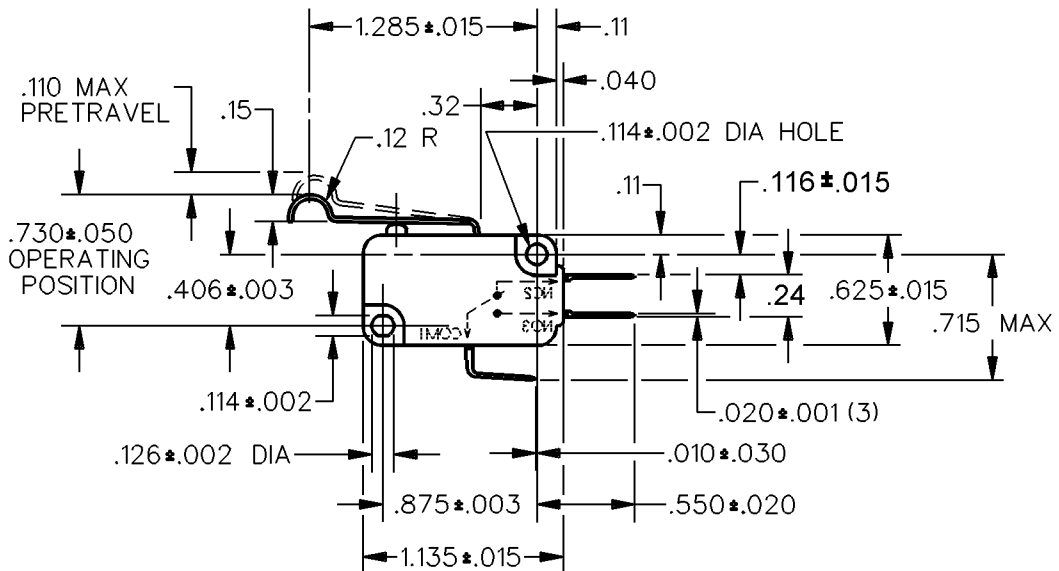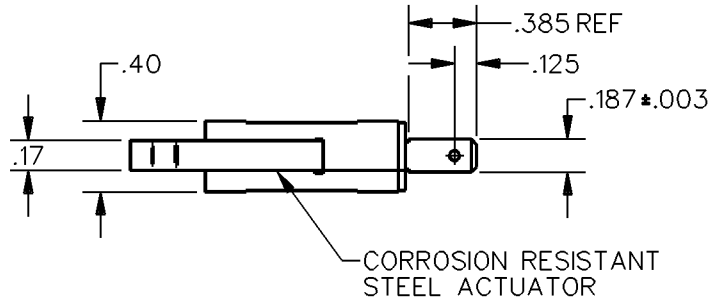


NOTE

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE -----90 GRAM MAX
RELEASE FORCE -----9 GRAM MIN
DIFFERENTIAL TRAVEL-----.030 MAX
OVERTRAVEL -----.075 MIN
RELEASE TRAVEL -----.015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

0.1A 125 VAC L142



SCALE NONE DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT