


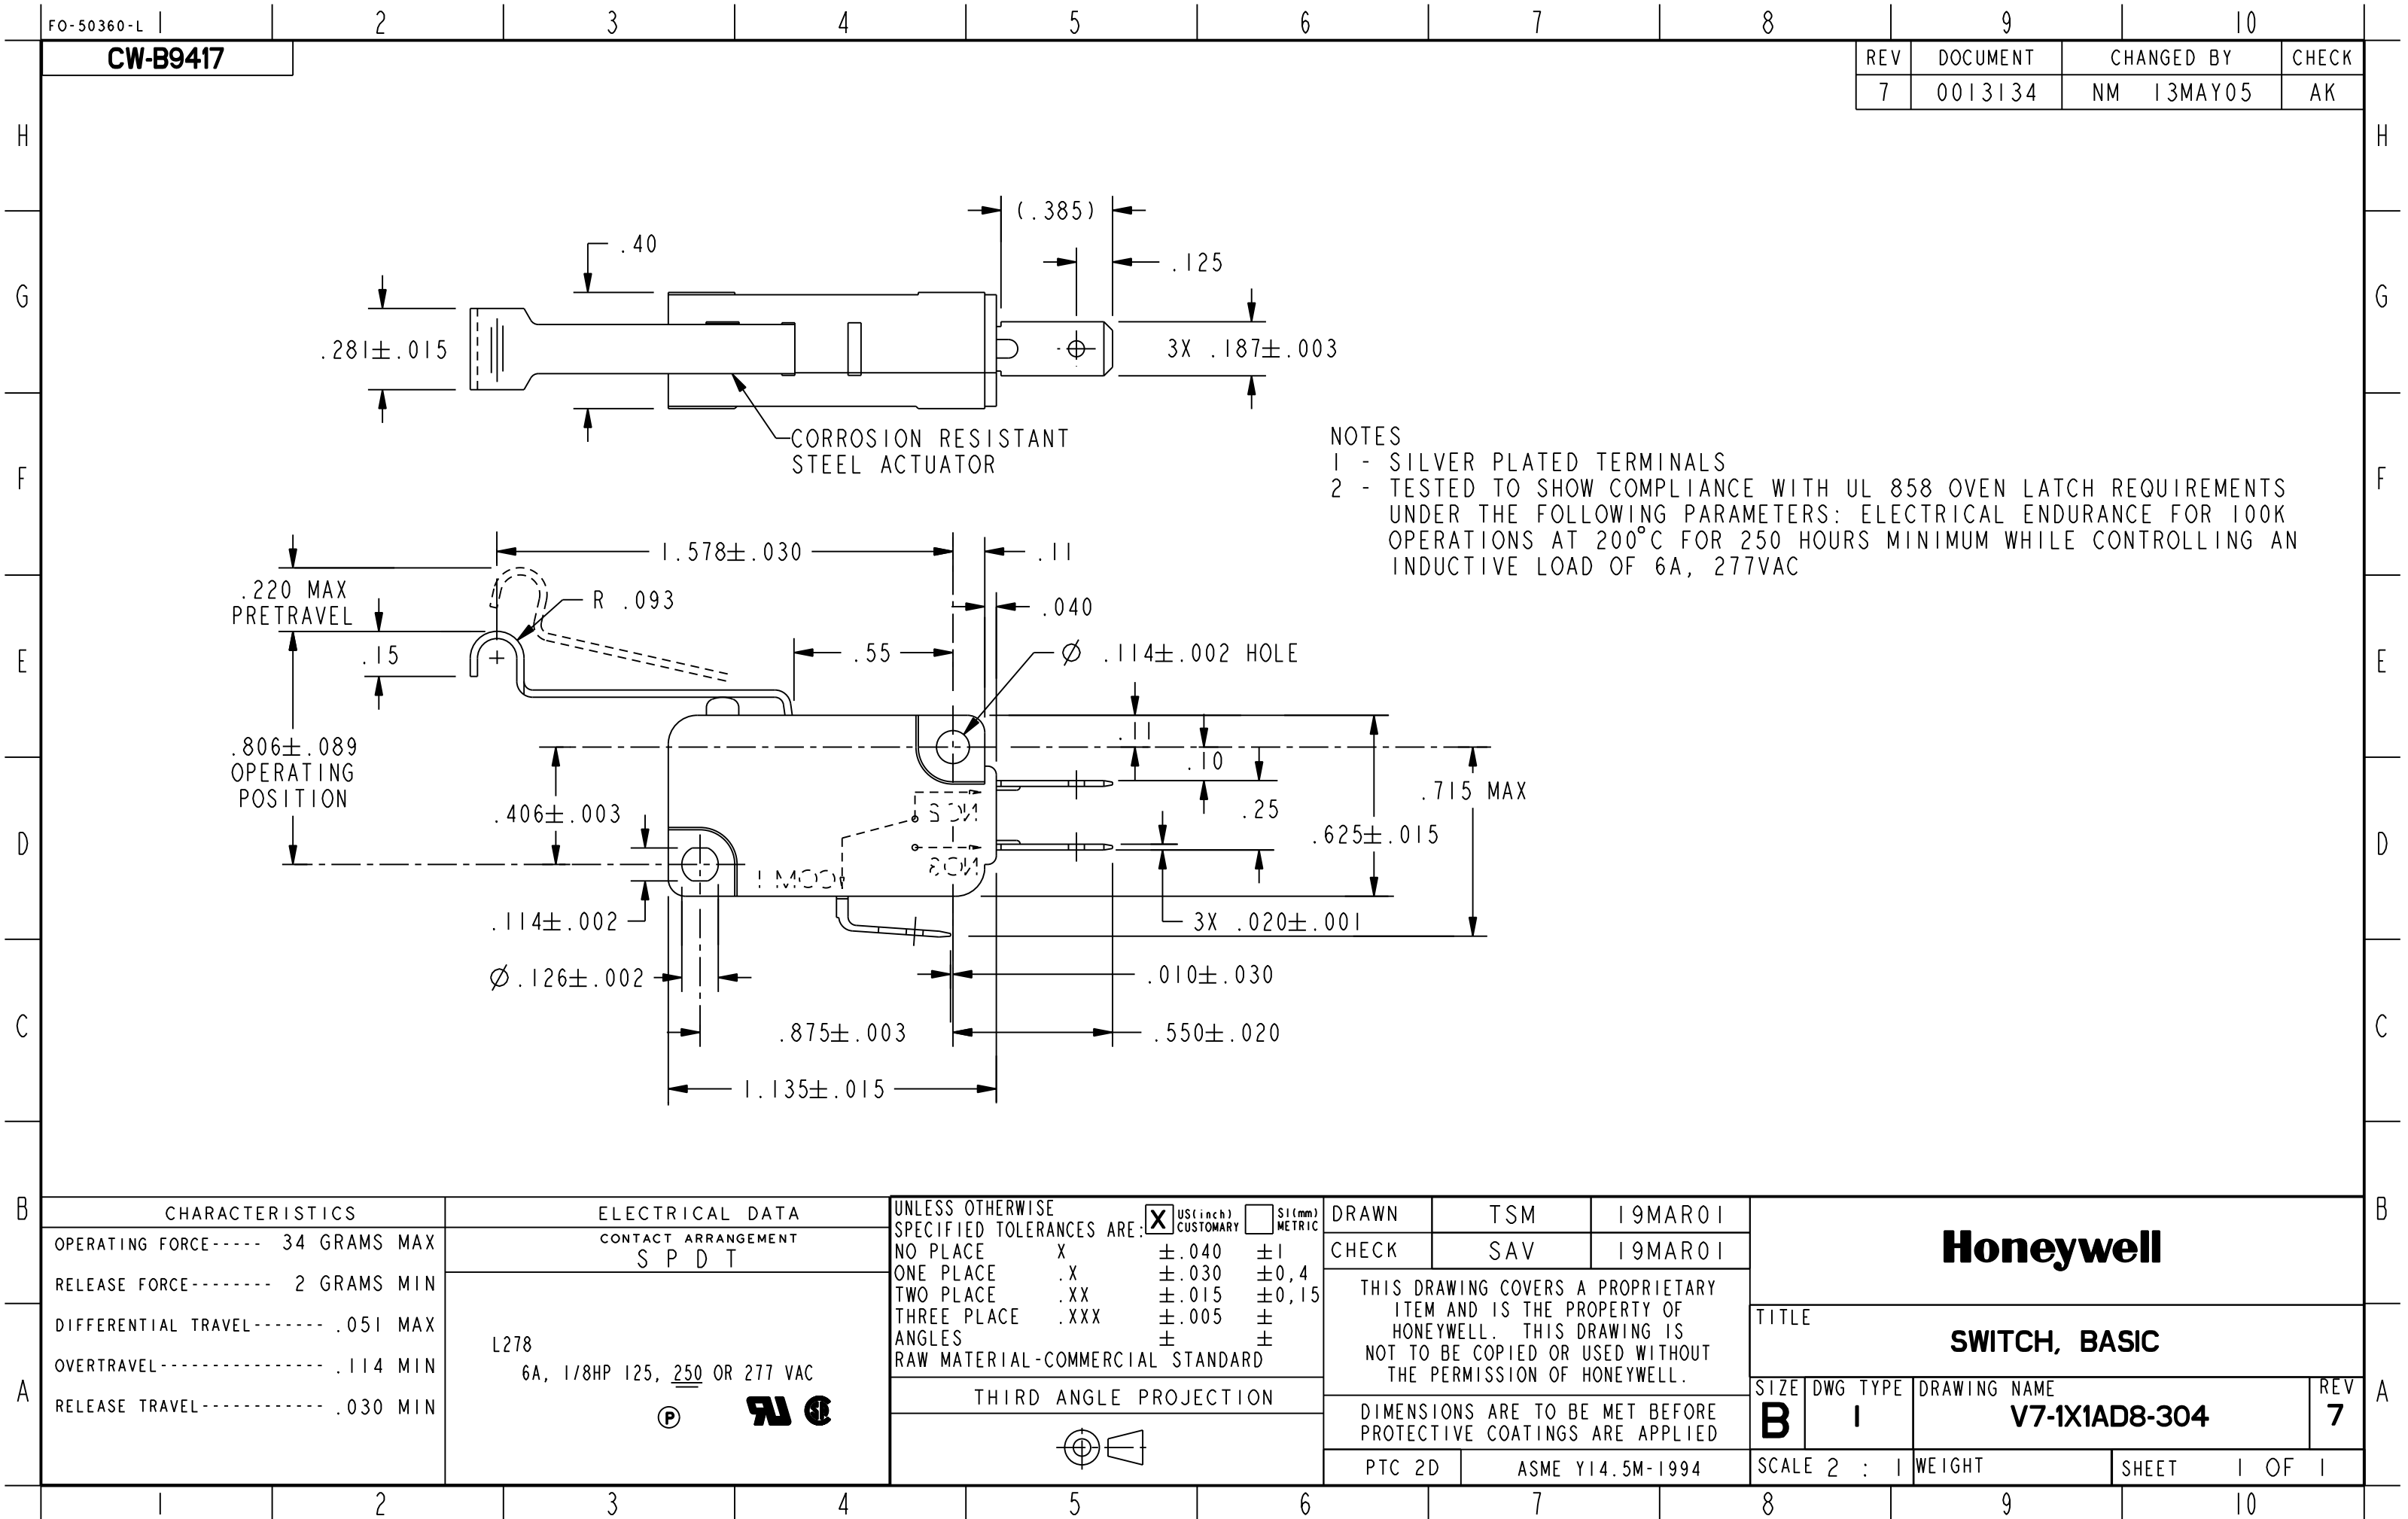

CW-B9417

| REV | DOCUMENT | CHANGED BY | CHECK |
|-----|----------|------------|-------|
| 7   | 0013134  | NM 13MAY05 | AK    |

NOTES  
1 - SILVER PLATED TERMINALS  
2 - TESTED TO SHOW COMPLIANCE WITH UL 858 OVEN LATCH REQUIREMENTS UNDER THE FOLLOWING PARAMETERS: ELECTRICAL ENDURANCE FOR 100K OPERATIONS AT 200°C FOR 250 HOURS MINIMUM WHILE CONTROLLING AN INDUCTIVE LOAD OF 6A, 277VAC

| CHARACTERISTICS                   |  | ELECTRICAL DATA                                                                                                         |  | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:<br><div><div><input checked="" type="checkbox"/> US (inch) CUSTOMARY</div><div><input type="checkbox"/> SI (mm) METRIC</div></div> <div>NO PLACE X ±.040 ±1</div> <div>ONE PLACE .X ±.030 ±0,4</div> <div>TWO PLACE .XX ±.015 ±0,15</div> <div>THREE PLACE .XXX ±.005 ±</div> <div>ANGLES ± ±</div> <div>RAW MATERIAL-COMMERCIAL STANDARD</div> |  | DRAWN | TSM | 19MAR01                                                         |  | <div>Honeywell</div> |          |               |  |     |
|-----------------------------------|--|-------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------|-----|-----------------------------------------------------------------|--|----------------------|----------|---------------|--|-----|
| OPERATING FORCE----- 34 GRAMS MAX |  | CONTACT ARRANGEMENT<br>S P D T                                                                                          |  |                                                                                                                                                                                                                                                                                                                                                                                            |  | CHECK | SAV | 19MAR01                                                         |  |                      |          |               |  |     |
| RELEASE FORCE----- 2 GRAMS MIN    |  | <div>L278</div> <div>6A, 1/8HP 125, <u>250</u> OR 277 VAC</div> <div><div><div></div></div><div><div></div></div></div> |  | THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.                                                                                                                                                                                                                                     |  |       |     | TITLE<br>SWITCH, BASIC                                          |  |                      |          |               |  |     |
| DIFFERENTIAL TRAVEL----- .051 MAX |  |                                                                                                                         |  |                                                                                                                                                                                                                                                                                                                                                                                            |  |       |     |                                                                 |  |                      |          |               |  |     |
| OVERTRAVEL----- .114 MIN          |  |                                                                                                                         |  | THIRD ANGLE PROJECTION                                                                                                                                                                                                                                                                                                                                                                     |  |       |     | DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED |  | SIZE                 | DWG TYPE | DRAWING NAME  |  | REV |
| RELEASE TRAVEL----- .030 MIN      |  |                                                                                                                         |  | <div><div></div></div>                                                                                                                                                                                                                                                                                                                                                                     |  |       |     | PTC 2D ASME Y14.5M-1994                                         |  | B                    | I        | V7-1X1AD8-304 |  | 7   |
|                                   |  |                                                                                                                         |  |                                                                                                                                                                                                                                                                                                                                                                                            |  |       |     | SCALE 2 : 1                                                     |  | WEIGHT               |          | SHEET 1 OF 1  |  |     |