FO-50360-L

CW-B9451

REV	DOCUMENT	CHANGED BY	CHECK
3	201649	JLH 13NOV00	SAV
4	202874	JLH 17APR01	SAV
5	0012441	KSR 13APR05	AK
6	0012914	KR 03MAY05	AK

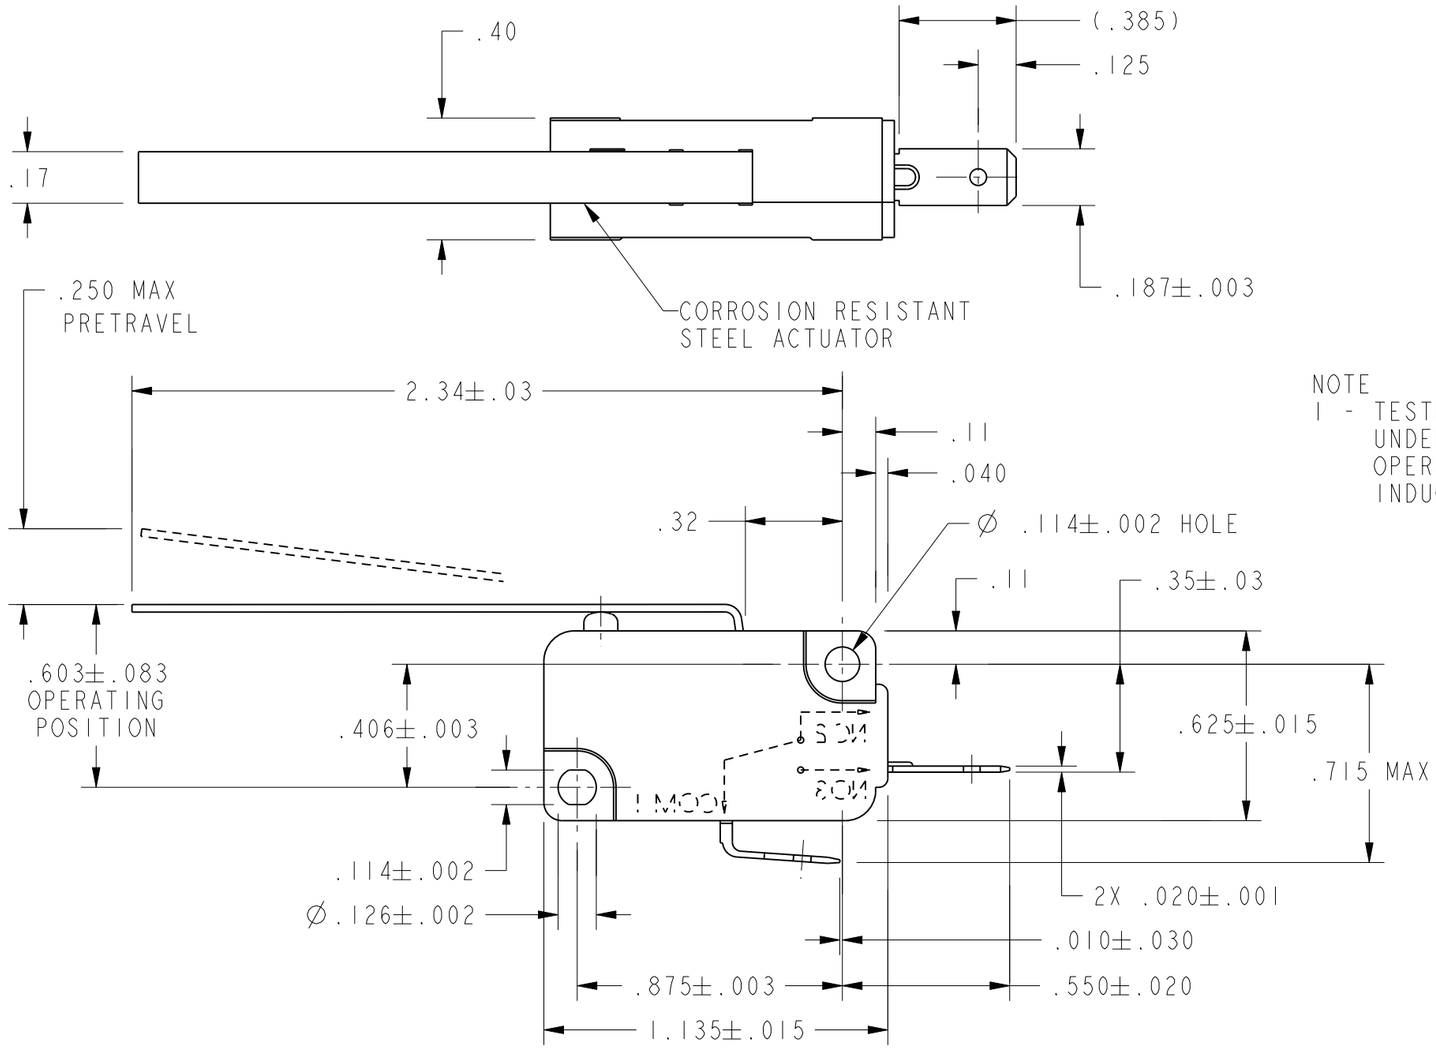

NOTE
1 - TESTED TO SHOW COMPLIANCE WITH UL 858 OVEN LATCH REQUIREMENTS UNDER THE FOLLOWING PARAMETERS: ELECTRICAL ENDURANCE FOR 100K OPERATIONS AT 200°C FOR 250 HOURS MINIMUM WHILE CONTROLLING AN INDUCTIVE LOAD OF 6A, 277VAC

CHARACTERISTICS	
OPERATING FORCE-----	35 GRAMS MAX
RELEASE FORCE--------	2 GRAMS MIN
DIFFERENTIAL TRAVEL-------	.054 MAX
OVERTRAVEL----------	.124 MIN
RELEASE TRAVEL----------	.030 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

L278
6A, 1/8HP 125, 250 OR 277 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	JLH	13NOV00
CHECK	SAV	13NOV00

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-1X2AD8-048	6

SCALE NONE | WEIGHT | SHEET 1 OF 1