


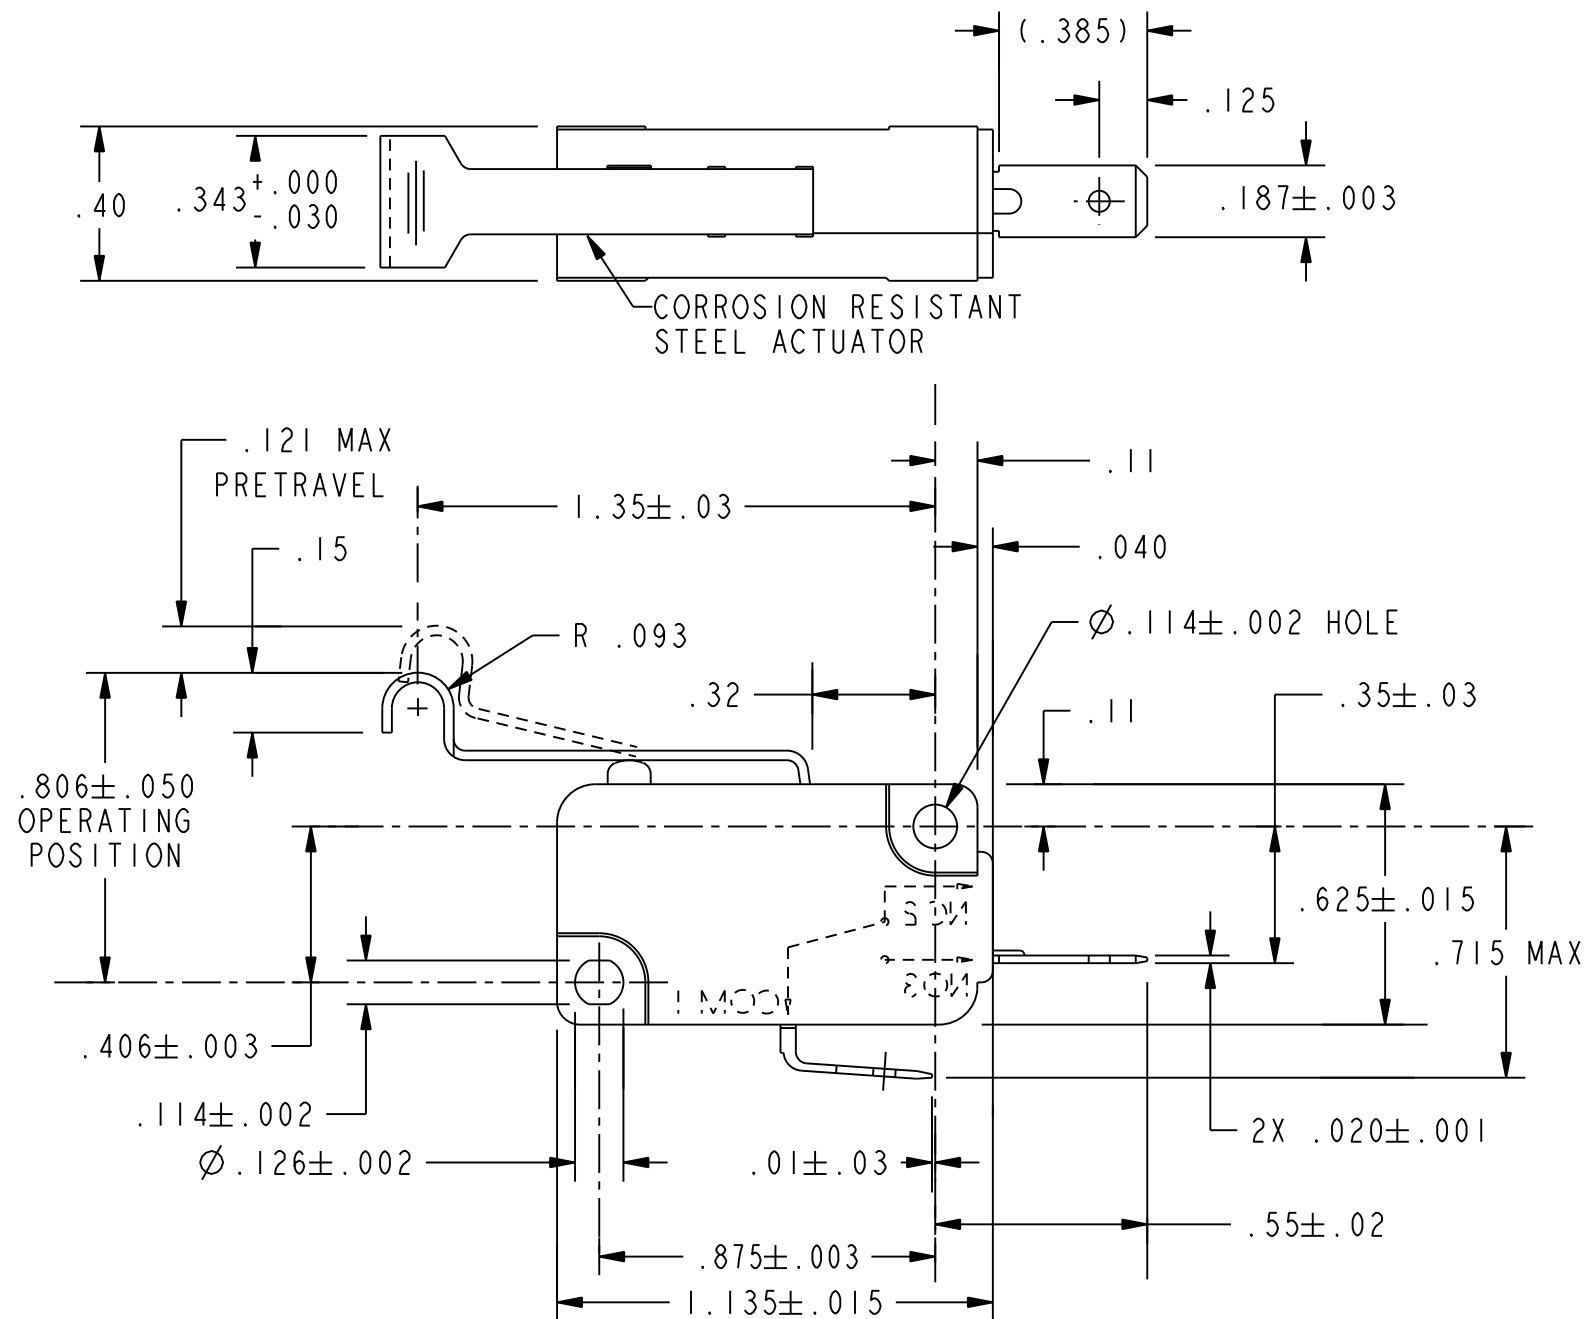

NOTES

1 - SILVER PLATED TERMINALS
2 - TESTED TO SHOW COMPLIANCE WITH UL 858 OVEN LATCH REQUIREMENTS
UNDER THE FOLLOWING PARAMETERS: ELECTRICAL ENDURANCE FOR 100K
OPERATIONS AT 200°C FOR 250 HOURS MINIMUM WHILE CONTROLLING AN
INDUCTIVE LOAD OF 6A, 277VAC

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN	TSM	5FEB02	Honeywell			
OPERATING FORCE----- 66 GRAMS MAX		CONTACT ARRANGEMENT S P N O		NO PLACE X ±.040 ±1		CHECK	SAV	5FEB02				
RELEASE FORCE----- 5 GRAMS MIN		L278 6A, 1/8HP 125, <u>250</u> OR 277 VAC Ⓟ		ONE PLACE .X ±.030 ±0,4		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED			TITLE SWITCH, BASIC			
DIFFERENTIAL TRAVEL----- .027 MAX				TWO PLACE .XX ±.015 ±0,15								
OVERTRAVEL----- .068 MIN				THREE PLACE .XXX ±.005 ±		PTC 2D ASME Y14.5M-1994			SIZE DWG TYPE DRAWING NAME REV B I V7-1X2AD8-295 4			
RELEASE TRAVEL----- .016 MIN				ANGLES ± ±								
				THIRD ANGLE PROJECTION								
				