
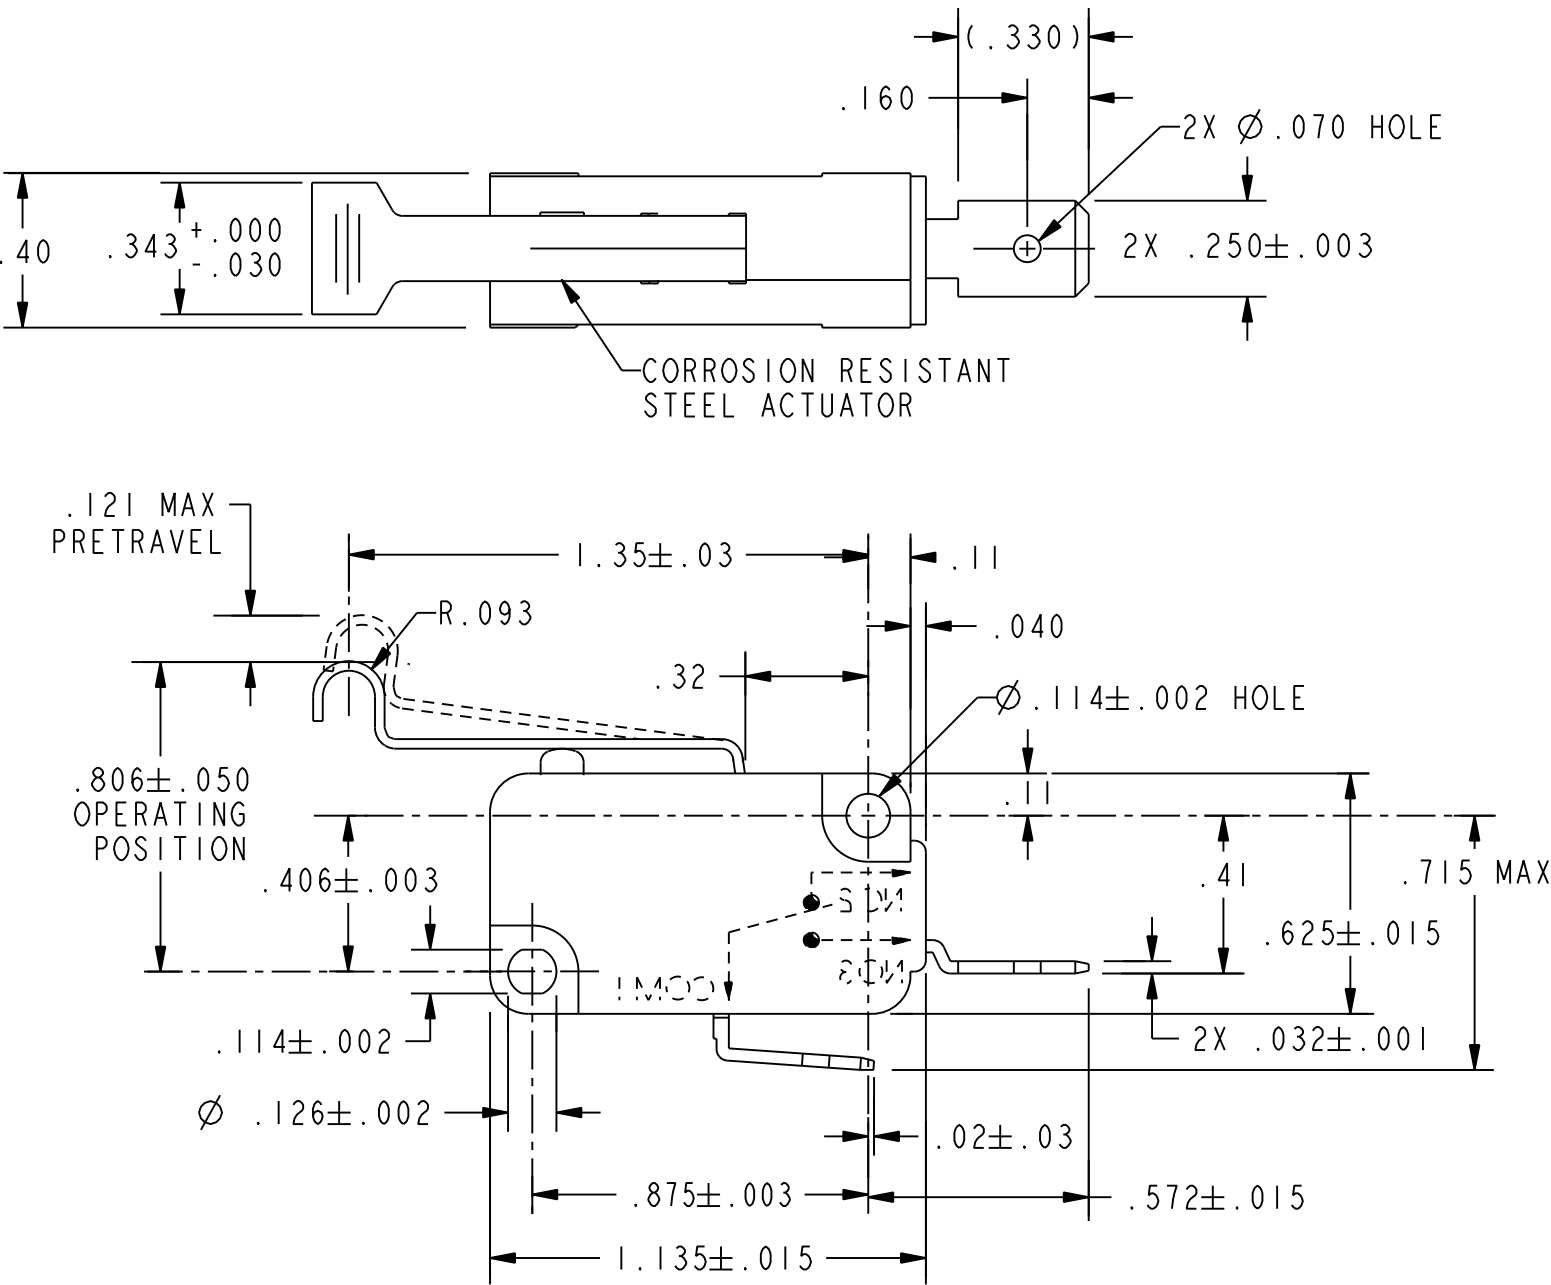


CW-B9435

REV	DOCUMENT	CHANGED BY	CHECK
4	0013134	NM 13MAY05	AK



- NOTES
- 1 - SILVER PLATED TERMINALS
 - 2 - TESTED TO SHOW COMPLIANCE WITH UL 858 OVEN LATCH REQUIREMENTS UNDER THE FOLLOWING PARAMETERS: ELECTRICAL ENDURANCE FOR 100K OPERATIONS AT 200°C FOR 250 HOURS MINIMUM WHILE CONTROLLING AN INDUCTIVE LOAD OF 6A, 277VAC

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ☒ US (inch) CUSTOMARY ☐ SI (mm) METRIC NO PLACE X ±.040 ±1 ONE PLACE .X ±.030 ±0,4 TWO PLACE .XX ±.015 ±0,15 THREE PLACE .XXX ±.005 ± ANGLES ± ± RAW MATERIAL-COMMERCIAL STANDARD				DRAWN	TSM	5FEB02	Honeywell			
OPERATING FORCE----- 66 GRAMS MAX		CONTACT ARRANGEMENT S P N O						CHECK	SAV	5FEB02				
RELEASE FORCE----- 5 GRAMS MIN		L278 6A, 1/8HP 125, <u>250</u> OR 277 VAC ☐ P  		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH, BASIC						
DIFFERENTIAL TRAVEL----- .027 MAX														
OVERTRAVEL----- .068 MIN				THIRD ANGLE PROJECTION 				DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		SIZE	DWG TYPE	DRAWING NAME		REV
RELEASE TRAVEL----- .016 MIN								PTC 2D		ASME Y14.5M-1994		B	I	V7-1X2AE9-295
								SCALE	2 : 1	WEIGHT		SHEET 1 OF 1		