


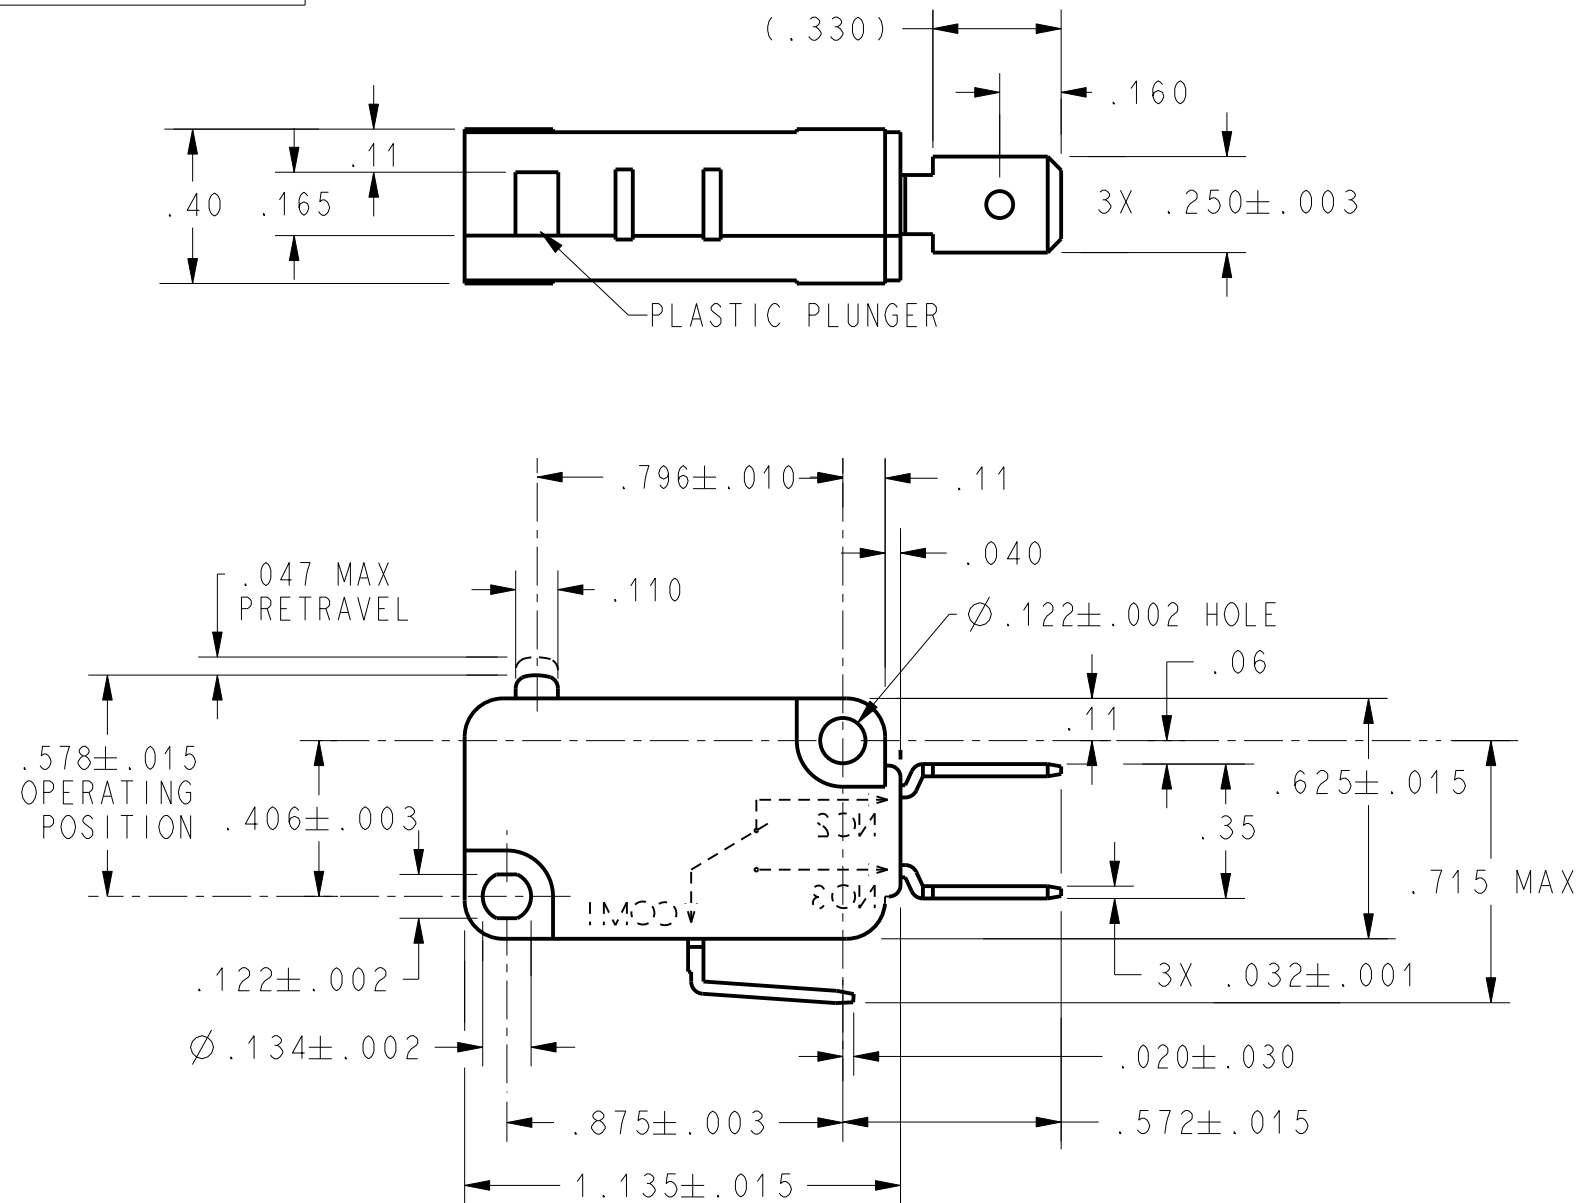

NOTES

1 - MAXIMUM MECHANICAL DEAD BREAK OF .0025 MAY BE EXPECTED WITH THIS SWITCH CONSTRUCTION

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN		TSM		17FEB03		Honeywell			
OPERATING FORCE ---·225 GRAMS MAX		CONTACT ARRANGEMENT S P D T		US (inch) CUSTOMARY SI (mm) METRIC NO PLACE X ±.040 ±1 ONE PLACE .X ±.030 ±0.4 TWO PLACE .XX ±.015 ±0.15 THREE PLACE .XXX ±.005 ± ANGLES ± ± RAW MATERIAL-COMMERCIAL STANDARD		CHECK		SAV		17FEB03					
RELEASE FORCE ----- 20 GRAMS MIN		25A, 277 VAC 1HP, 125 VAC 2HP, 250 VAC		THIRD ANGLE PROJECTION		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH, BASIC							
DIFFERENTIAL TRAVEL ----- .010 MAX		SIZE										DWG TYPE		DRAWING NAME	
OVERTRAVEL ----- .050 MIN		20 (5) 250 T85 1E5 μ CE UL 05		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		B		I		V7-1Z10E9		5			
FREE POSITION ----- .625 MAX						SCALE		2:1		WEIGHT		SHEET 1 OF 1			
RELEASE TRAVEL ----- .010 MIN						PTC 2D		ASME Y14.5M-1994							