FO-50360-L

CW-B9703

REV	DOCUMENT	CHANGED BY	CHECK
1	206932	CSL 25NOV02	SAV

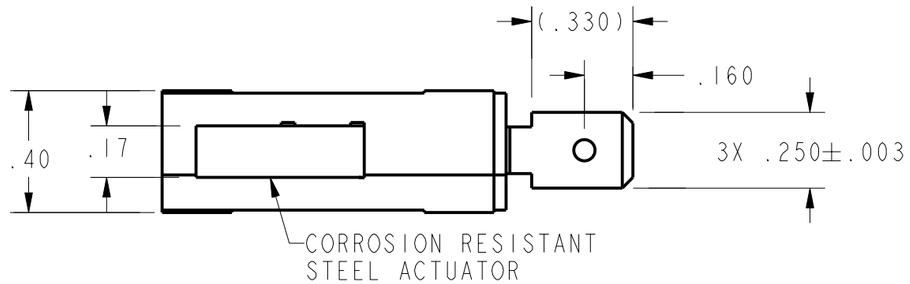

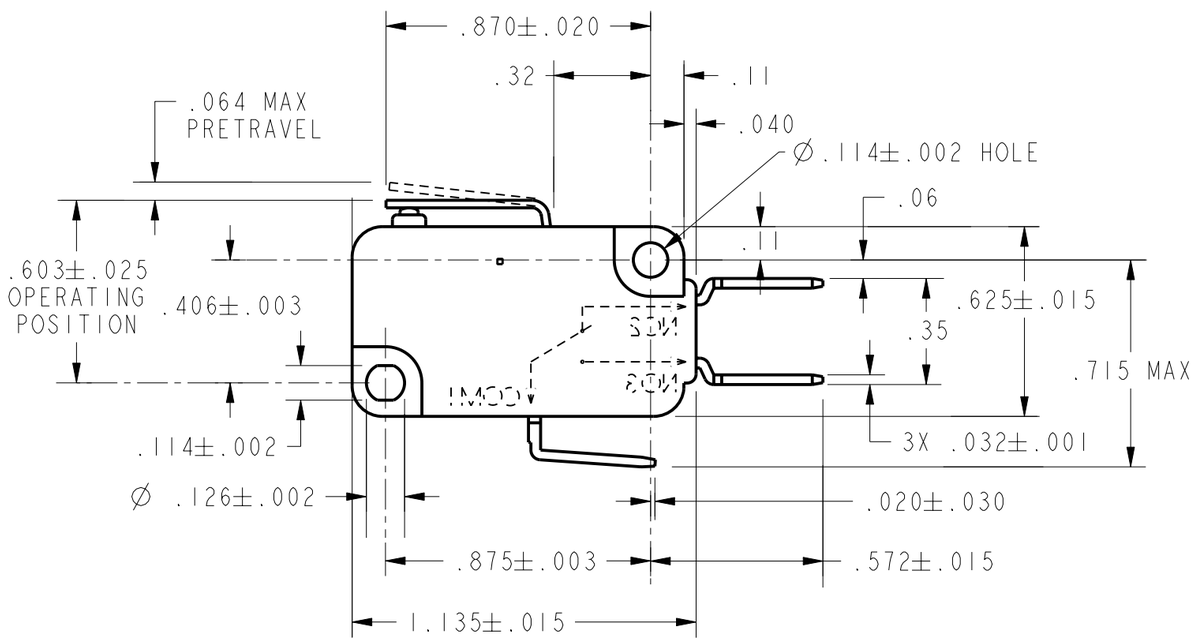

NOTE
1 - THIS SWITCH CONSTRUCTION CAN HAVE UP TO .0035 OF MECHANICAL DEAD BREAK

CHARACTERISTICS	
OPERATING FORCE	234 GRAMS MAX
RELEASE FORCE	13 GRAMS MIN
DIFFERENTIAL TRAVEL	.014 MAX
OVERTRAVEL	.037 MIN
RELEASE TRAVEL	.009 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
25A, 277 VAC 1HP, 125 VAC 2HP, 250 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	CSL	25NOV02
CHECK	SAV	25NOV02

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-1Z13E9-002	1

SCALE 2:1 | WEIGHT | SHEET 1 OF 1