
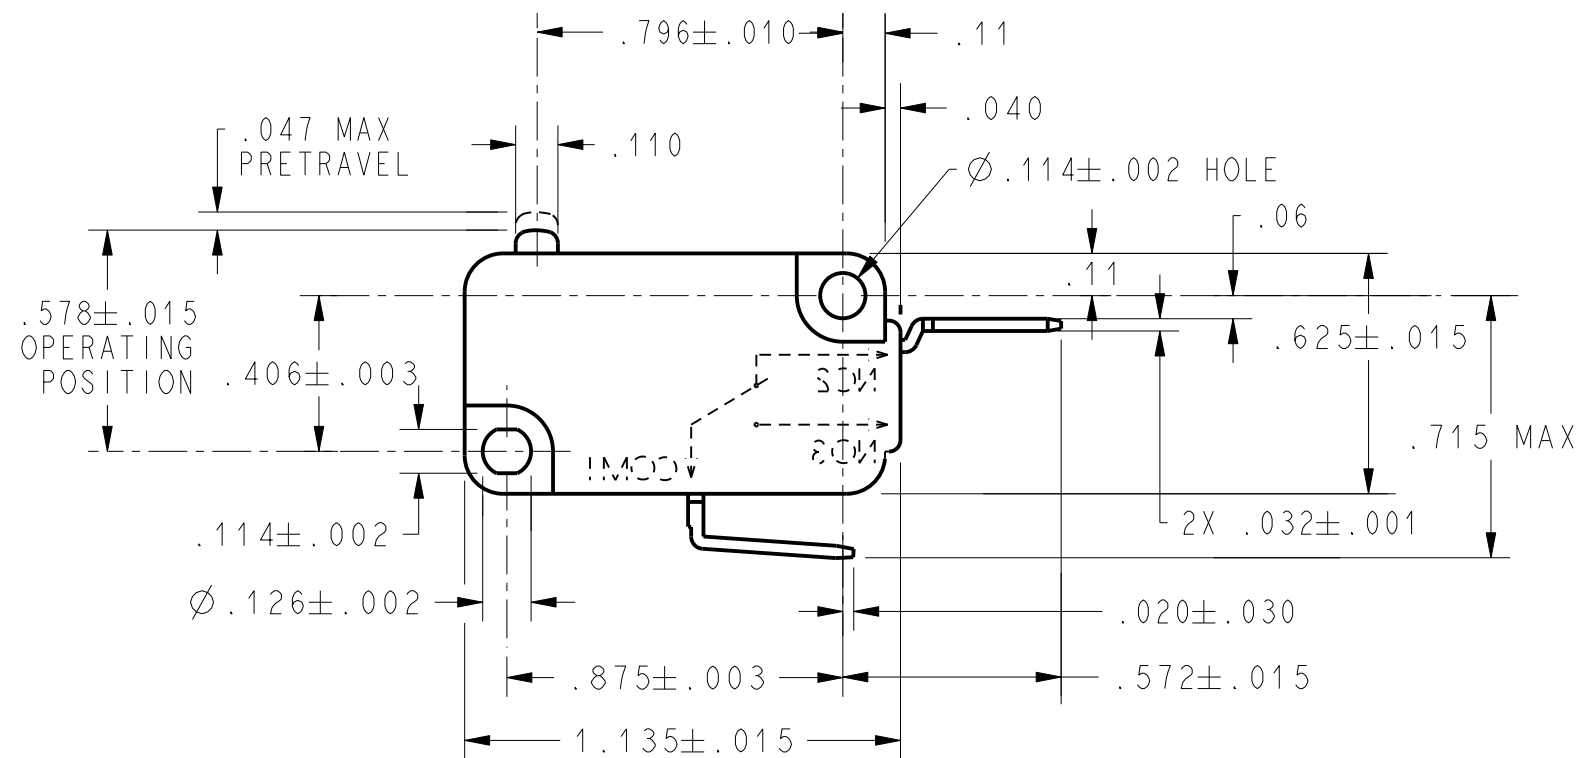



CW-B9766

REV	DOCUMENT	CHANGED BY	CHECK
3	207443	TSM 17FEB03	SAV
4	0001305	CSL 2SEP03	SAV

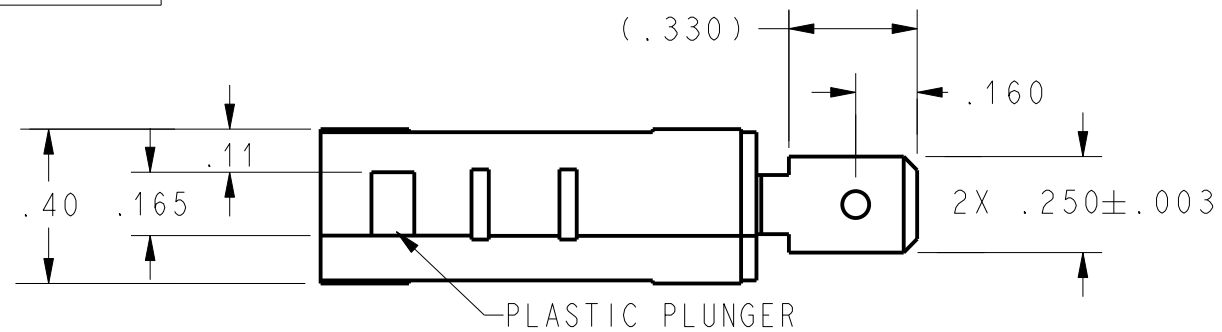

NOTE

1 - MAXIMUM MECHANICAL DEAD BREAK OF .0025 MAY BE EXPECTED WITH THIS SWITCH CONSTRUCTION

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		DRAWN	TSM	17FEB03	Honeywell								
OPERATING FORCE ---·225 GRAMS MAX		CONTACT ARRANGEMENT S P N C		NO PLACE X ±.040 ±1		CHECK	SAV	17FEB03									
RELEASE FORCE ----- 20 GRAMS MIN		25A, 277 VAC		ONE PLACE .X ±.030 ±0,4		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, BASIC								
DIFFERENTIAL TRAVEL ----- .010 MAX		1HP, 125 VAC		TWO PLACE .XX ±.015 ±0,15													
OVERTRAVEL ----- .050 MIN		2HP, 250 VAC		THREE PLACE .XXX ±.005 ±													
FREE POSITION ----- .625 MAX		CE 		ANGLES ± ±		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED			SIZE DWG TYPE DRAWING NAME REV B I V7-1Z39E9 4								
RELEASE TRAVEL ----- .010 MIN		 		THIRD ANGLE PROJECTION													
						PTC 2D			ASME Y14.5M-1994			SCALE 2 : 1		WEIGHT		SHEET 1 OF 1	