

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-2A17D8-207

CW-B0216

CATALOG LISTING

V7-2A17D8-207

REPLACES

RELEASE NO. PR-19239

ISSUE

3

CHECK

30 JAN 12

CMH

CHECK

12 JUN 91

DAW



CHECK

6 JUN 91

WJC

RASTER


DRAWN

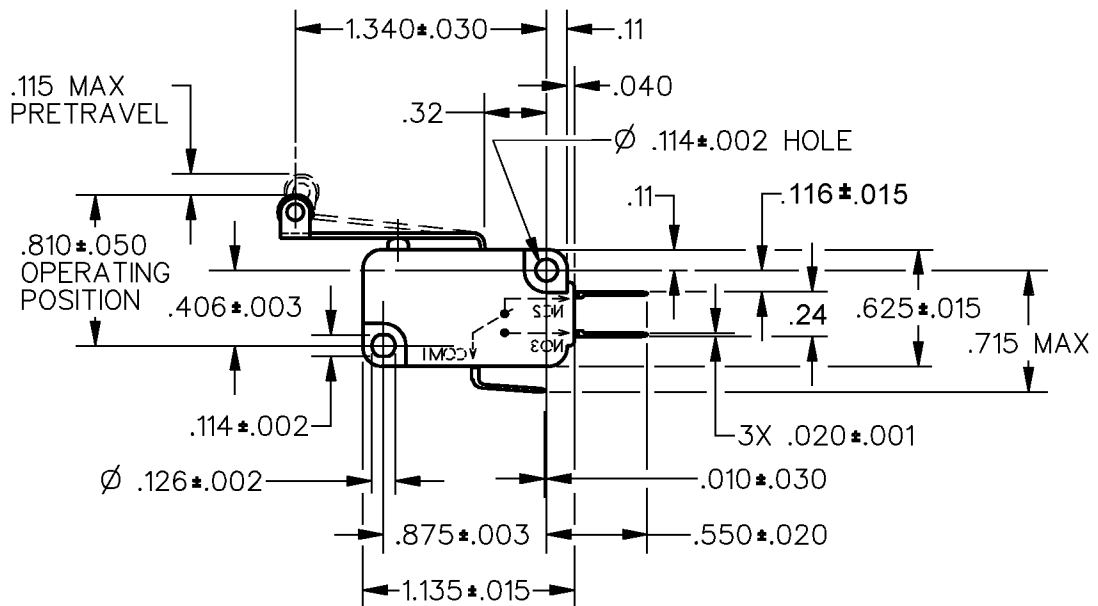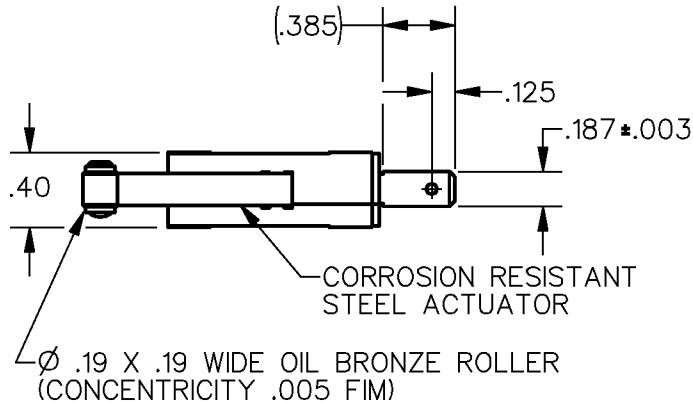

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE---43 GRAMS MAX
RELEASE FORCE---3 GRAMS MIN
DIFFERENTIAL TRAVEL---.025 MAX
OVERTRAVEL---.060 MIN
RELEASE TRAVEL---.016 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L162 5A 125, 250, 277 VAC
1/10HP 250 VAC



SCALE NONE

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT