

FED.MFG.CODE 91929

CW-B0468

V7-2A27D8

CATALOG LISTING

M

3
ISSUE

REVISIONS

A	CO- 76065
G R T 2 OCT 93	

B	0014625
NM 25JUL05	

REPLACES X91936-V7

RELEASE NO. PR-17885

CHECK

PRJ

CHECK	
-------	--

90

6	
---	--



С	К
---	---

067

5

I

DDM/CAD

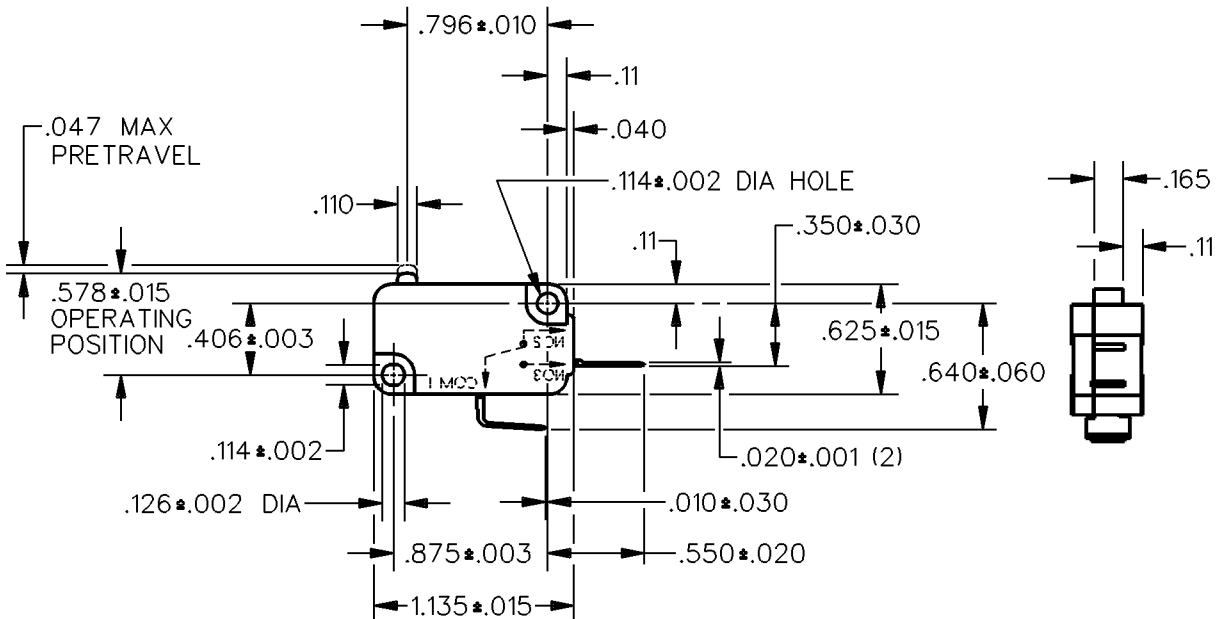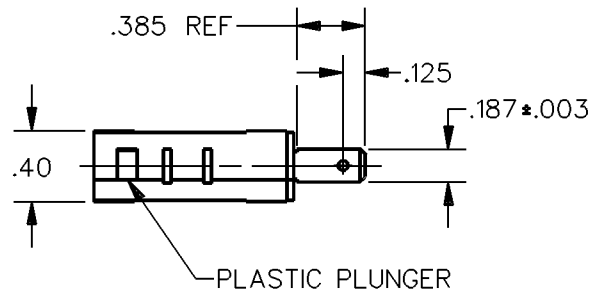


NOTES

- 1 - SWITCH WILL OPERATE AND RELEASE WITHIN FULL EXCURSION OF THE PLUNGER
- 2 - PLUNGER WILL TRAVEL FLUSH WITH CASE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 75 GRAM MAX	CONTACT ARRANGEMENT S P N O	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 10 GRAM MIN		ONE PLACE (.0)	± .030
DIFFERENTIAL TRAVEL — — — .002 — .010	L162 5A 125, <u>250</u> , 277 VAC 1/10HP <u>250</u> VAC	TWO PLACE (.00)	± .015
OVERTRAVEL — — — — .050 MIN		THREE PLACE (.000)	± .005
FREE POSITION — — — — .625 MAX		ANGLES	±
RELEASE TRAVEL — — — — .010 MIN		WEIGHT	