MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH–BASIC

CATALOG LISTING
V7–2B17P02

CW–B3065

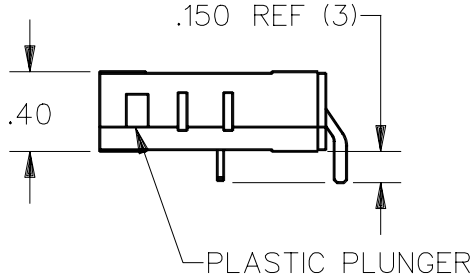

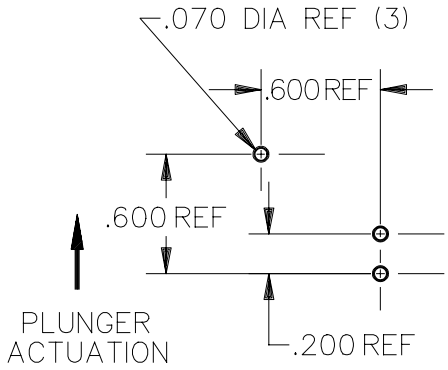

TERMINATION PATTERN

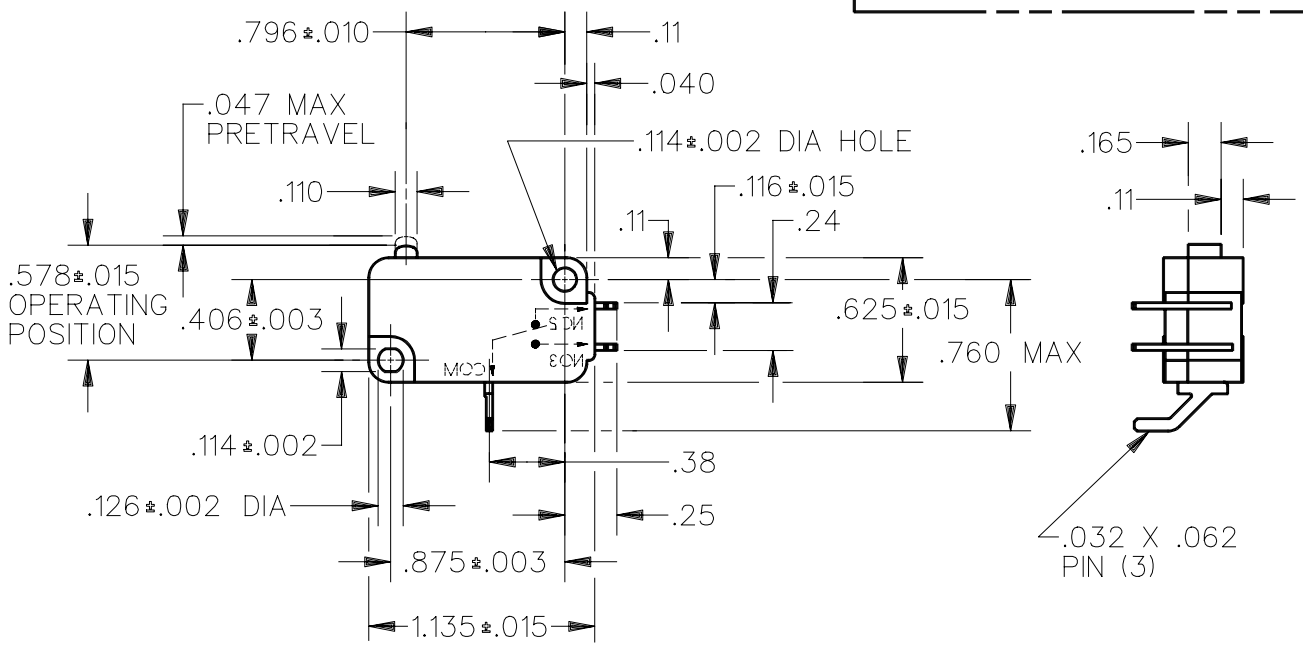

NOTE
1 – TERMINATION MAY REQUIRE STUFFING INTO BOARD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE	75 GRAMS MAX
RELEASE FORCE	10 GRAMS MIN
DIFFERENTIAL TRAVEL	.002–.010
OVERTRAVEL	.050 MIN
FREE POSITION	.625 MAX
RELEASE TRAVEL	.010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
1/2A 125 VDC, 1/4A 250 VDC
4A 125 VAC "L"

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

CATALOG LISTING V7–2B17P02 PAGE 1 OF 1
ISSUE 3
RELEASE NO. PR–19090
REPLACES X93671–V7

REVISIONS

A	CO 74613	G R T 12 APR 93
B	CO–79143	DCS 20 JUL 95

	DRAWN	CHECK
B	15 MAR 91	
A	W J C 15 MAR 91	CHECK
		CHECK
		CHECK

DDM/CAD