

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH — BASIC

CATALOG LISTING


V7-2B27D8-022

CW-B3121

CATALOG LISTING
V7-2B27D8-022
REPLACES
RELEASE NO. PR-19706
CHECK
M
ISSUE
4

REVISIONS
A RELEASE PR19706
W J C
12 NOV 91
B C071963
GRT
8 JAN 92
C C0-76215
LJF
11 NOV 93


DDM/CAD
DRAWN
WJC 12 NOV 91
CHECK
LAD 13 NOV 91
CHECK

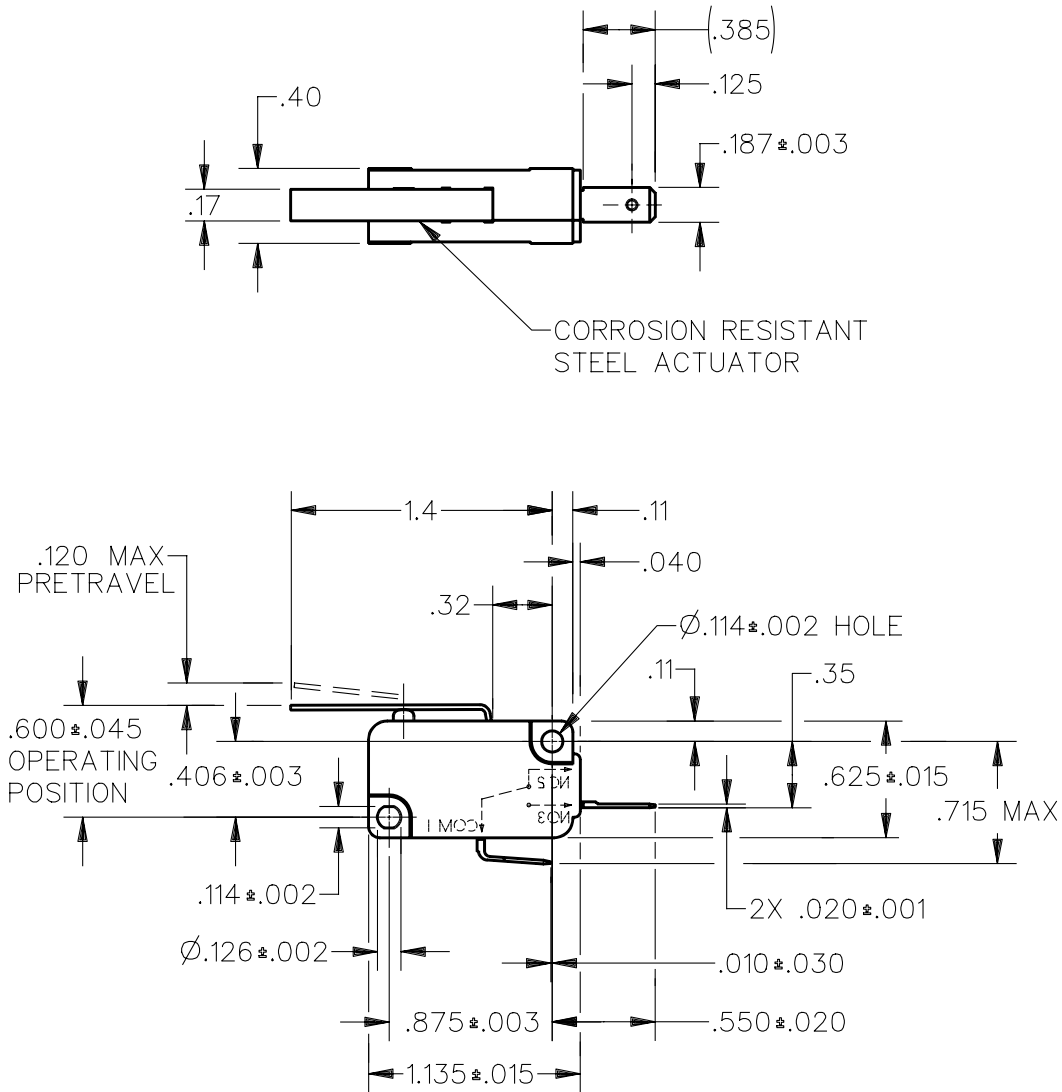

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — 41 GRAMS MAX	CONTACT ARRANGEMENT S P N O L156 11A 1/3HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"  	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE TRAVEL— — — — .017 MIN		ONE PLACE (.0)	± .030
RELEASE FORCE — — — — 3 GRAMS MIN		TWO PLACE (.00)	± .015
DIFFERENTIAL TRAVEL — — — .030 MAX		THREE PLACE (.000)	± .005
OVERTRAVEL — — — — — .067 MIN		ANGLES	±
		WEIGHT	

