

CATALOG LISTING

V7-2B27P07

PAGE 1 OF 1

2
SUE

REVISIONS

A	REL PR21274
---	----------------

17 DCS
AUG 94

DDM/CAD

DRAWN

REPLACES

RELEASE NO. PR-21274

CHECK


CHECK

CHECK


AYC

12



cc



—PLASTIC PLUNGER




TERMINATION PATTERN

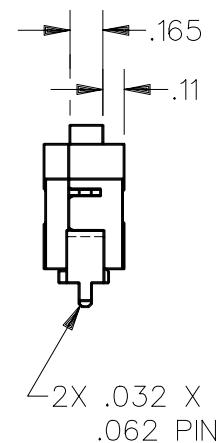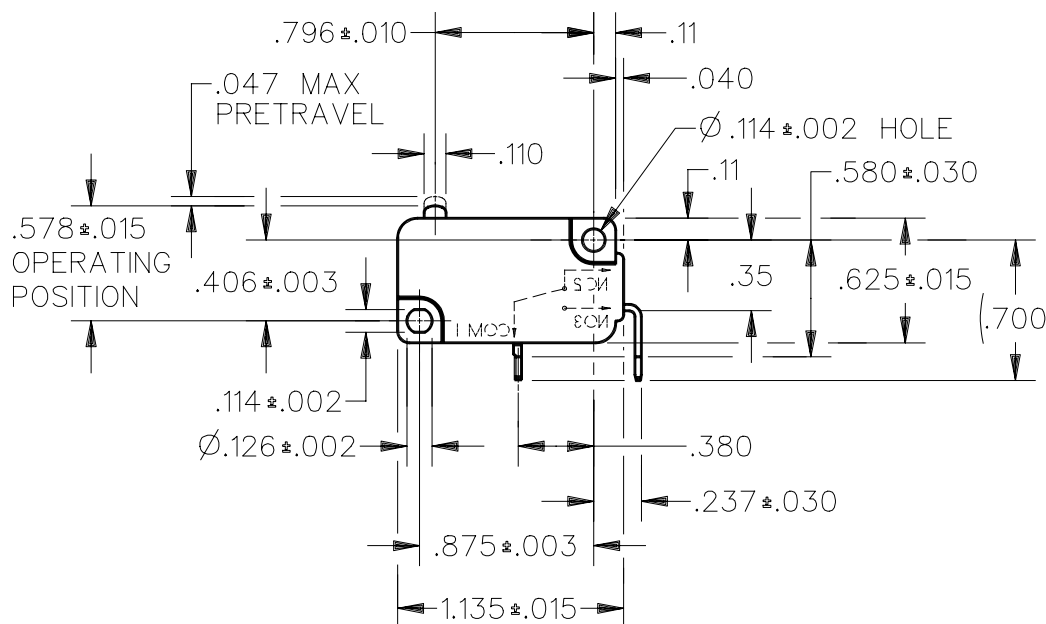

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE— — —75 GRAMS MAX	CONTACT ARRANGEMENT S P N O	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE— — —10 GRAMS MIN		ONE PLACE (. 0)	± .030
DIFFERENTIAL TRAVEL— — —.002—.010	L156 11A 1/3HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"	TWO PLACE (. 00)	± .015
RELEASE TRAVEL— — — ——.010 MIN		THREE PLACE (. 000)	± .005
OVERTRAVEL— — — ——.050 MIN		ANGLES	±
FREE POSITION— — — ——.625 MAX		WEIGHT	