
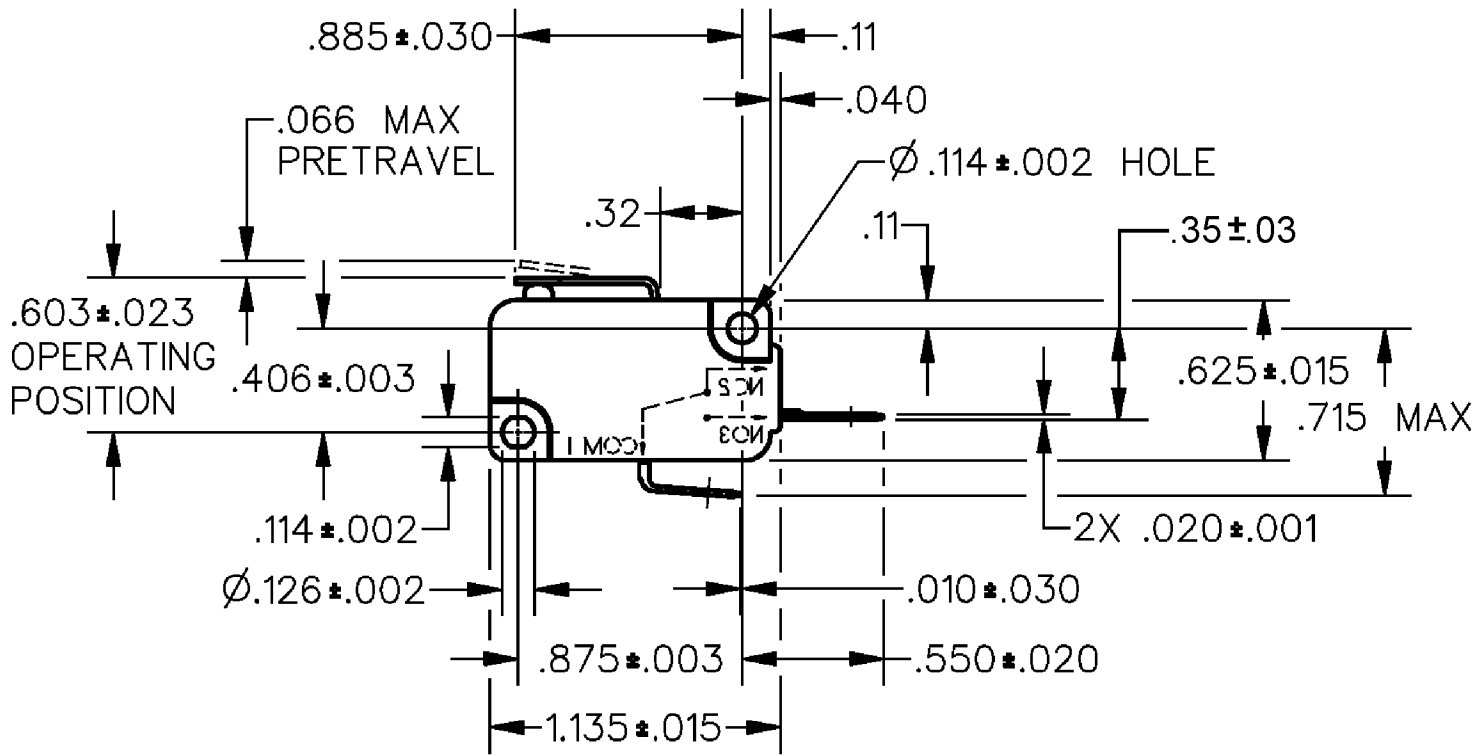


HONEYWELL PART NUMBER
V7-2B29D8-384
CWB3164

REV	DOCUMENT	CHANGED BY	CHECK
B	0013170	SPK 13MAR05	AK

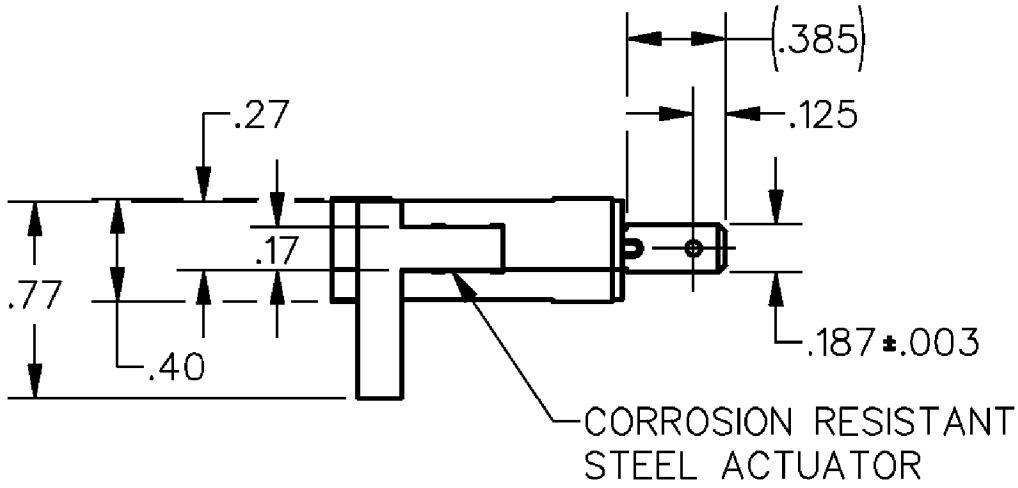

REPLACES: X115883-V7

CHARACTERISTICS
OPERATING FORCE— — —76 GRAMS MAX
RELEASE FORCE— — —6 GRAMS MIN
DIFFERENTIAL TRAVEL— — —.015 MAX
OVERTRAVEL— — — — —.038 MIN
RELEASE TRAVEL— — — — —.009 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P N O
L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"
10 (3) 250 ~ T85 IE5µ
CE RoHS UL

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	DVM	21APR05
CHECK	AK	21APR05
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE B	TYPE I	DRAWING NAME V7-2B29D8-384	REV B
SCALE	-	SHEET	1 OF 1