MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH–BASIC

CATALOG LISTING
V7–2S17D8
CW–B8602

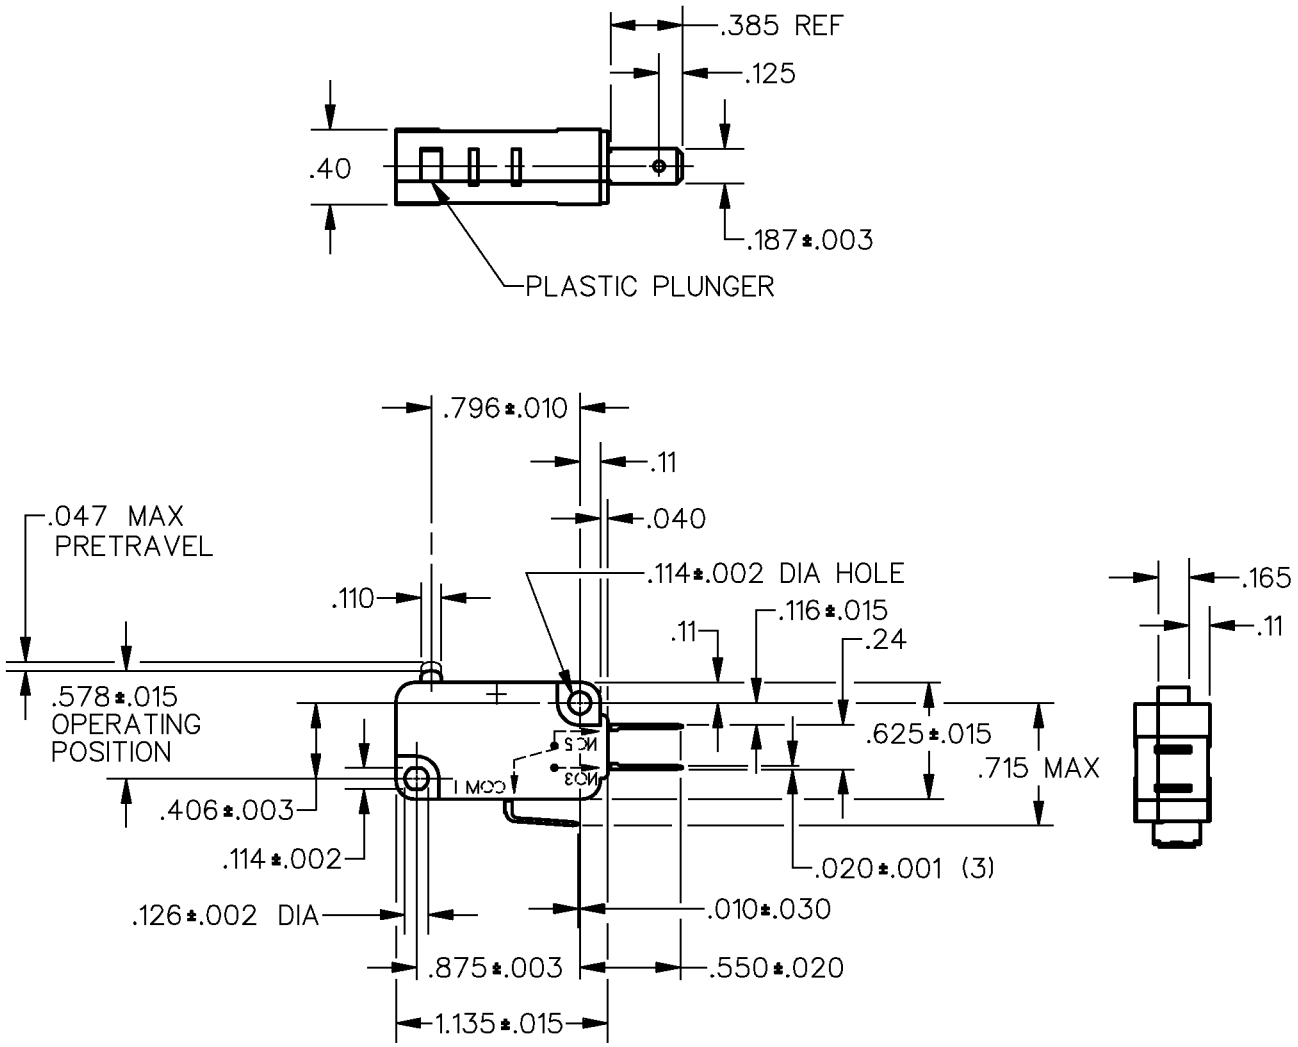

NOTES
1 – IN INSPECTION, DO NOT BURN OUT – GOLD CONTACTS
2 – IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE – – – 75 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE FORCE – – – – 10 GRAMS MIN		ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL – – – .002–.010		TWO PLACE (.00) ±.015
OVERTRAVEL – – – – – – – .050 MIN	0.1A 125 VAC	THREE PLACE (.000) ±.005
FREE POSITION – – – – – – .625 MAX	L142	ANGLES ±
RELEASE TRAVEL – – – – – – .010 MIN		WEIGHT

CATALOG LISTING V7–2S17D8
PAGE 1 OF 1
RELEASE NO. PR–17794
REPLACES
ISSUE 6

REVISIONS

A	CO–68464	BAB 26 SEP 90
B	CO–76101	KDR 04 OCT 93
C	CO 77116	DCS 4 APR 94
D	CO82776	JAF 5 APR 96
E	CO–93311	TSM 21 OCT 98

DRAWN	WJM	20 FEB 90
CHECK	DAW	23 FEB 90
CHECK		
CHECK		

FORMTEK