

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-3A17D8-201

CW-B0286

CATALOG LISTING

V7-3A17D8-201

M

ISSUE
3

REPLACES

RELEASE NO. PR-19171

CHECK

14DEC04

AK

CHECK

5 JUN 91


DCS

CHECK

J A L 31 MAY 91

REVISIONS


A	CO	76420
	DCS	29 NOV 93
B	0009899	
	KSR	14DEC04

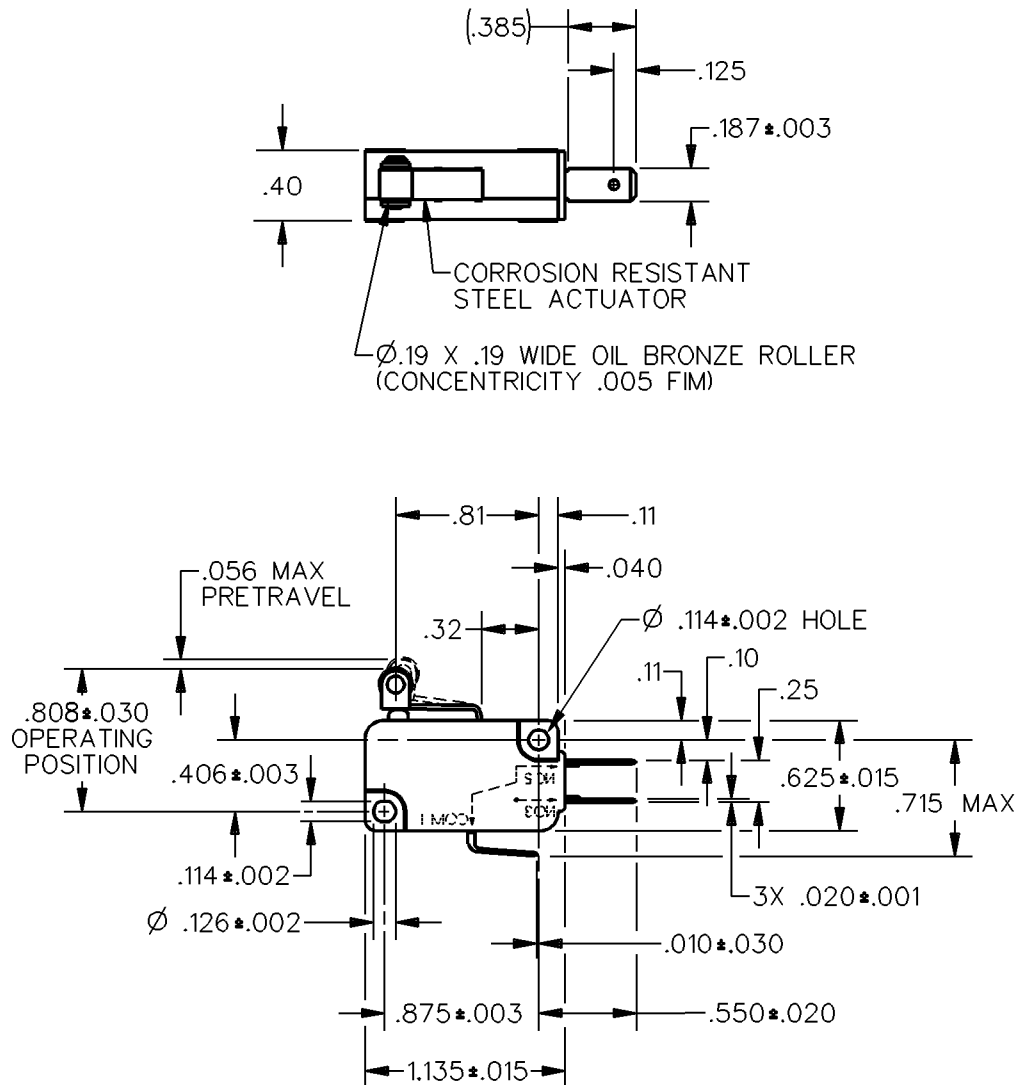

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 58 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT	
RELEASE FORCE — — — 3 GRAMS MIN	L162 5A 125, <u>250</u> , 277 VAC 1/10HP <u>250</u> VAC 		
DIFFERENTIAL TRAVEL — — — .013 MAX			
OVERTRAVEL — — — — .034 MIN			
RELEASE TRAVEL — — — — .008 MIN			



RASTER

DRAWN