

CW-B8419

FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING

V7-3E17D8

M

5
SSUE

REVISIONS

A	PR- 18798 W L S 6 NOV 90
B	CO 69746 WJC 15 MAR 91
C	CO 76104 G R T 4 OCT 93
D	ECO 0101319 DJS 06JUN13

X94131-V7

RELEASE NO. PR-18798

CHECK

HECK	
------	--

90

$$\frac{O}{O+N}$$

DAW


HECK

90

679


7 W

RASTER

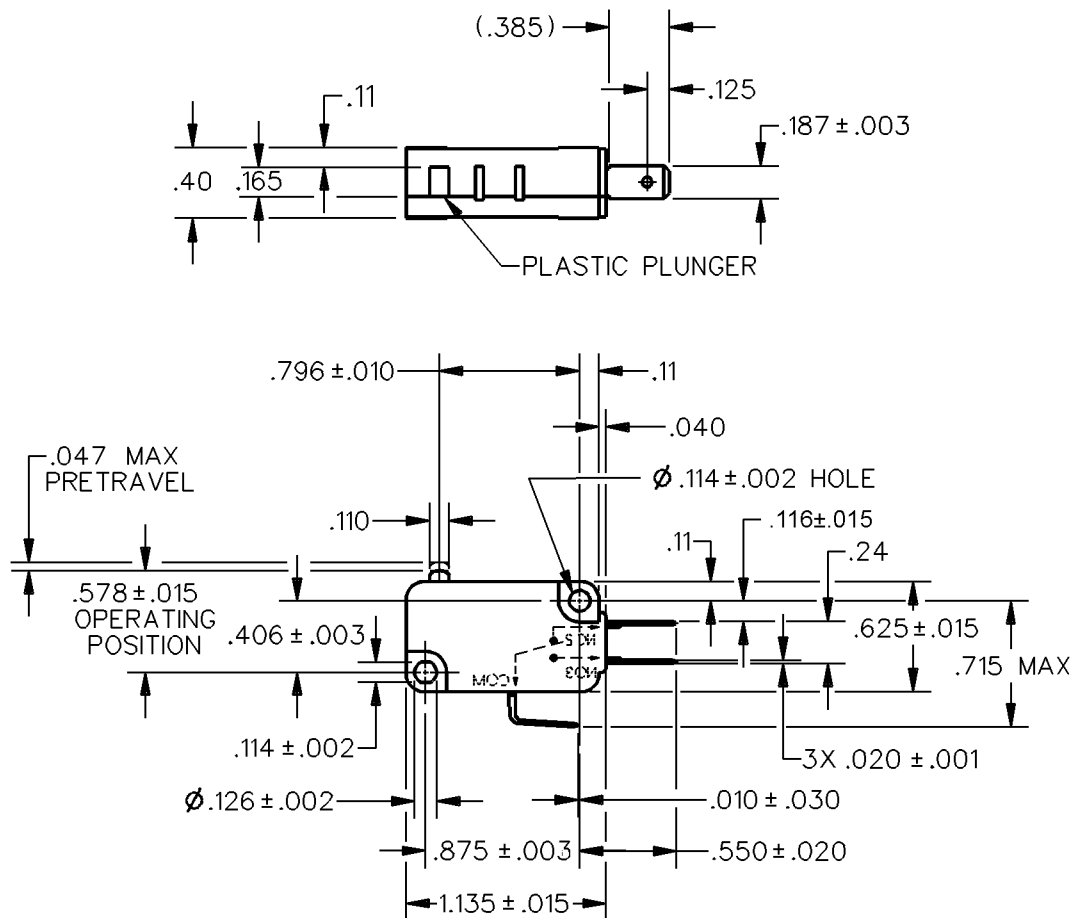

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 50 GRAMS MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 5 GRAMS MIN	S P D T		
DIFFERENTIAL TRAVEL — — — .002—.010	L216 10A 1/3HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 4A 125 VAC "L"	ONE PLACE (.01)	±.030
OVERTRAVEL — — — — — .050 MIN		TWO PLACE (.00)	±.015
FREE POSITION — — — — — .625 MAX		THREE PLACE (.000)	±.005
RELEASE TRAVEL — — — — — .010 MIN		ANGLES	±
 		WEIGHT	