

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-3E17E9-022

CW-B8416

CATALOG LISTING
V7-3E17E9-022

REPLACES

RELEASE NO. PR-19388

CATALOG LISTING

M

ISSUE
4

CHECK

REVISIONS

A	CO-74476
	DCS
	28 APR 93
B	CO-75471
	JAL
	6 OCT 93

CHECK



16 JUL 91

CHECK

16 JUL 91

JAL


DDM/CAD
DRAWN

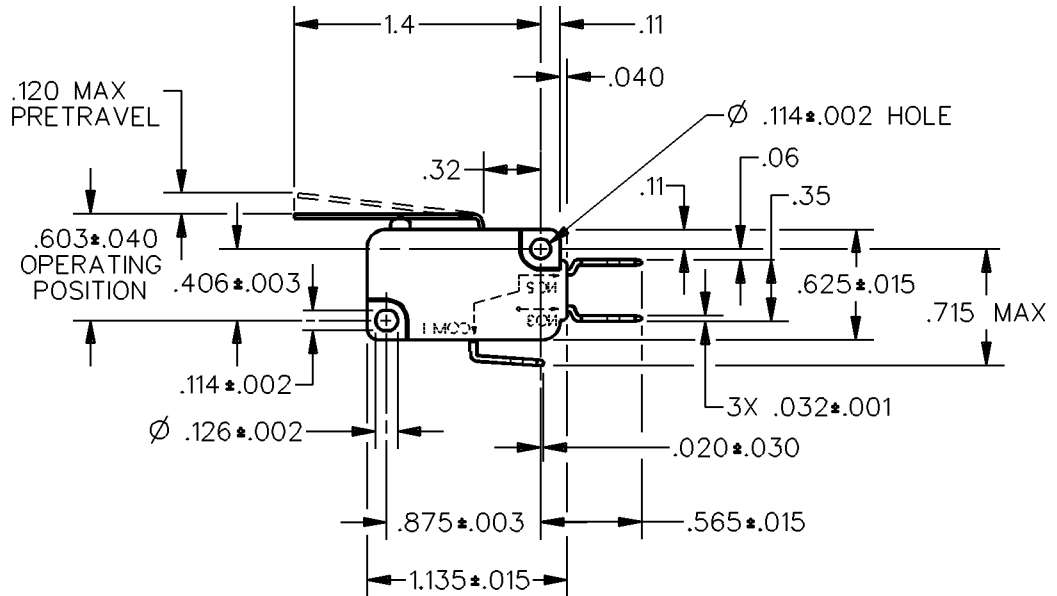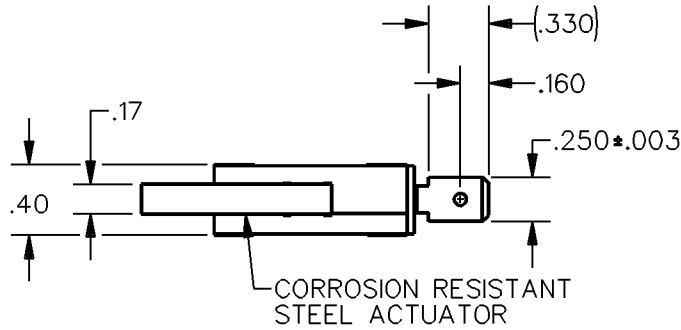

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
		CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
OPERATING FORCE — — — 30 GRAMS MAX		L216 10A 1/3HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 4A 125 VAC "L"	ONE PLACE (.0) ± .030		
RELEASE FORCE — — — 1 GRAM MIN			TWO PLACE (.00) ± .015		
DIFFERENTIAL TRAVEL — — — .030 MAX			THREE PLACE (.000) ± .005		
OVERTRAVEL — — — .065 MIN			ANGLES ±		
RELEASE TRAVEL — — — .017 MIN			WEIGHT		
					

