

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-3E27E9

CW-B8520

CATALOG LISTING

V7-3E27E9

REPLACES

RELEASE NO. PR-18781

M

ISSUE
2

CHECK

REVISIONS

A	CO-76104
GRT	
4 OCT 93	

CHECK

2 NOV 90



JAP

CHECK

1 NOV 90


BAB

DDM/CAD
DRAWN

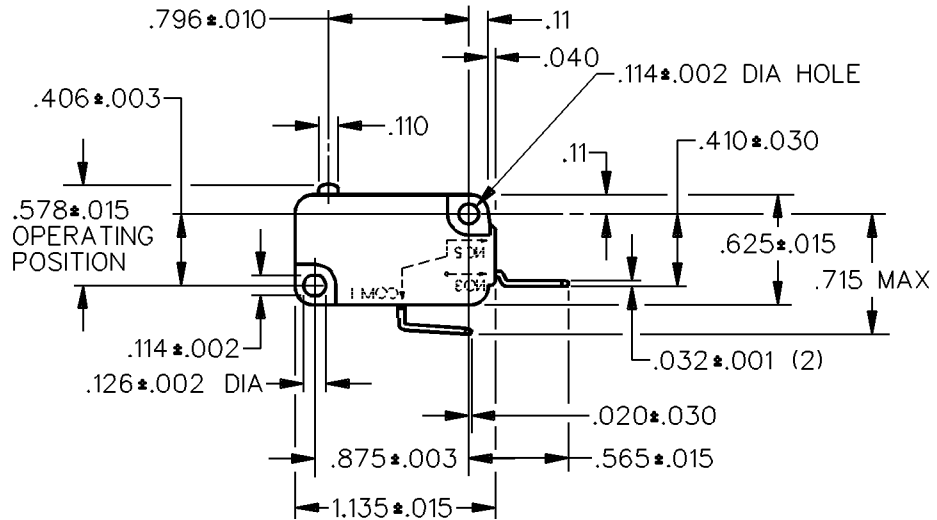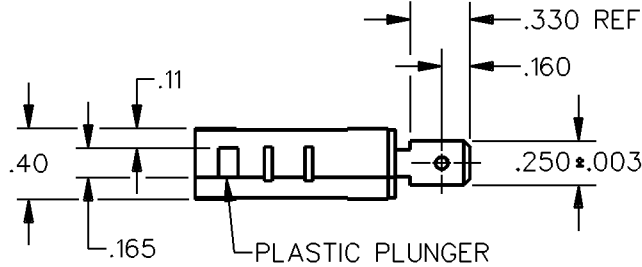

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 50 GRAMS MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE — — — 5 GRAMS MIN	S P N O			
DIFFERENTIAL TRAVEL — — — .002-.010	10A 1/3HP 125, 250, 277 VAC L216 1/2A 125 VDC 1/4A 250 VDC; 4A 125 VAC "L"	ONE PLACE (.0)	± .030	
OVERTRAVEL — — — .050 MIN		TWO PLACE (.00)	± .015	
RELEASE TRAVEL — — — .010 MIN		THREE PLACE (.000)	± .005	
		ANGLES	±	
		WEIGHT		

