

CATALOG LISTING
V7-3S17D8-000-3

CATALOG LISTING

6	ISSUE	M
---	-------	---

X93149-V7

RELEASE NO. PR-20149

CHECK

CHECK	
-------	--

20 AUG 5

WJ


CHECK	
-------	--

JWB 18 AUG

FORMTEK

REVISIONS

A	CO- 76101
K D R	04 OCT 93
B	CO 77796
DCS	9 MAR 94
C	CO 77116
DCS	19 MAY 94
D	CO82776
J A F	5 APR 96
E	CO- 93311
TSM	23 OCT 98

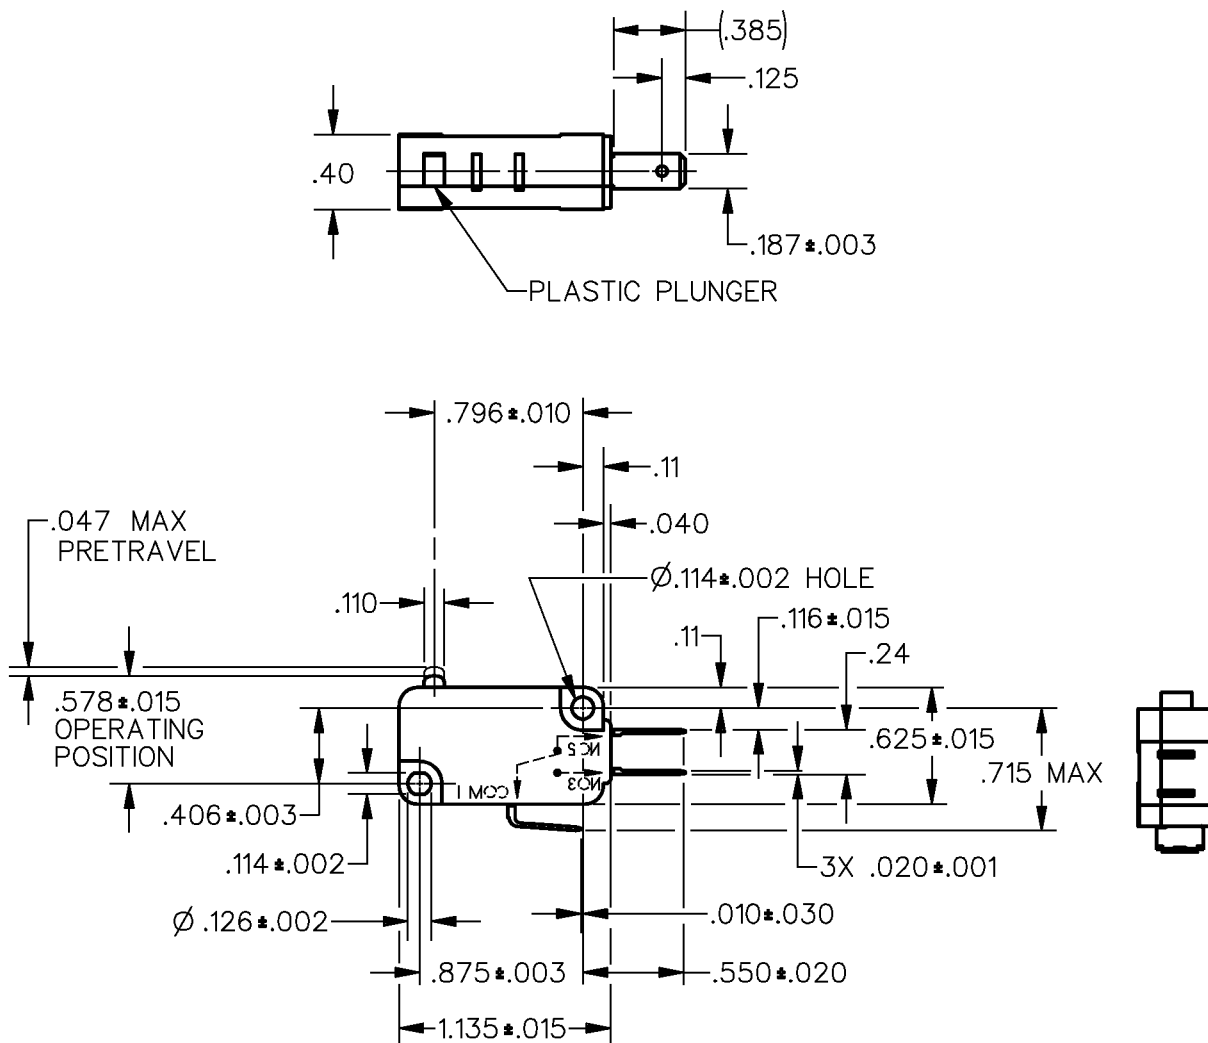


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE— — — 50 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 5 GRAMS MIN	0.1A 125 VAC L142  	ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL — — — .001—.006		TWO PLACE (.00)	±.015
OVERTRAVEL— — — — — — .050 MIN		THREE PLACE (.000)	±.005
FREE POSITION— — — — — — .625 MAX		ANGLES	±
RELEASE TRAVEL — — — — — — .010 MIN		WEIGHT	