

CATALOG LISTING
V7-3S17D8-048
PAGE 1 OF 1

REPLACES

RELEASE NO. PR-19178

M

ISSUE
5

CHECK

REVISIONS

A	CO-76305	J A L	18 NOV 93
B	CO-77116	DCS	5 APR 94
C	CO-82776	J A F	5 APR 96
D	CO-93311	TSM	23 OCT 98

CHECK

20 MAY 91

J C

W J C



CHECK

14 MAY 91

J A L

DRAWN

FORMTEK

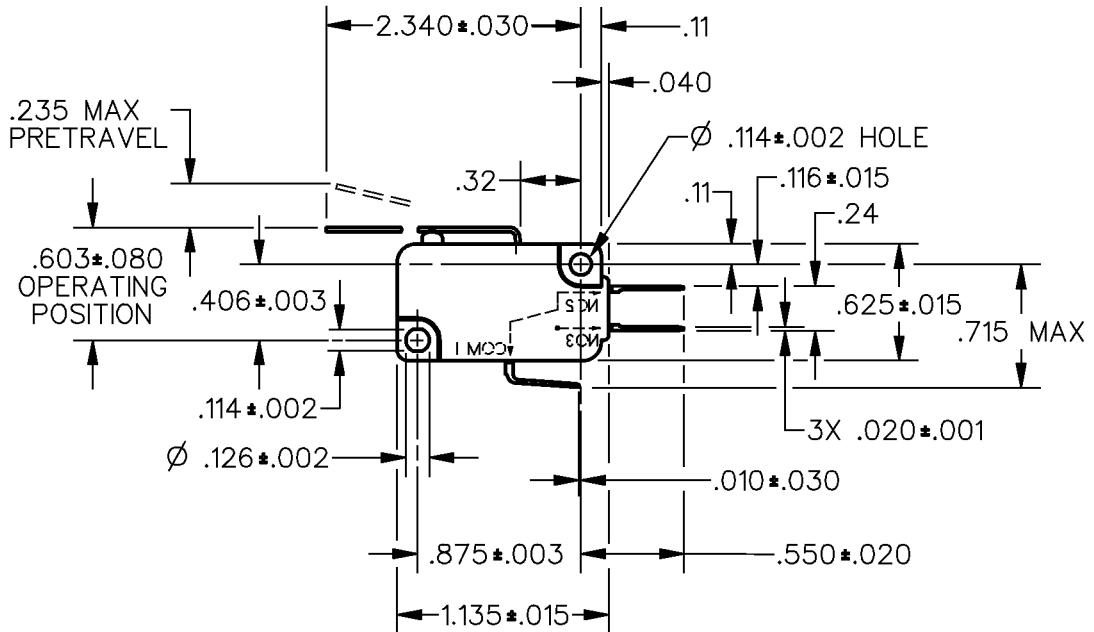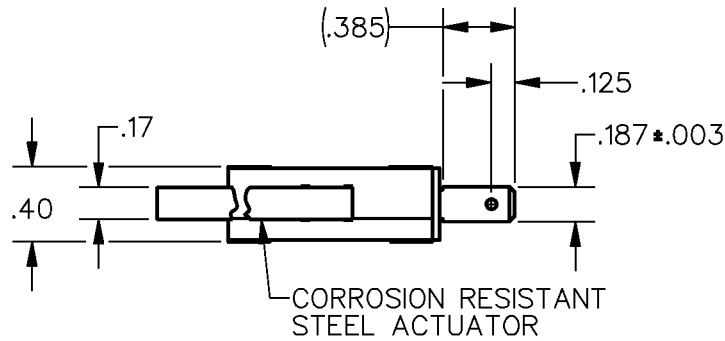


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 16 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT	
RELEASE FORCE — — — 1/2 GRAM MIN	L142 0.1A 125 VAC 		
DIFFERENTIAL TRAVEL — — — .050 MAX			
OVERTRAVEL — — — — — .118 MIN			
RELEASE TRAVEL — — — — —.030 MIN			

