

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-3S17D8

CW-B8603

CATALOG LISTING
V7-3S17D8

ISSUE
M
6

REVISIONS

A	CO-68464	BAB	26 SEP 90
B	CO-78101	K D R	04 OCT 93
C	CO-77116	DCS	5 APR 94
D	CO-82776	J A F	5 APR 96
E	CO-93311	TSM	21 OCT 98

REPLACES

RELEASE NO. PR-17794

CHECK

CHECK

23 FEB 90

DAW



CHECK

20 FEB 90

WJM

DRAWN

FORMTEK

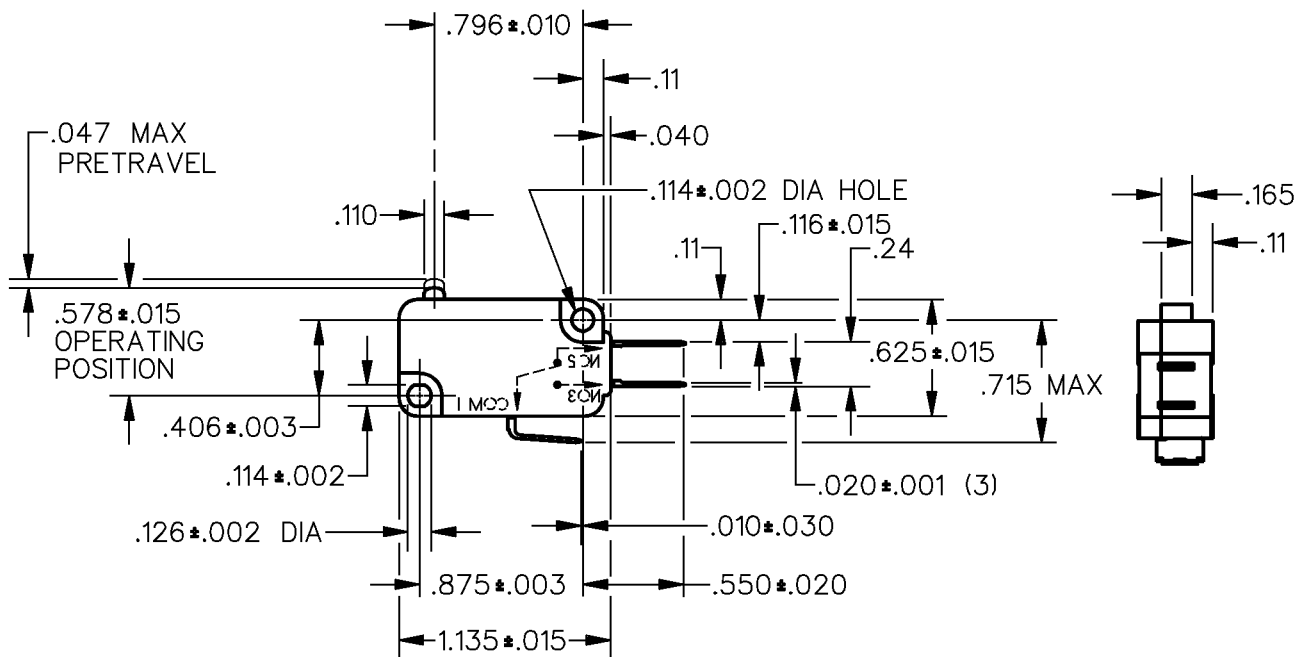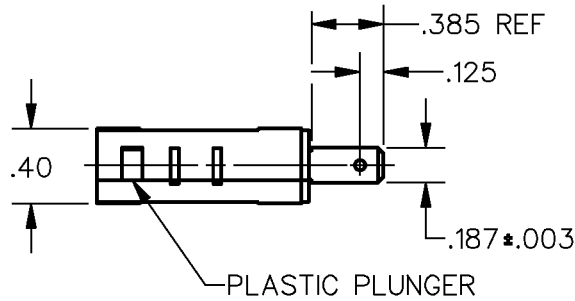


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE— — — 50 GRAMS MAX	CONTACT ARRANGEMENT S P D T 0.1A 125 VAC L142 	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 5 GRAMS MIN		ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL — — — .002—.010		TWO PLACE (.00)	±.015
OVERTRAVEL— — — — — .050 MIN		THREE PLACE (.000)	±.005
FREE POSITION— — — — — .625 MAX		ANGLES	±
RELEASE TRAVEL — — — — — .010 MIN		WEIGHT	