

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-3S17E9-022

CW-B8806

CATALOG LISTING

V7-3S17E9-022
PAGE 1 OF 1

REPLACES

RELEASE NO. PR-19435

M

ISSUE
5

CHECK

REVISIONS

A	REL PR-19435
	BAB
	12 AUG 91
B	CO-76305
	JAL
	19 NOV 93
C	CO-77116
	DCS
	5 APR 94
D	CO-93311
	TSM
	26 OCT 98

CHECK

13 AUG 91

JAL



CHECK

12 AUG 91

BAB

FORMTEK

DRAWN

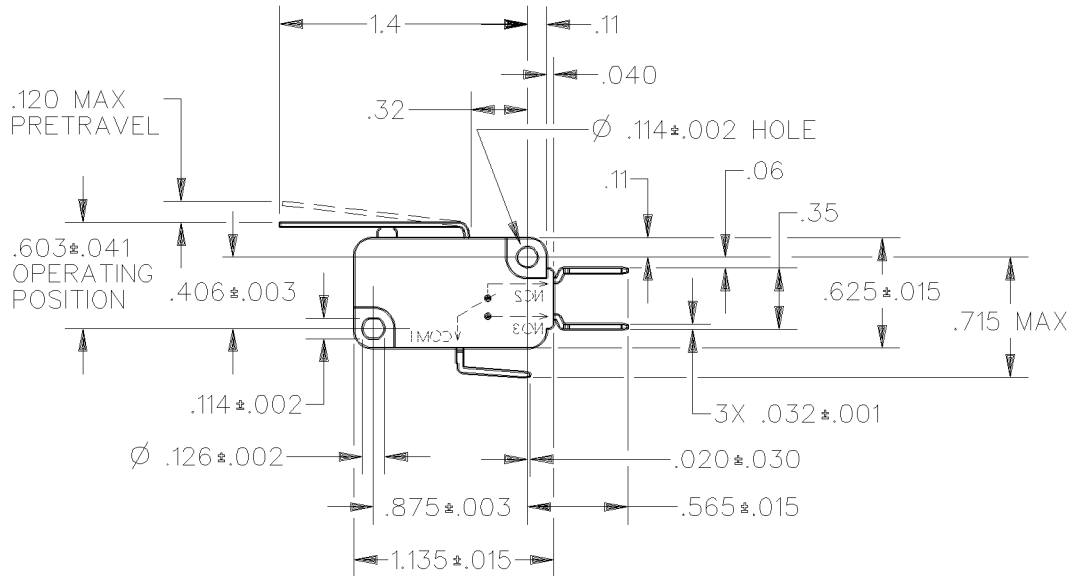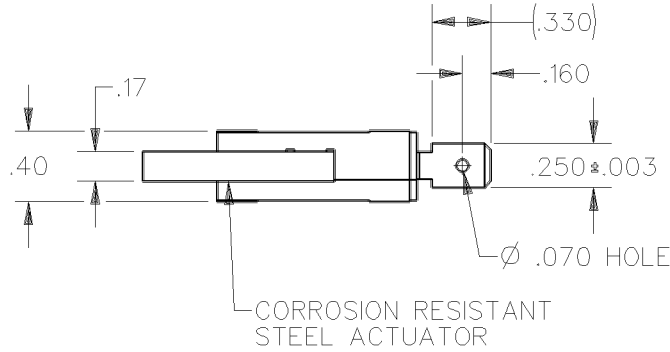


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE— — —28 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .015 THREE PLACE (.000) ± .005 ANGLES ± WEIGHT	
RELEASE FORCE— — — —1 GRAM MIN	L142 0.1A 125 VAC 		
DIFFERENTIAL TRAVEL— — —.027 MAX			
OVERTRAVEL— — — — —.067 MIN			
RELEASE TRAVEL — — — — —.017 MIN			