MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH–BASIC

CATALOG LISTING
V7–4A17D8
CW–C4010

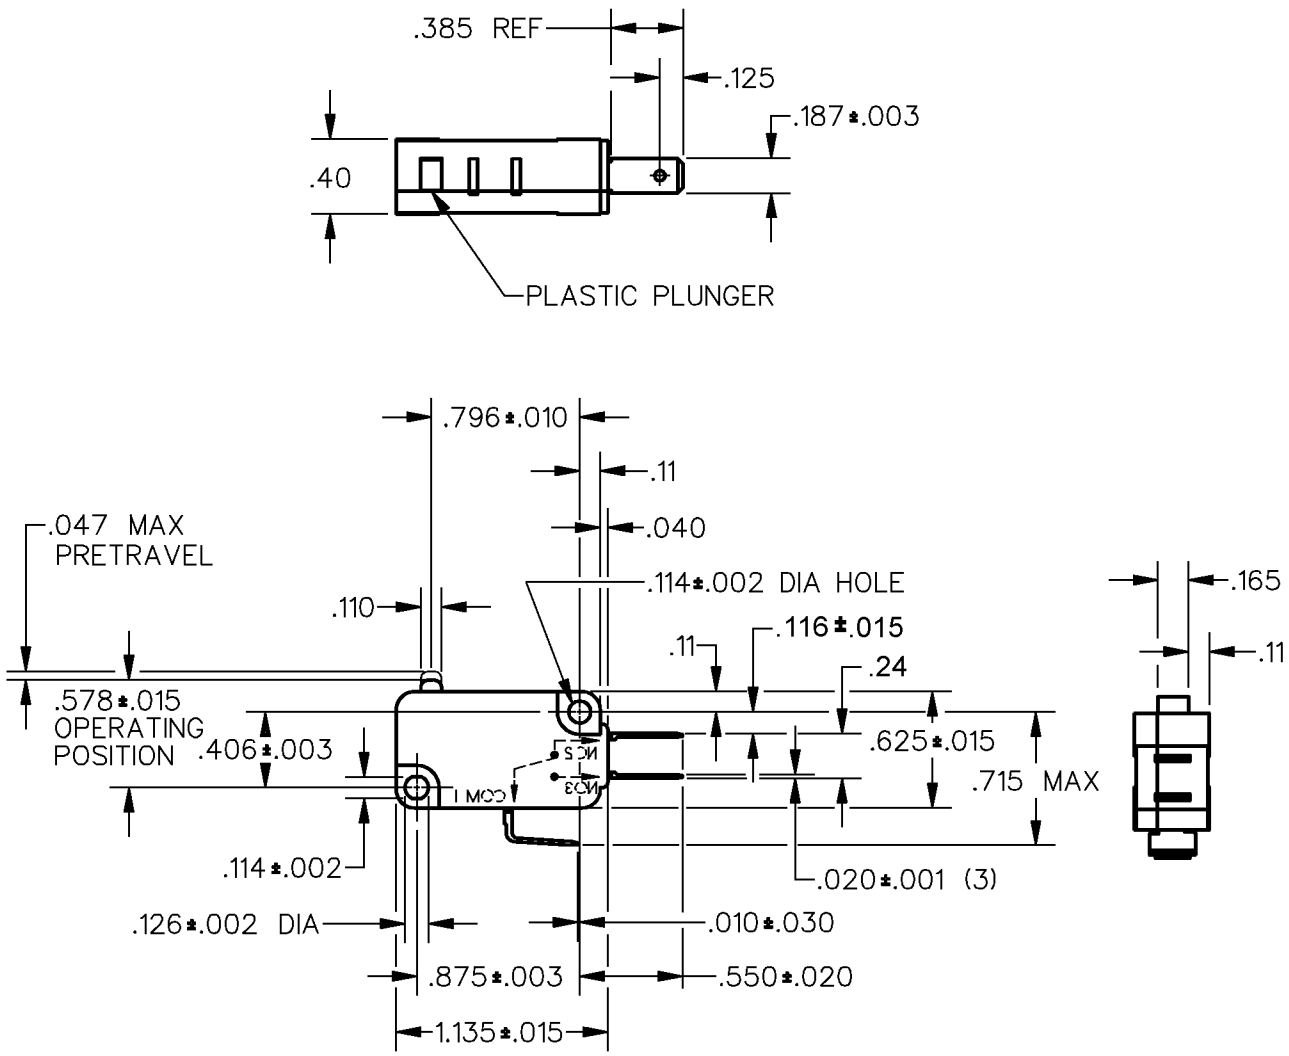

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE NONE — DO NOT SCALE PRINT
OPERATING FORCE — — 25 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE TRAVEL — — — — — .010 MIN	L162 5A 125, 250, 277 VAC 1/10 HP 250 VAC	ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — .002–.010		TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — — — .050 MIN		THREE PLACE (.000) ±.005
FREE POSITION — — — — — .625 MAX		ANGLES ±
		WEIGHT

REPLACES X91517–V7
RELEASE NO. PR–17596
CATALOG LISTING V7–4A17D8
ISSUE 4

REVISIONS			
A	CO 70247	J A L 20 JUN 91	30JAN12
B	CO–76108	LJF 25 OCT 93	
C	0085964	SBH 30JAN12	CMH

CHECK 30JAN12
CHECK CMH
14 AUG 89
CHECK DCS
CHECK 10 AUG 89
DRAWN WJM 10 AUG 89
RASTER