FO-50360-L

CW-C4021

REV	DOCUMENT	CHANGED BY	CHECK
3	205047	TSM 07MAR02	SAV

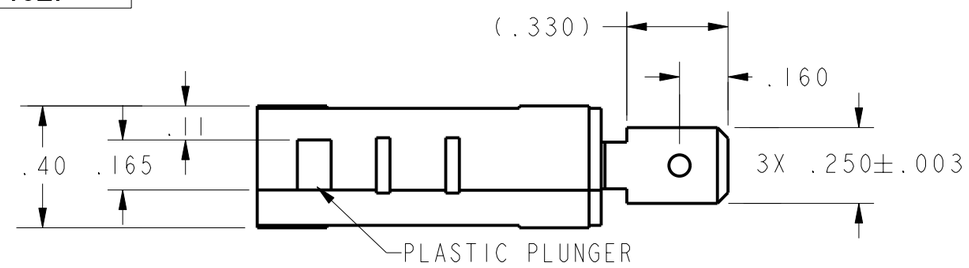

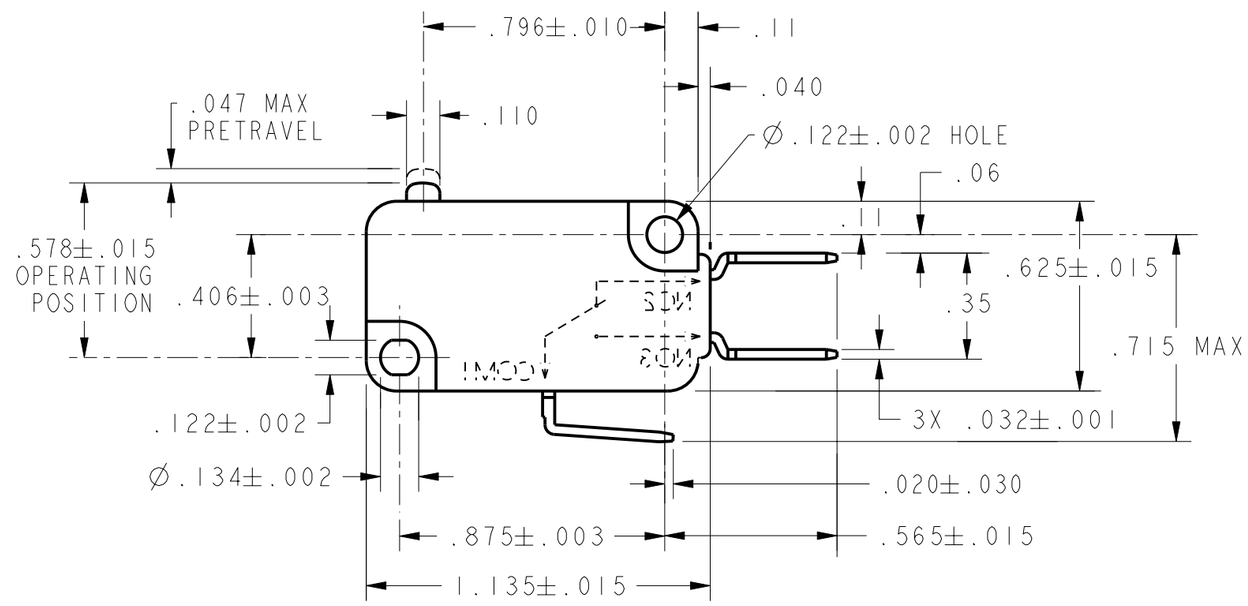

CHARACTERISTICS	
OPERATING FORCE	17 GRAMS MAX
DIFFERENTIAL FORCE	4 GRAMS MAX
RELEASE TRAVEL	.010 MIN
DIFFERENTIAL TRAVEL	.006 MAX
OVERTRAVEL	.050 MIN
FREE POSITION	.625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L162
5A 125, 250, 277 VAC
1/10HP 250 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0.4
TWO PLACE	.XX	±.015	±0.15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	TSM	07MAR02
CHECK	SAV	07MAR02

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B		V7-4A18E9	3

SCALE 2:1 | WEIGHT | SHEET 1 OF 1