FO-50360-L

CW-B0036

REV	DOCUMENT	CHANGED BY	CHECK
1	204941	TSM 22FEB02	SAV
2	207665	TSM 14MAR03	SAV
3	0005782	RJ 04JUN04	AK

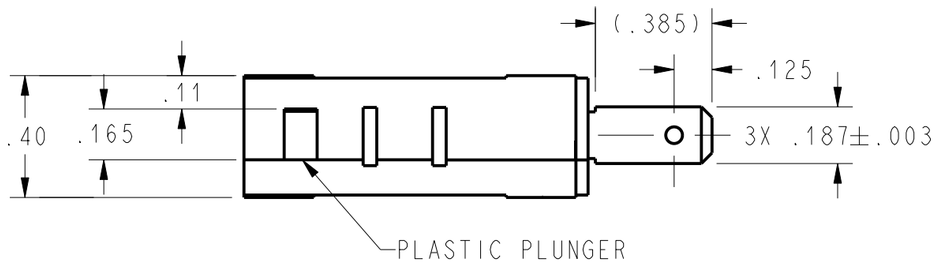

NOTES
1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
3 - RESTRICTED LISTING
4 - INSPECT SWITCH RESISTANCE PER CONTROL PLAN

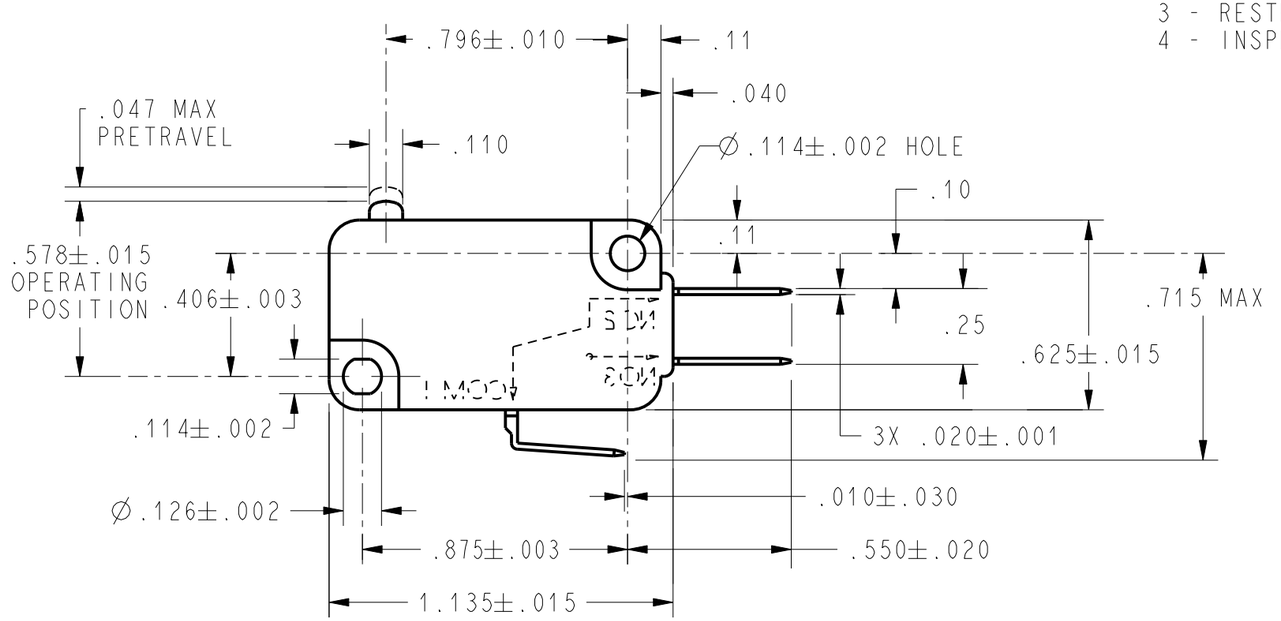

CHARACTERISTICS	
OPERATING FORCE	22 GRAMS MAX
RELEASE FORCE	10-17 GRAMS
DIFFERENTIAL FORCE	2 GRAMS MIN
RELEASE TRAVEL	.010 MIN
DIFFERENTIAL TRAVEL	.010 MAX
OVERTRAVEL	.050 MIN
FREE POSITION	.625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L142
0.1A 125 VAC

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		± 5°	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	TSM	22FEB02
CHECK	SAV	22FEB02

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	I	V7-4S17D8-000-1	3

SCALE 2:1 | WEIGHT | SHEET 1 OF 1