

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
V7-4S17D8

CW-B8604

CATALOG LISTING
V7-4S17D8
PAGE 1 OF 1

REPLACES
PR-17794

ISSUE
6

REVISIONS

A	CO-68464	30 JAN 12
B	CO-76102	1 OCT 93
C	CO-77166	6 APR 94
D	CO-93311	21 OCT 98
E	0085964	30 JAN 12

CHECK
30 JAN 12

CMH

CHECK
21 OCT 98

SBH
30 JAN 12

DAW
23 FEB 90



CHECK
20 FEB 90

WJM

DRAWN

DAW

WJM

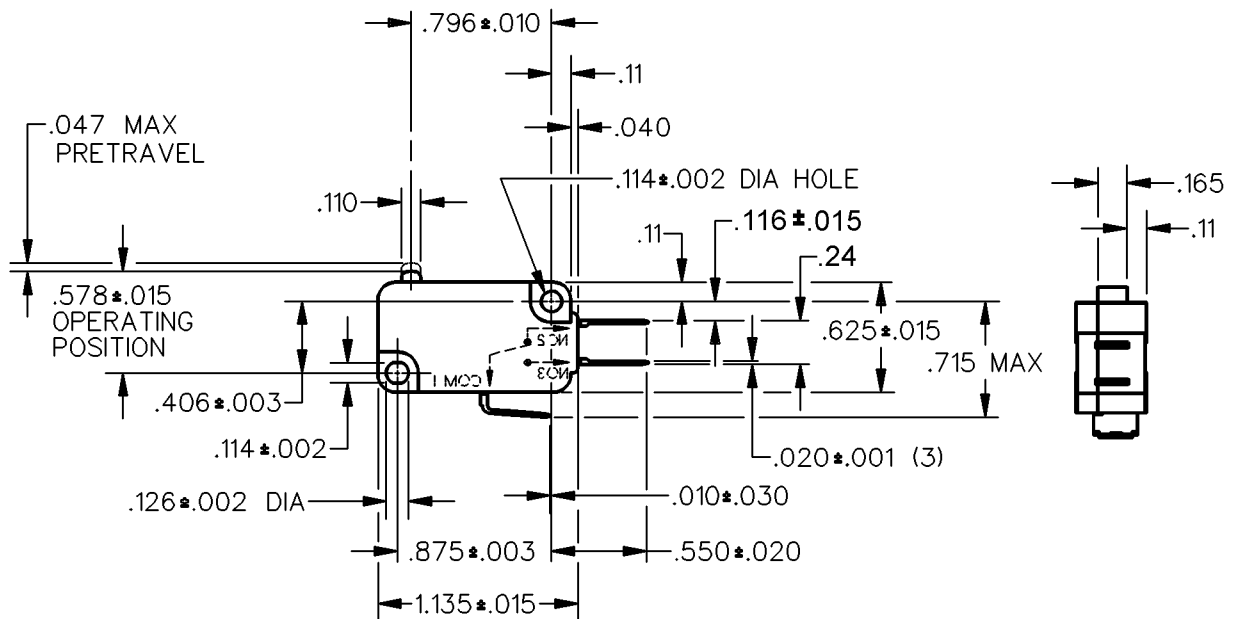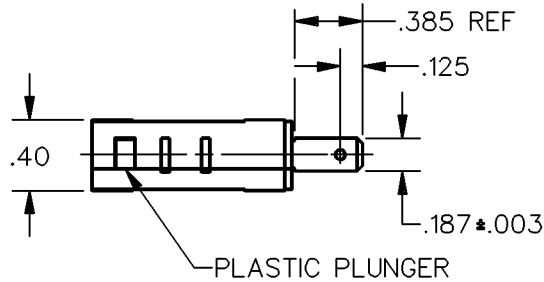


NOTES

- 1 - IN INSPECTION, DO NOT BURN OUT - GOLD CONTACTS
- 2 - IN INSPECTION, DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE -- 25 GRAMS MAX
RELEASE TRAVEL -- -- -- -- .010 MIN
DIFFERENTIAL TRAVEL -- -- .002-.010
OVERTRAVEL -- -- -- -- .050 MIN
FREE POSITION -- -- -- -- .625 MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

0.1A 125 VAC

L142



SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT

RASTER