


CW-C5978

REV	DOCUMENT	CHANGED BY	CHECK
3	0059070	KNR 23NOV09	CMH

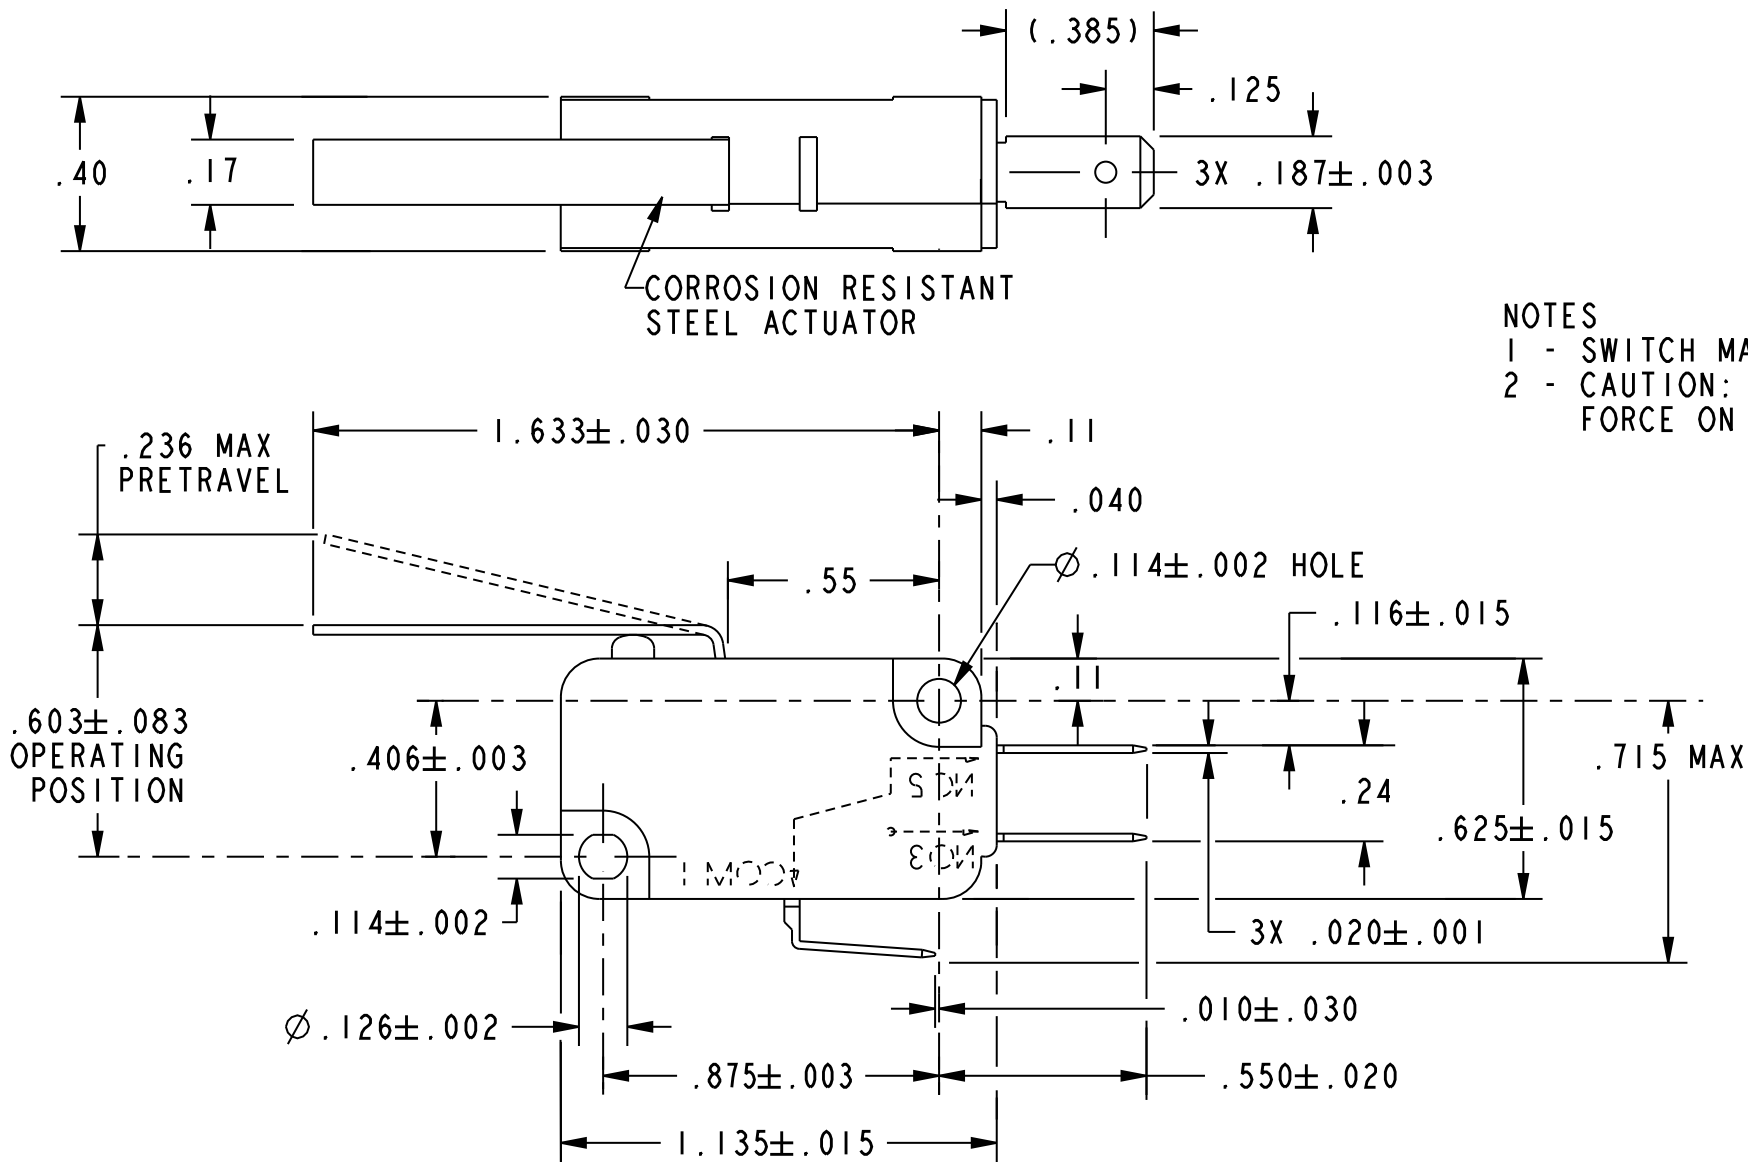

NOTES
1 - SWITCH MATERIALS WILL WITHSTAND 150°C
2 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING FIVE POUNDS

CHARACTERISTICS		ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:			DRAWN	TSM	19NOV01	Honeywell				
OPERATING FORCE-----112 GRAMS MAX		CONTACT ARRANGEMENT S P D T		US (inch) CUSTOMARY X SI (mm) METRIC NO PLACE X ±.040 ±1 ONE PLACE .X ±.030 ±0,4 TWO PLACE .XX ±.015 ±0,15 THREE PLACE .XXX ±.005 ± ANGLES ± 3° ± RAW MATERIAL-COMMERCIAL STANDARD			CHECK	SAV	24MAR03					
RELEASE FORCE ----- 20 GRAMS MIN		L156 11A 1/3HP 125, 250 OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L" T UL					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, BASIC				
DIFFERENTIAL TRAVEL ----- .085 MAX				THIRD ANGLE PROJECTION										
OVERTRAVEL ----- .083 MIN							DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED			SIZE B	DWG TYPE I	DRAWING NAME V7-6B13D8-122		REV 3
RELEASE TRAVEL ----- .022 MIN										PTC 2D	ASME Y14.5M-1994		SCALE 2 : 1	WEIGHT