

Honeywell

FED.MFG.CODE 91929

SWITCH-BASIC

CATALOG LISTING
V7-6C17D8

CW-C6018

CATALOG LISTING

V7-6C17D8

M

ISSUE
5

REPLACES

RELEASE NO. PR-19692

CHECK

REVISIONS

A	REL DWG PR19692	11JUL08
G R T	10 JAN 92	
B	CO- 76108	
LJF	20 OCT 93	
C	0041190	
PK	11JUL08	
D	0086919	
VKR	28FEB12	

ASD

CHECK

17 JAN 92



W J C

CHECK

10 JAN 92

RASTER


DRAWN

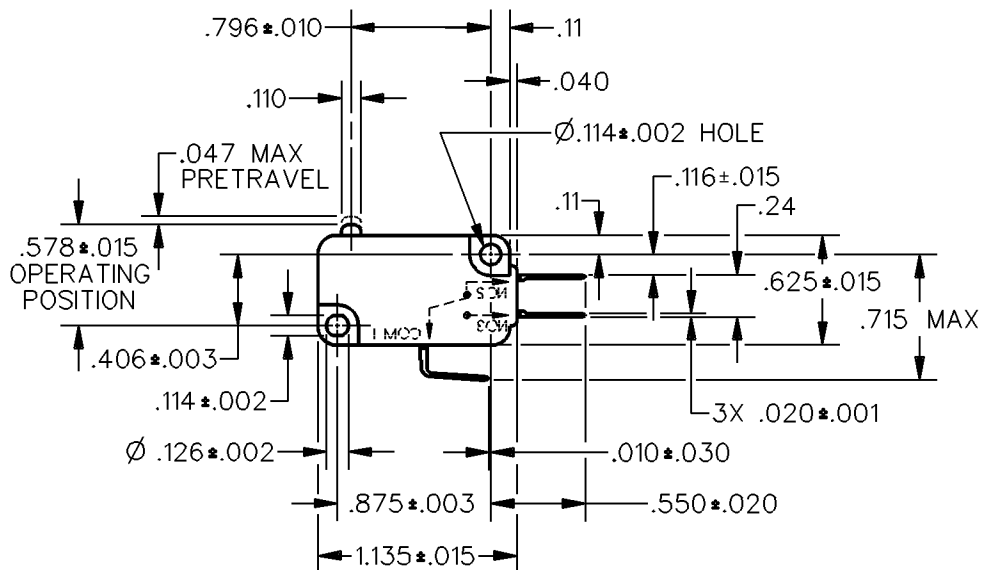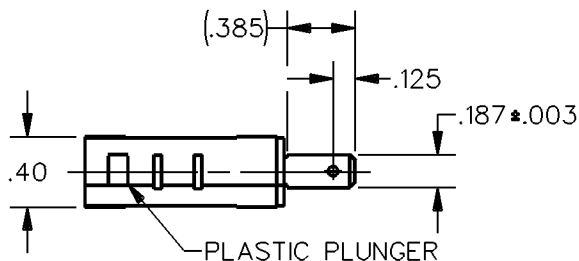

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF HONEYWELL.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	DO NOT SCALE PRINT
OPERATING FORCE — — — 6-14 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT	
RELEASE FORCE — — — — 4 OZ MIN	15.1A 1/2HP 125, 250, 277 VAC 1/2A 125 VDC; 1/4A 250 VDC 5A 125 VAC "L" L215 		
DIFFERENTIAL TRAVEL — — — .002-.010			
OVERTRAVEL — — — — .040 MIN			
FREE POSITION — — — — .625 MAX			
RELEASE TRAVEL — — — — .010 MIN			