

Honeywell

FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING

V7-6C18D8-002

CW-C6031

CATALOG LISTING
V7-6C18D8-002
PAGE 1 OF 1

ISSUE
M
4

REPLACES
RELEASE NO. PR-23334

CHECK

01JUL08

ASD

CHECK

3 FEB 98

DCS



CHECK

2 FEB 98

DCS

RASTER


DRAWN

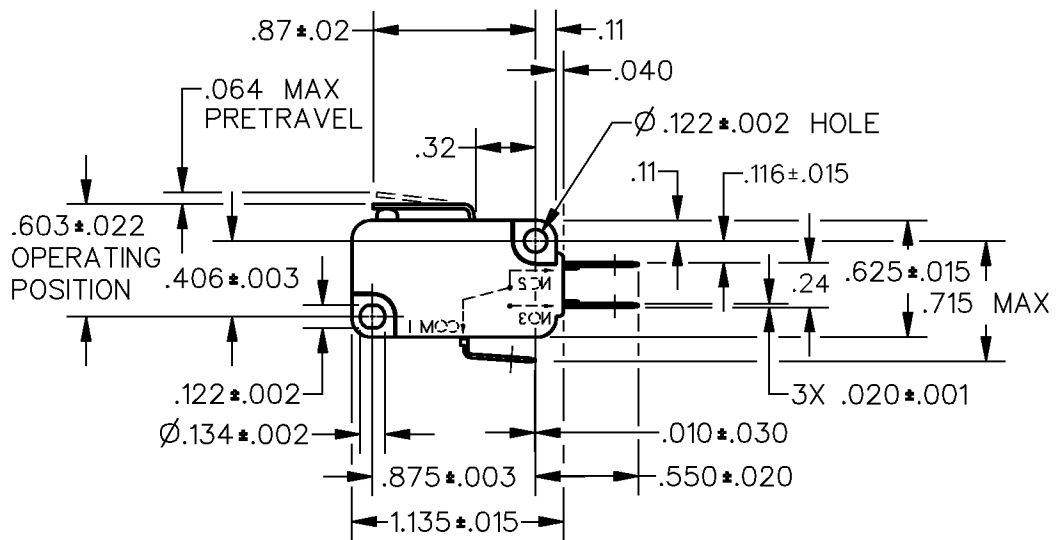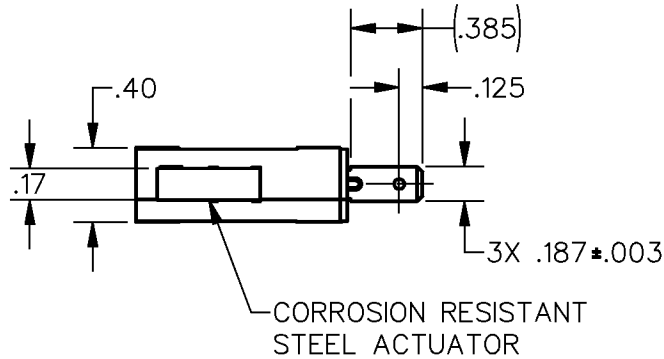

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF HONEYWELL

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — 413 GRAMS MAX
DIFFERENTIAL TRAVEL — — — .014 MAX
OVERTRAVEL — — — — — .037 MIN
RELEASE TRAVEL — — — — — .009 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L215

15.1A 1/2HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 5A 125 VAC "L"

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT

