

Honeywell

FED.MFG.CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-6C18D8-048

CW-C6032

CATALOG LISTING
V7-6C18D8-048
PAGE 1 OF 1ISSUE
M
2

REVISIONS

A 0041196
JA
01JUL08

REPLACES

PR-22583

RELEASE NO.

CHECK

CHECK

01JUL08

ASD


CHECK

16 JAN 97

DCS

RASTER


DRAWN

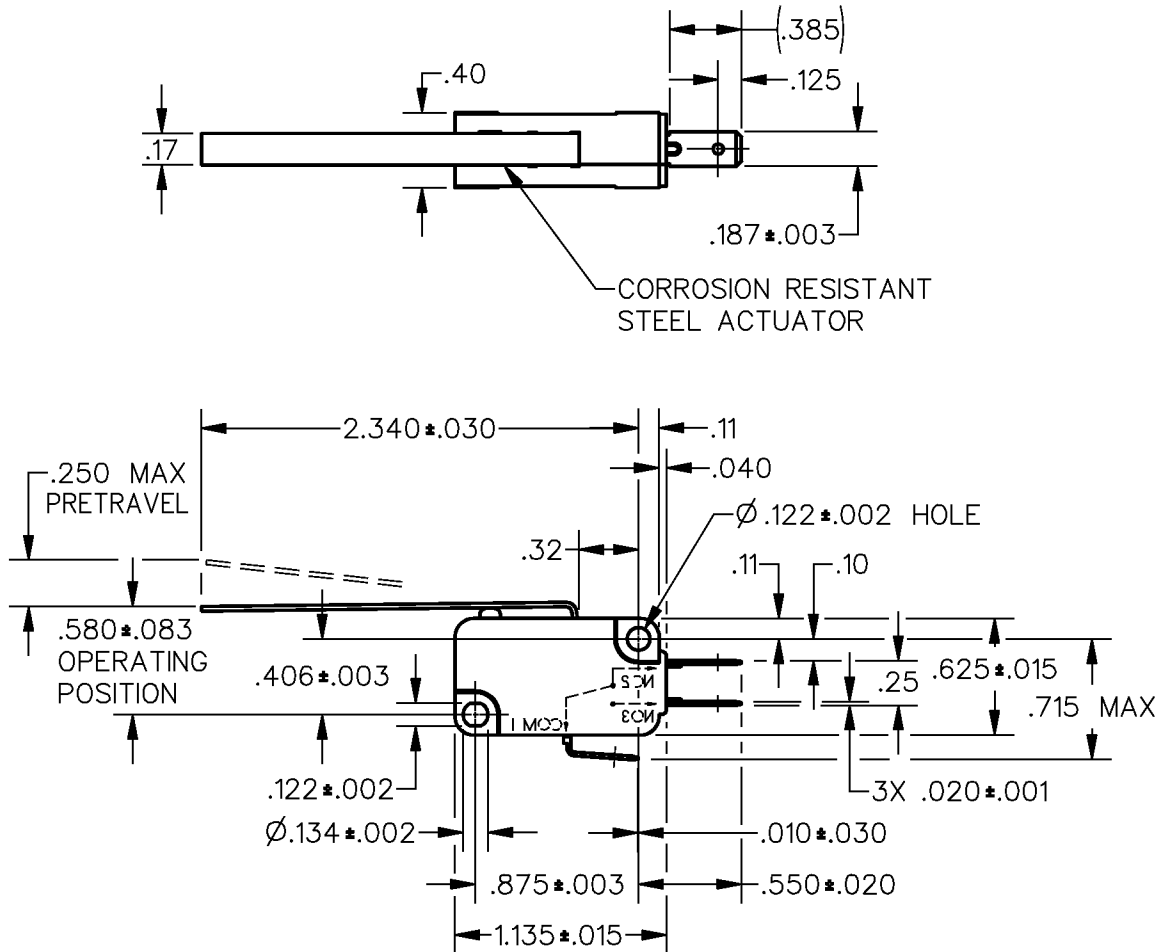

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF HONEYWELL.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — 5 OZ MAX
DIFFERENTIAL TRAVEL — — — .086 MAX
OVERTRAVEL — — — — — .092 MIN
RELEASE TRAVEL — — — — — .021 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L215

15.1A 1/2HP 125, 250 OR 277 VAC
1/2A 125 VDC
1/4A 250 VDC; 5A 125 VAC "L"

SCALE FULL

DO NOT
SCALE PRINTUNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT

