FO-50360-L

CW-C6033

REPLACES: X115131-V7

REV	DOCUMENT	CHANGED BY	CHECK
B	0041196	JA 01JUL08	ASD

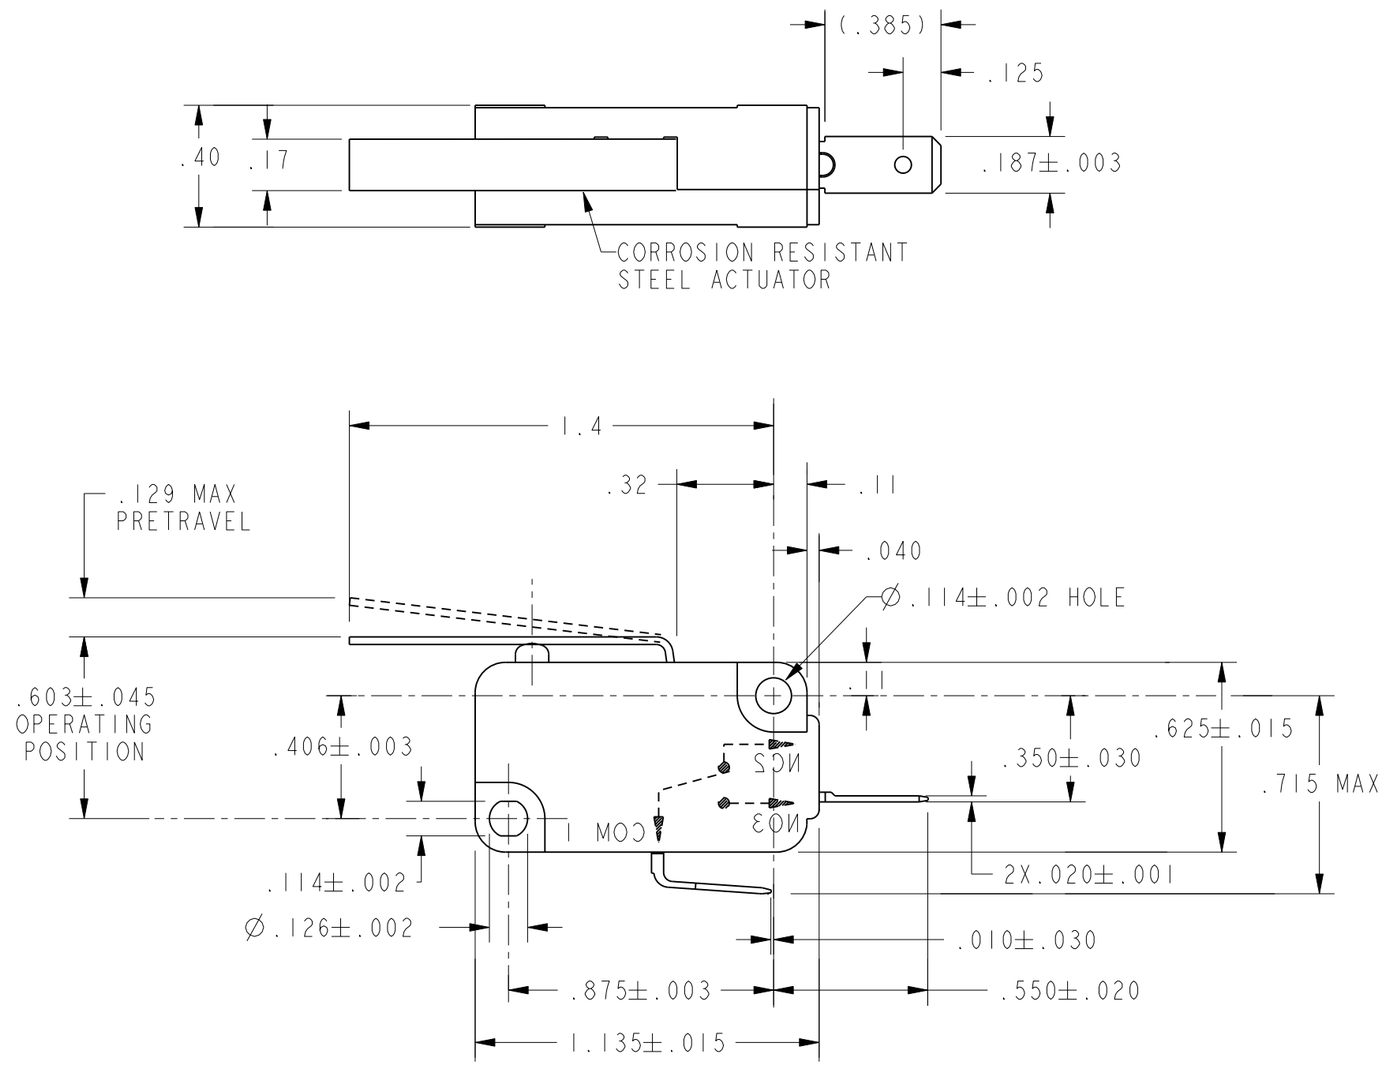

CHARACTERISTICS	
OPERATING FORCE	215 GRAMS MAX
RELEASE FORCE	38 GRAMS MIN
DIFFERENTIAL TRAVEL	.028 MAX
OVERTRAVEL	.053 MIN
RELEASE TRAVEL	.017 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

L215

15.1A 1/2HP 125, 250 OR 277 VAC
1/2 125VDC
1/4A 250 VDC; 5A 125 VAC "L"

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: [X] US(inch) CUSTOMARY [ ] SI(mm) METRIC

NO PLACE	X	±.040	±1
ONE PLACE	.X	±.030	±0,4
TWO PLACE	.XX	±.015	±0,15
THREE PLACE	.XXX	±.005	±
ANGLES		±	±

RAW MATERIAL-COMMERCIAL STANDARD

THIRD ANGLE PROJECTION

DRAWN	WJC	26AUG03
CHECK	SAV	26AUG03

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

PTC 2D | ASME Y14.5M-1994

Honeywell

TITLE
SWITCH, BASIC

SIZE	DWG TYPE	DRAWING NAME	REV
B	1	V7-6C27D8-022	B

SCALE 2:1 | WEIGHT | SHEET 1 OF 1