


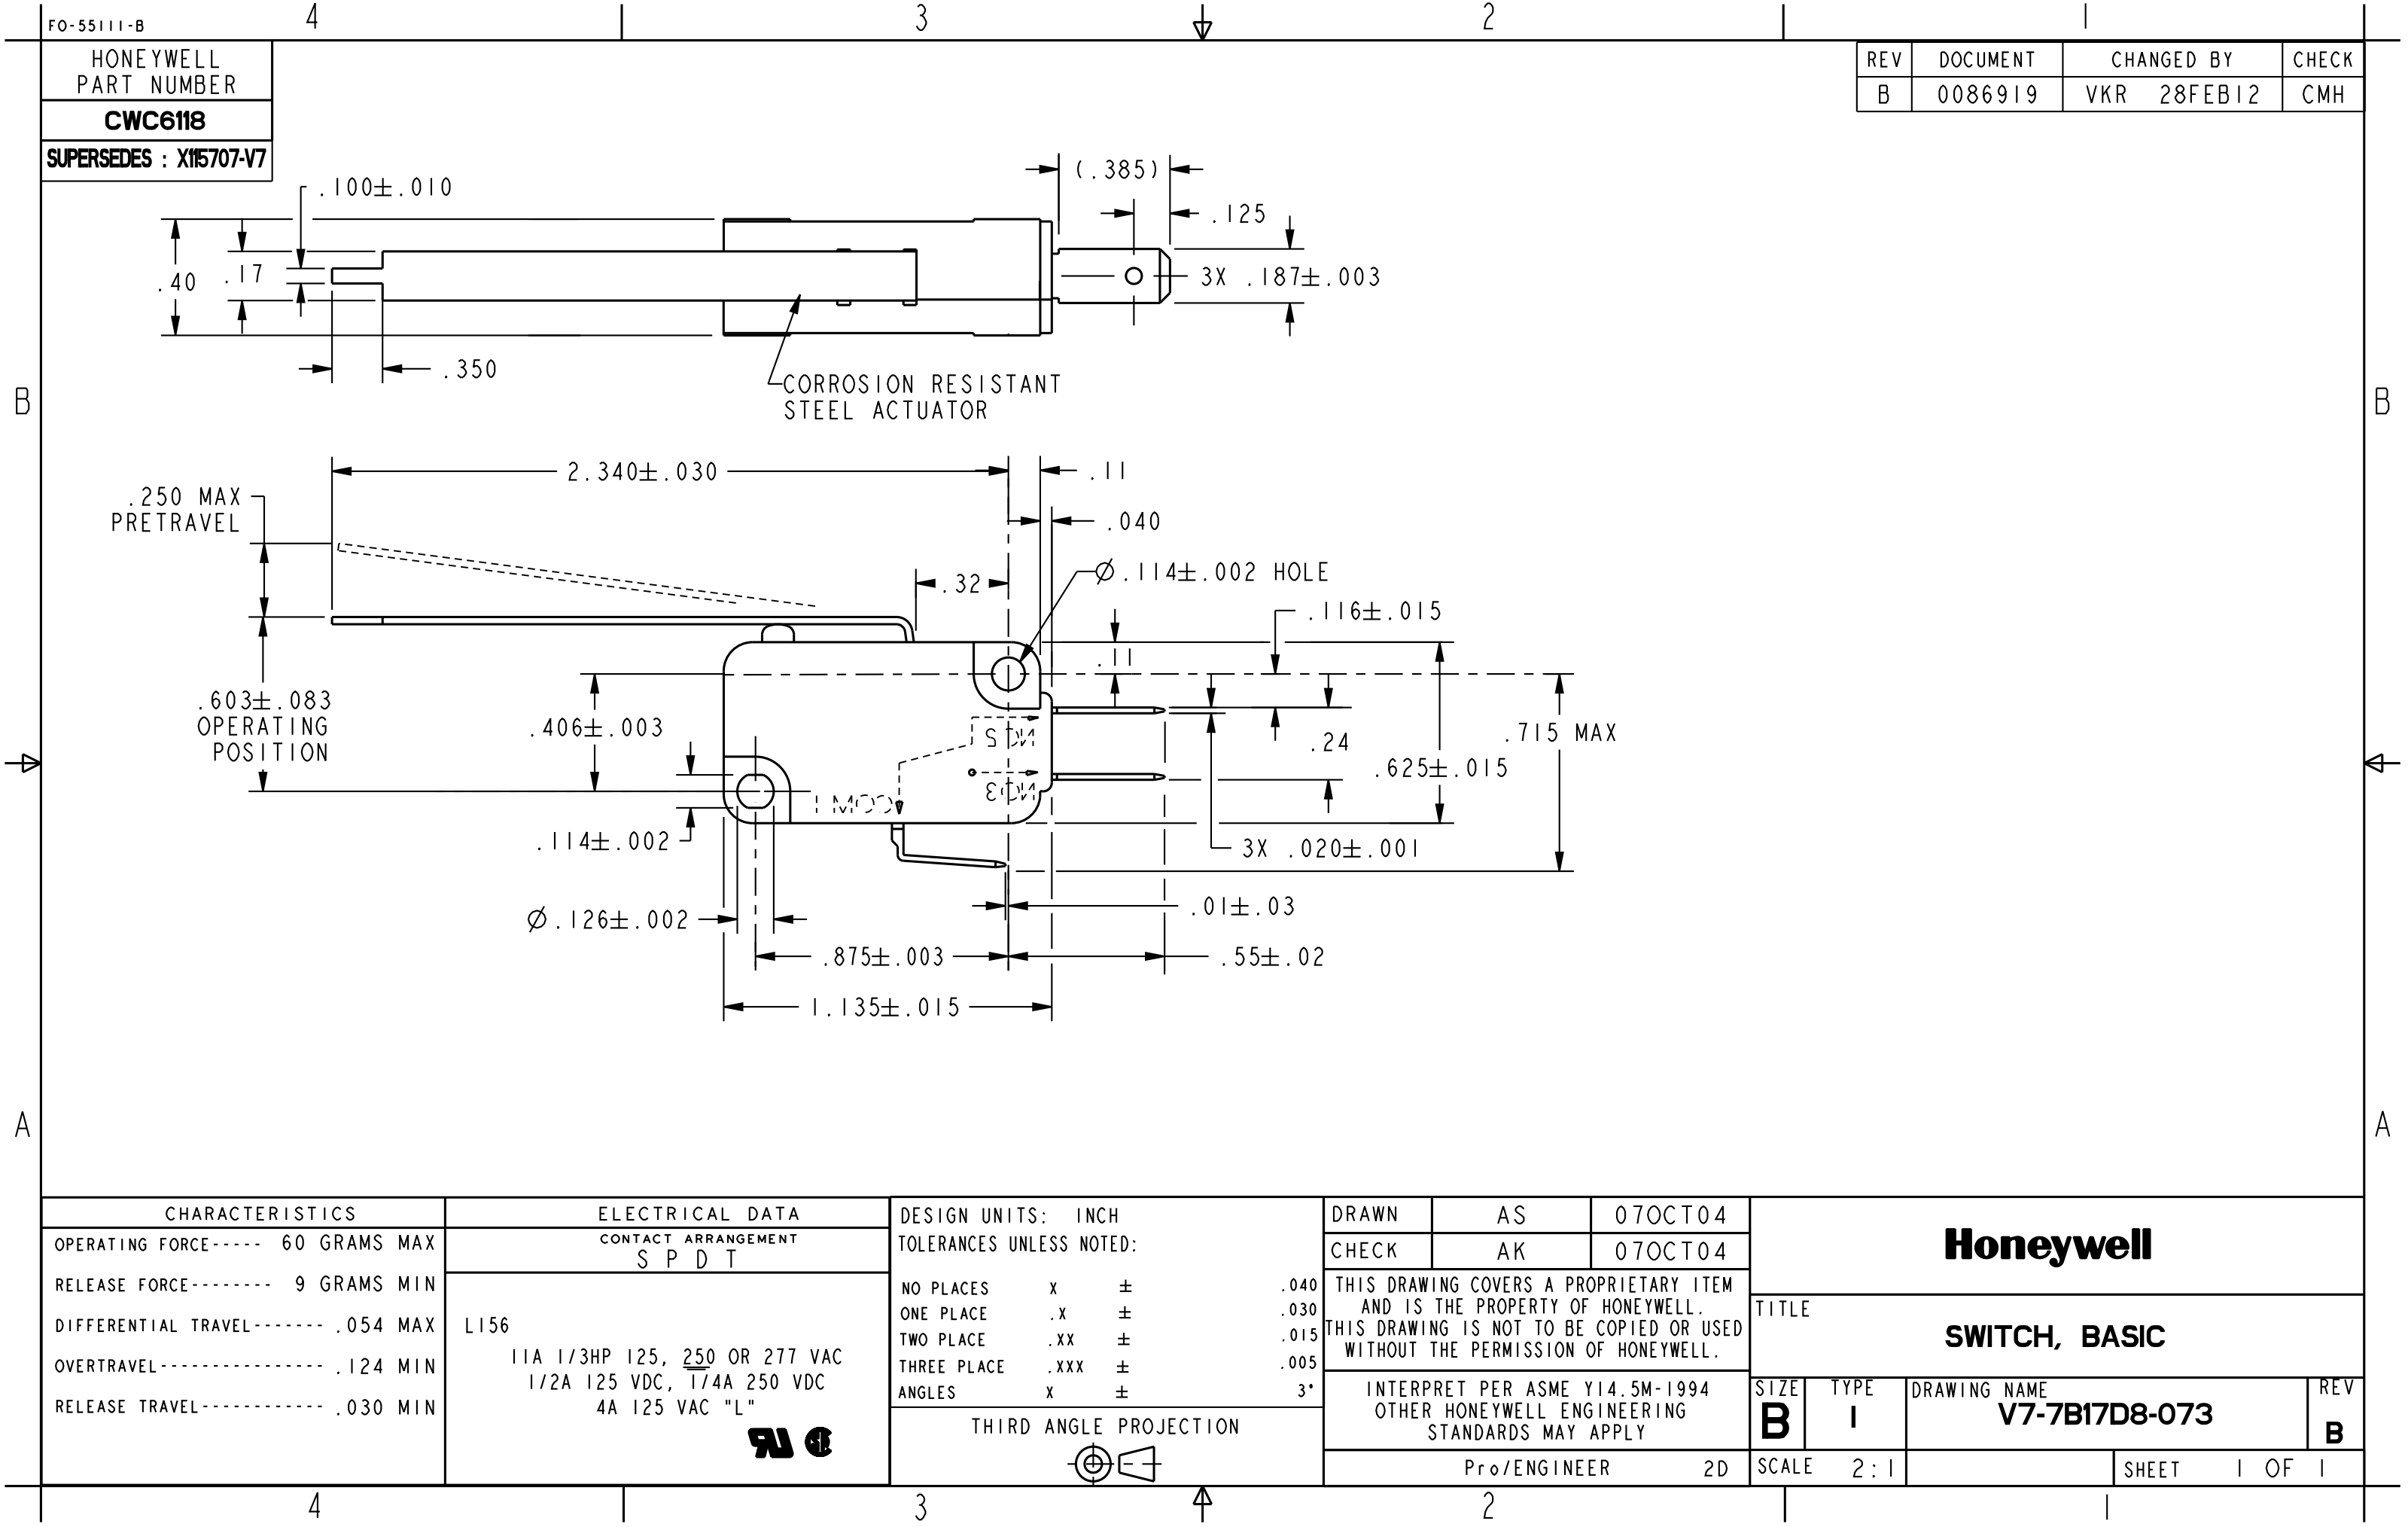


FO-551111-B

HONEYWELL
PART NUMBER

CWC6118

SUPERSEDES : X115707-V7

REV	DOCUMENT	CHANGED BY	CHECK
B	0086919	VKR 28FEB12	CMH

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN	AS	07OCT04	Honeywell				
OPERATING FORCE----- 60 GRAMS MAX		CONTACT ARRANGEMENT S P D T		TOLERANCES UNLESS NOTED:		CHECK	AK	07OCT04					
RELEASE FORCE----- 9 GRAMS MIN		L156 11A 1/3HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L" 		NO PLACES X ± .040		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH, BASIC				
DIFFERENTIAL TRAVEL----- .054 MAX				ONE PLACE .X ± .030									
OVERTRAVEL----- .124 MIN				TWO PLACE .XX ± .015									
RELEASE TRAVEL----- .030 MIN				THREE PLACE .XXX ± .005									
						ANGLES X ± 3°		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME V7-7B17D8-073
				THIRD ANGLE PROJECTION 		Pro/ENGINEER 2D			SCALE 2 : 1			SHEET 1 OF 1	