

MICRO SWITCH
a Honeywell Division



FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

V7-7B17D8-201

CW-C6117

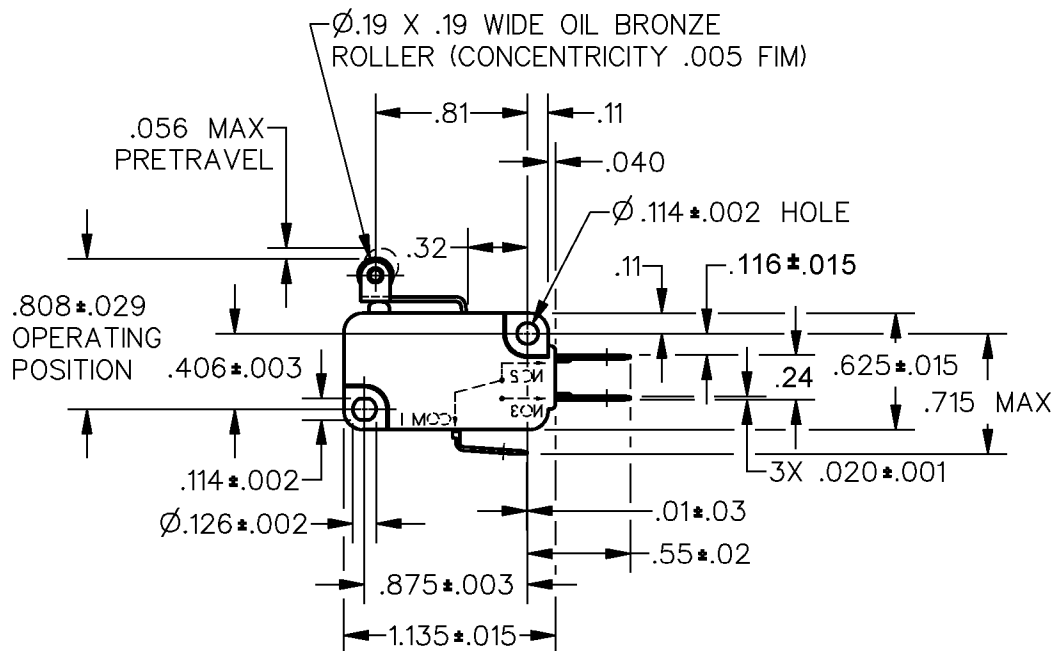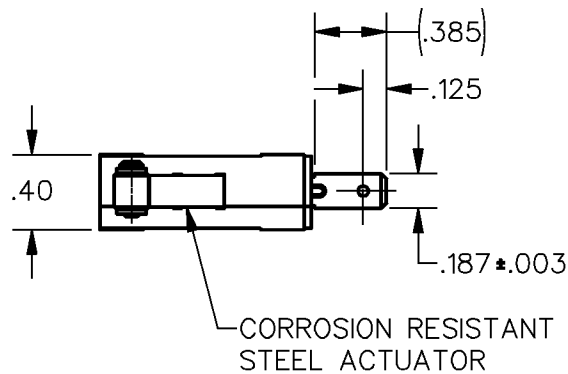


REVISIONS

A	PR23389	17 APR 98
B	0085964	30 JAN 12

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — 10 OZ MAX
 RELEASE FORCE — — — — 1 OZ MIN
 DIFFERENTIAL TRAVEL — — — .013 MAX
 OVERTRAVEL — — — — .034 MIN
 RELEASE TRAVEL — — — .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T

L156 11A 1/3HP 125, 250 OR 277 VAC
 1/2A 125 VDC, 1/4A 250 VDC
 4A 125 VAC "L"



SCALE NONE DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT

RASTER

DRAWN

TSM

JAF

17 APR 98

CHECK

CMH

30 JAN 12

SBH

30 JAN 12

CHECK

3

M

PAGE 1 OF 1

V7-7B17D8-201

CATALOG LISTING