

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

V7-7B27D8

CW-C6139

CATALOG LISTING

V7-7B27D8

REPLACES

PR-20996

ISSUE

1

CHECK

REVISIONS

CHECK


CHECK

28 FEB 94

DCS

DDM/CAD


DRAWN

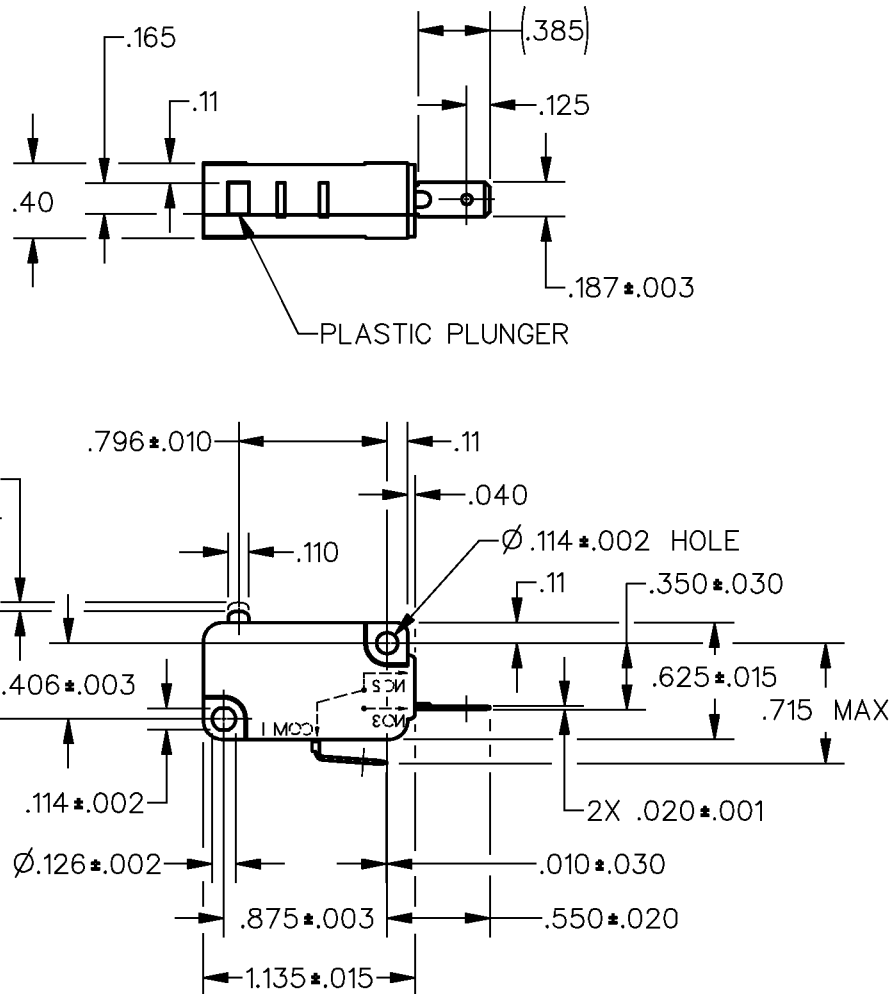

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 8 OZ MAX	CONTACT ARRANGEMENT S P N O	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 2 OZ MIN			
DIFFERENTIAL TRAVEL — — — .002-.010	L156 11A 1/3HP 125, <u>250</u> OR 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 4A 125 VAC "L"	ONE PLACE (.0)	± .030
OVERTRAVEL — — — — .050 MIN		TWO PLACE (.00)	± .015
FREE POSITION — — — — .625 MAX		THREE PLACE (.000)	± .005
RELEASE TRAVEL — — — — .010 MIN		ANGLES	±
		WEIGHT	