


HONEYWELL PART NUMBER
V7-9W2AE9
CWC6393

REV	DOCUMENT	CHANGED BY	CHECK
B	0009549	DVM 19NOV04	AK

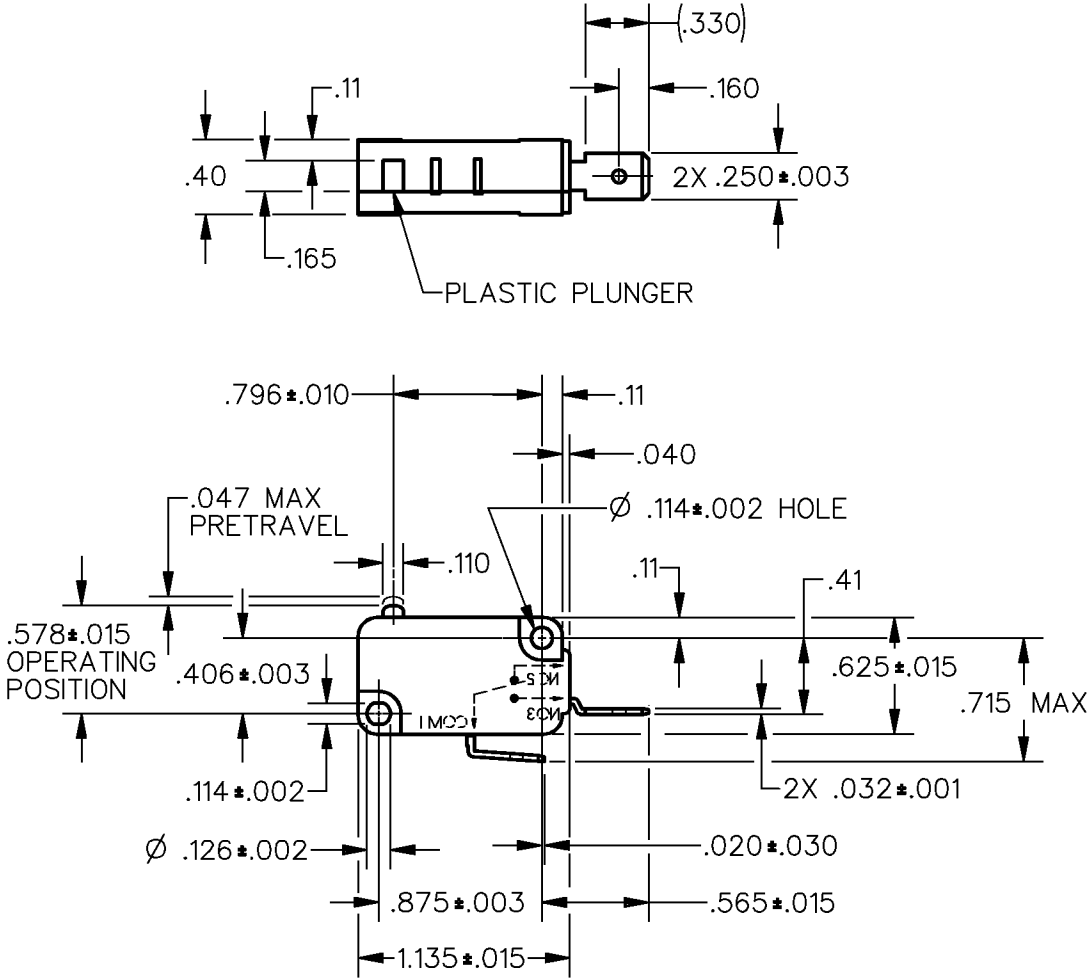

- NOTES
- 1 - MAXIMUM MECHANICAL DEAD BREAK OF .0025 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION
 - 2 - SILVER PLATED TERMINALS
 - 3 - SWITCH WILL FUNCTION A MINIMUM OF 1000 ACTUATIONS AT RATED LOAD WHILE EXPOSED TO A 350°F ENVIRONMENT FOR 600 HOURS

REPLACES X115872-V7

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN		KSR		09NOV04		Honeywell			
OPERATING FORCE— — —300 GRAMS MAX		CONTACT ARRANGEMENT				CHECK		AK		09NOV04					
RELEASE FORCE— — —25 GRAMS MIN		L264 15.1A 125, <u>250</u> , 277 VAC Ⓟ  		NO PLACE X ± 0.040		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.						TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL— — —.010 MAX				ONE PLACE .X ± 0.030											
OVERTRAVEL — — — — —.050 MIN				TWO PLACE .XX ± 0.015											
FREE POSITION — — — — —.630 MAX				THREE PLACE .XXX ± 0.005		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE		TYPE		DRAWING NAME		REV	
RELEASE TRAVEL — — — — —.010 MIN				FOUR PLACE .XXXX ± 0.0005				B		I		V7-9W2AE9		B	
				THIRD ANGLE PROJECTION 		RASTER		SCALE 1:1				SHEET 1 OF 1			