

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
WA-1RVX132-A4

X87681-WA

REPLACES

RELEASE NO. PR-19926

CHECK

CHECK

17 JUN 92

L A D

CHECK

G R T 20 MAY 92

CATALOG LISTING


WA-1RVX132-A4



ISSUE
5

REVISIONS

A	CO	73287-6	G R T	28 OCT 93
B	CO	77247	J A K	1 MAR 94
C	CO	79609-A	S A V	9 MAR 95
D	CO	80986	L J F	7 JUN 95

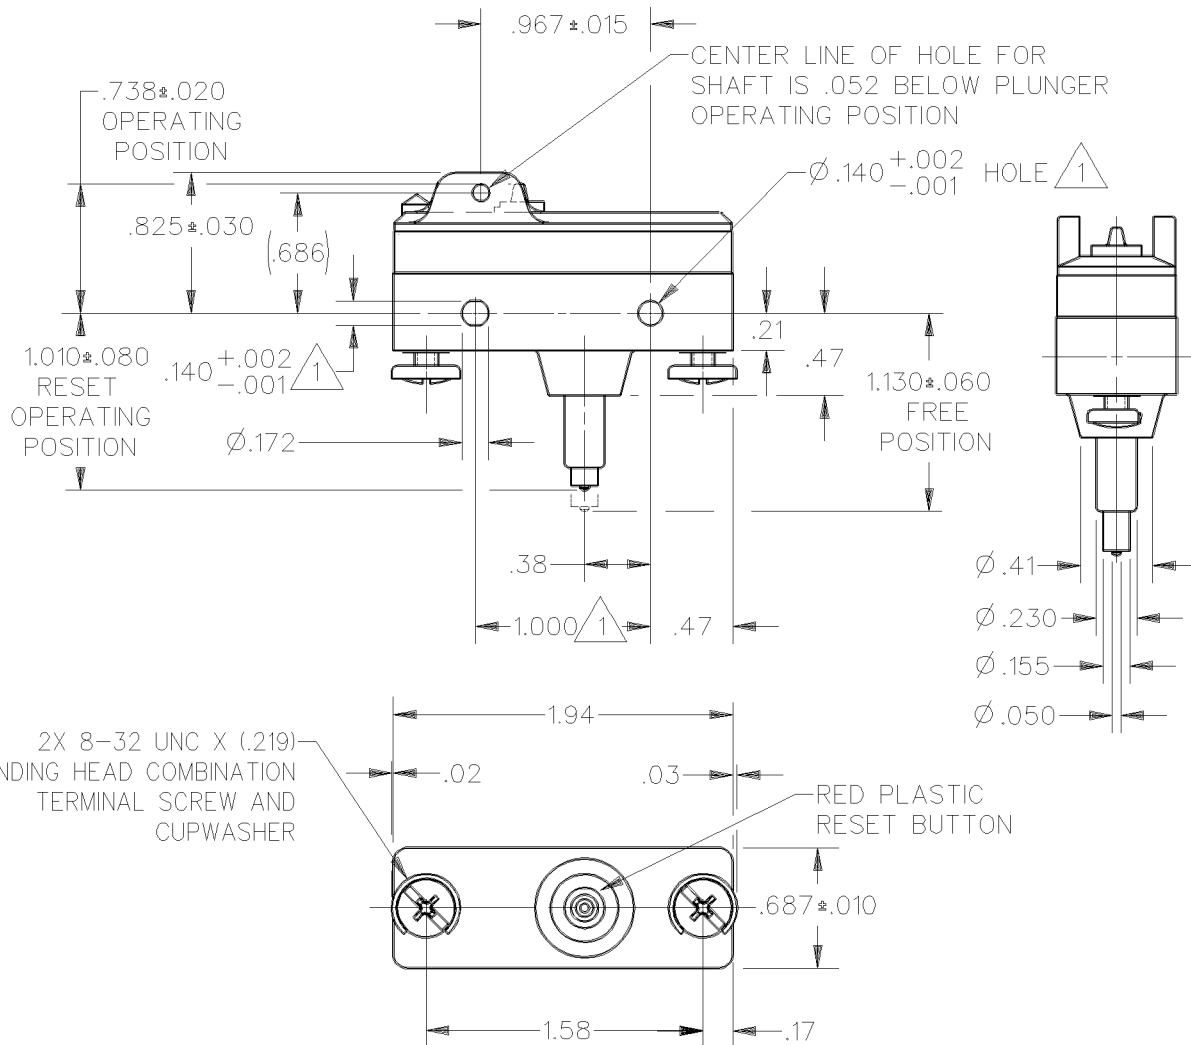


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000 CENTERS
- 2 - SWITCH WILL NOT RECYCLE OR ACT AS A MOMENTARY ACTION SWITCH IF LEVER IS RELEASED WHEN RESET PLUNGER IS CONTINUALLY DEPRESSED
- 3 - LEVER, PIN AND SPRING FURNISHED UNASSEMBLED IN BULK

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE - - - - 17 OZ MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
OVERTRAVEL - - - - - .010 MIN	S P N C - MAINTAINED CONTACT			
RESET CHARACTERISTICS	L178	ONE PLACE	(.0)	±.030
OPERATING FORCE - - - - 32 OZ MAX	20A 125, 250, 277 VAC	TWO PLACE	(.00)	±.015
OVERTRAVEL - - - - - .040 MIN	3/4HP 125 VAC, 1 1/2HP 250 VAC	THREE PLACE	(.000)	±.005
		ANGLES		±
		WEIGHT		

