

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

WA-1RX123-A4

ACT3220

WA-1RX123-A4
PAGE 1 OF 1

M

DRAWING
NUMBER

9

ISSUE

REPLACES

RELEASE NO. PR-1820

CHECK

REVISIONS

A	CO35671	D J W	28 JUL 75
B	CO-36788	J A L	17 MAR 76
C	CO-65807-C	CO	24 AUG 89
D	CO-70483	CO	20 OCT 93
E	CO-73287-C	CO	14 FEB 95
F	CO-79609-A	DLT	18 AUG 98
G	CO93346	DLT	0015539
H	CO015539	BM	30SEP05

VA

CHECK

LSD

CHECK


71

OMW

21 APR

RASTER

FO-50378-1A

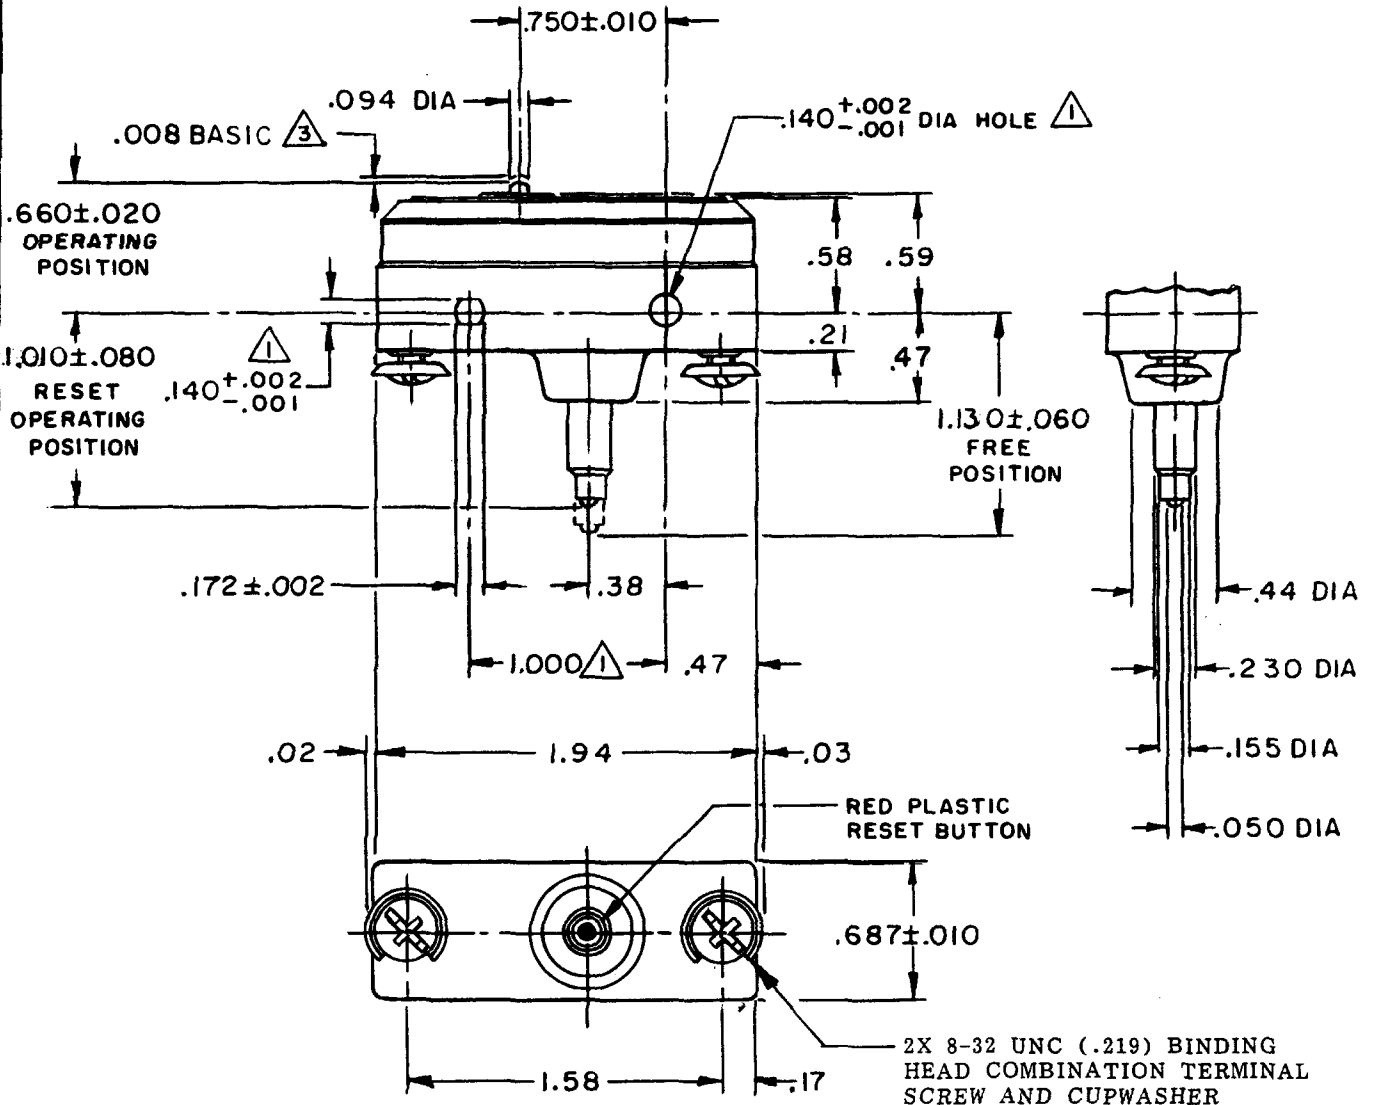

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS
- 2 SWITCH WILL NOT RECYCLE OR ACT AS A MOMENTARY ACTION SWITCH IF PIN PLUNGER IS RELEASED WHEN RESET PLUNGER IS CONTINUALLY DEPRESSED
- 3 SWITCH MUST BE CAPABLE OF BEING RESET WHEN PIN PLUNGER IS RELEASED .008 BASIC FROM OPERATING POSITION
- 4 GOLD PLATED CONTACTS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 4-16 OZ	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
OVERTRAVEL ----- .010 MIN	SINGLE POLE, NORMALLY CLOSED, MAINTAINED CONTACT	UNLESS OTHERWISE NOTED
RESET CHARACTERISTICS	CODE L22 1A-125 VAC	DIMENSIONS ARE IN INCHES
OPERATING FORCE ----- 32 OZ MAX	L288	TOLERANCES ARE:
OVERTRAVEL ----- .040 MIN	L315	ONE PLACE (.0) $\pm .030$
	L307	TWO PLACE (.00) $\pm .015$
		THREE PLACE (.000) $\pm .005$
		ANGLES $\pm$
		WEIGHT



1A 250V ~ T85 25E3