

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

WA-1RX33-A4

WA-1RX33-A4

PAGE 1 OF 1

M

DRAWING
NUMBER

9

ISSUE

REPLACES

RELEASE NO. PR-15334

CHECK

REVISIONS

A	C080986
	JALA
	11 JUN 95
B	C082632
	DLT
	25 JUL 96
C	C084043
	DLT
	21 MAR 97
D	C093346
	DLT
	23 SEP 98

CHECK

JAN 87

KAG

JAN 86

CHECK


JAN 86

S. J. S.

6

FORMTEK

DRAWN

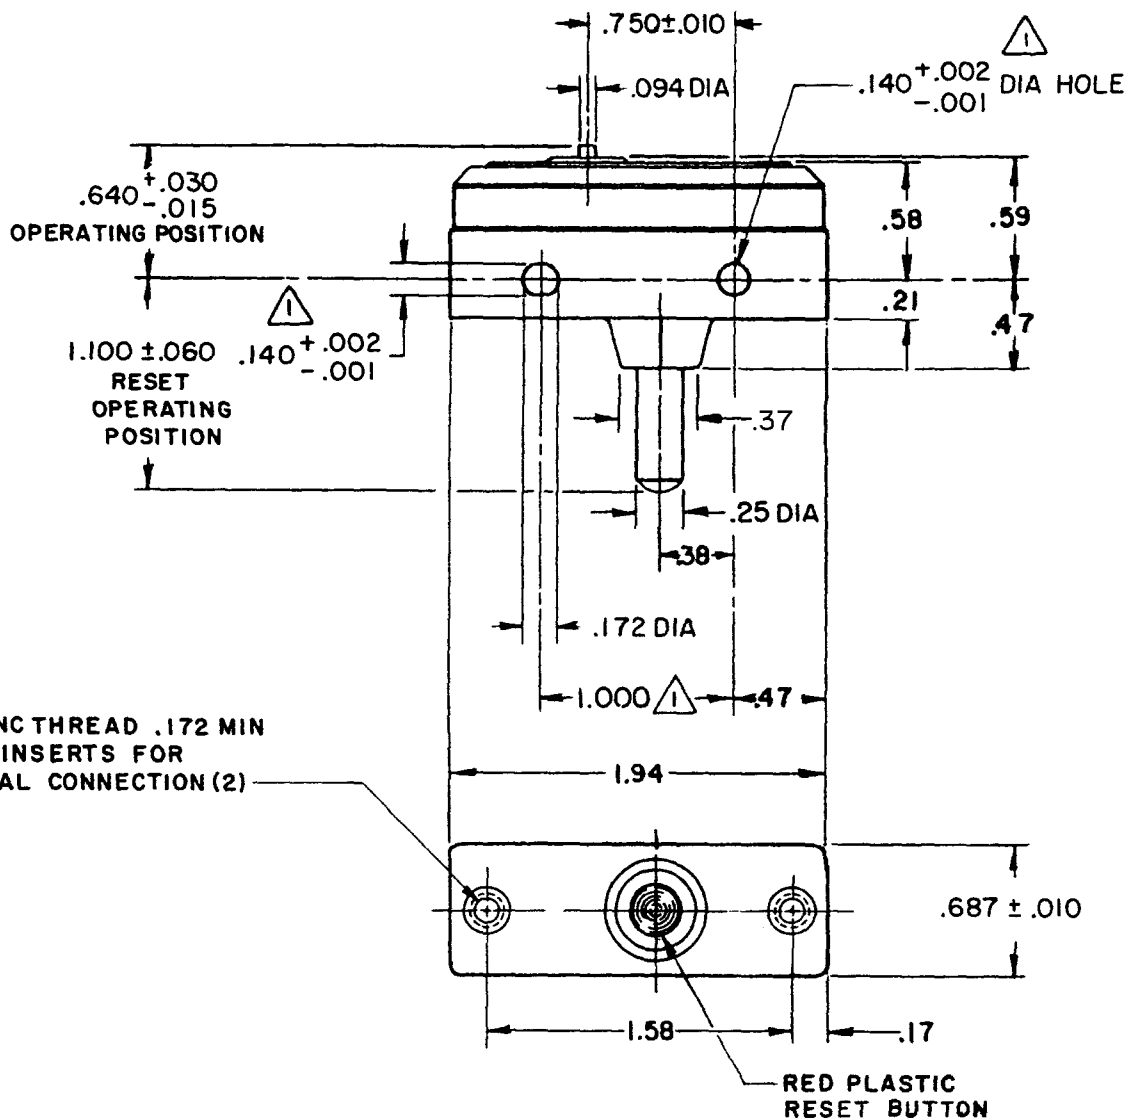

NOTES



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000^{±.002} CENTERS

2 - 2X BINDING HEAD TERMINAL SCREW AND 2X CUPWASHER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 20 OZ MAX
DIFFERENTIAL TRAVEL ——— .008 MAX
(WITH RESET PLUNGER HELD FULLY DEPRESSED)
OVERTRAVEL ——— .010 MIN

RESET CHARACTERISTICS

OPERATING FORCE ——— 25 OZ MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
SINGLE POLE NORM CLOSED
MAINTAINED CONTACT

L178

20A 125, 250, 277 VAC
3/4HP 125 VAC, 1 1/2HP 250 VAC

L288
L299
L308

CE Ⓢ TP

20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT