

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING
WA-2R-A21

(M) WA-2R-A21
ISSUE 1

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK

CSL 28 JUN 96

CATALOG LISTING

WA-2R-A21
PAGE 1 OF 1


M

ISSUE

9

REVISIONS

A	C083054
	CSL
	28 JUN 96
B	C092159
	CSL
	21 JAN 98
C	C093346
	DLT
	26 AUG 98

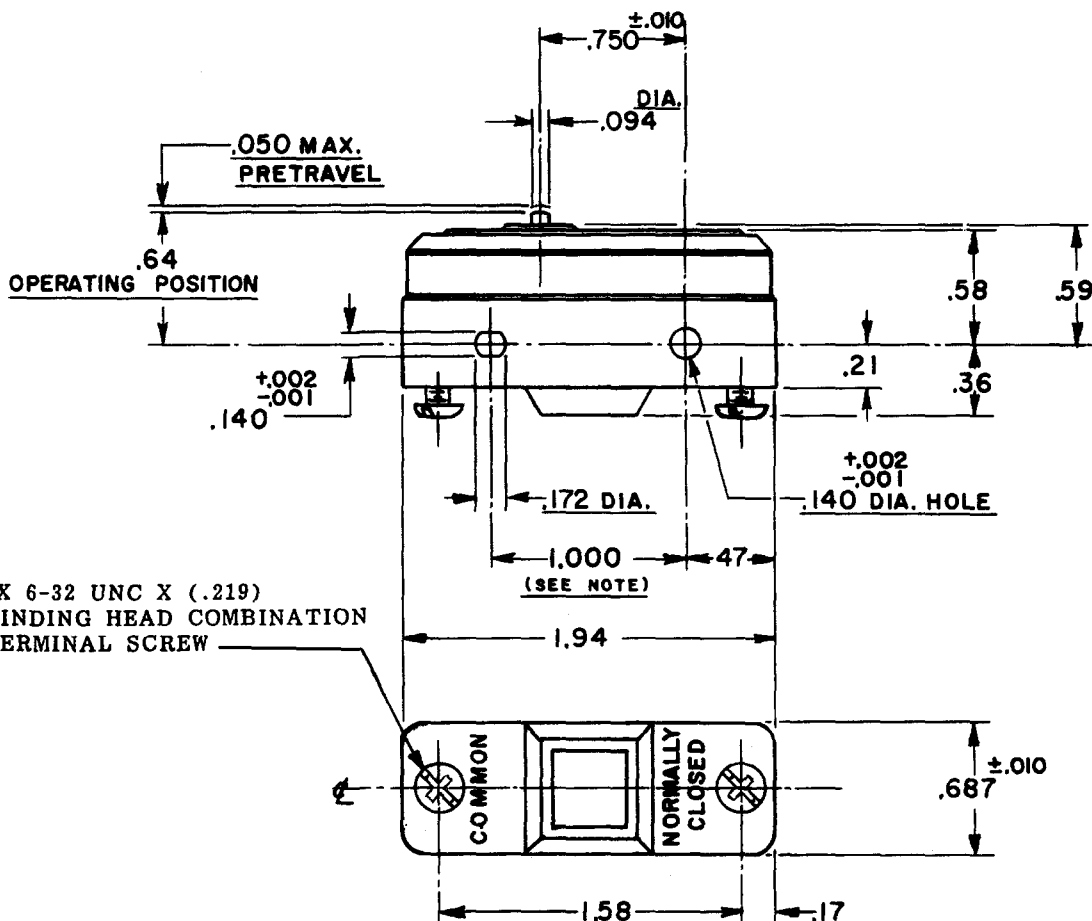


2X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW

NOTE:
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE - - - - - 14-22 OZ.
RELEASE FORCE - - - - - 10 MIN.
DIFFERENTIAL TRAVEL - - -.002 -.0075
OVERTRAVEL - - - - - .010 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
S.P.N.C.

L23 20A 125, 250 OR 480 VAC
10A 125 VAC "L"
1HP 125 VAC, 2HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L308



20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT .063 LB.

FORMTEK

DRAWN