

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

WA-2RV178-A2**WA-2RV178-A2**

PAGE 1 OF 1

MDRAWING
NUMBER

5

ISSUE

REPLACES

RELEASE NO. CO-34312

CHECK

REVISIONS

A	CO-73287-J	JAL	22 NOV 93
B	CO-77591	DAW	22 JUN 94
C	CO-79125	SAD	30 NOV 94
D	CO93346	DLT	27 AUG 98

CHECK

28 APR 75


75 CHECK D/W

K P K24 APR 75

FORMTEK


FD-52848-A

DRAWN

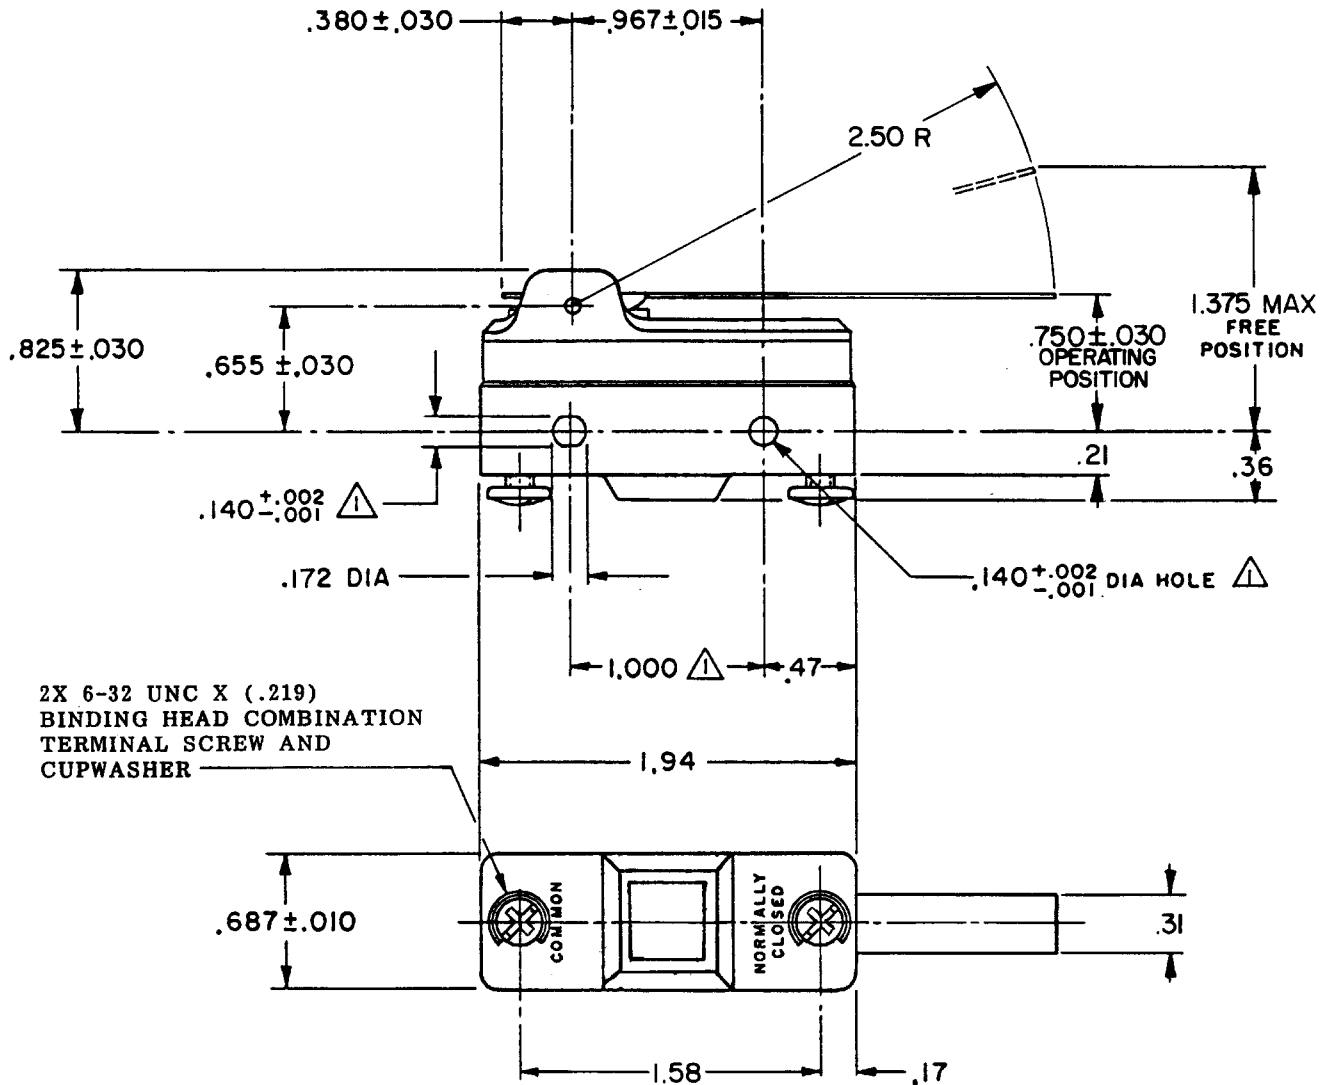

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE—2 1/2 OZ MAX

RELEASE FORCE—1/2 OZ MIN

PRETRAVEL—.625 MAX

DIFFERENTIAL TRAVEL—.109 MAX

OVERTRAVEL—.078 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P N CUL LISTED - FILE E12252
20A-125, 250 OR 480 VAC; 10A-125 VAC "L"
1HP-125 VAC; 2HP-250 VAC
CODE L23 1/2A-125 VDC; 1/4A-250 VDCL288
L299
L308

20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04	X	0.8/.03
ONE PLACE	X,X	0.4/.016	X,X	0.38/.015
TWO PLACES	X,X,X	0.15/.006	X,X,X	0.13/.005
THREE PLACES				
ANGLES				

DESIGN UNITS

SI METRIC

US CUSTOMARY

WEIGHT