

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

WA-2RV313-A22

WA-2RV313-A22

PAGE 1 OF 1

M

DRAWING
NUMBER

4

ISSUE

REPLACES X92103-WA


RELEASE NO. PR-18305

CHECK

REVISIONS

A	CO-77591
DAW	22 JUN 94
B	CO-79125
SAD	30 NOV 94
C	CO93346
DLT	27 AUG 98

CHECK

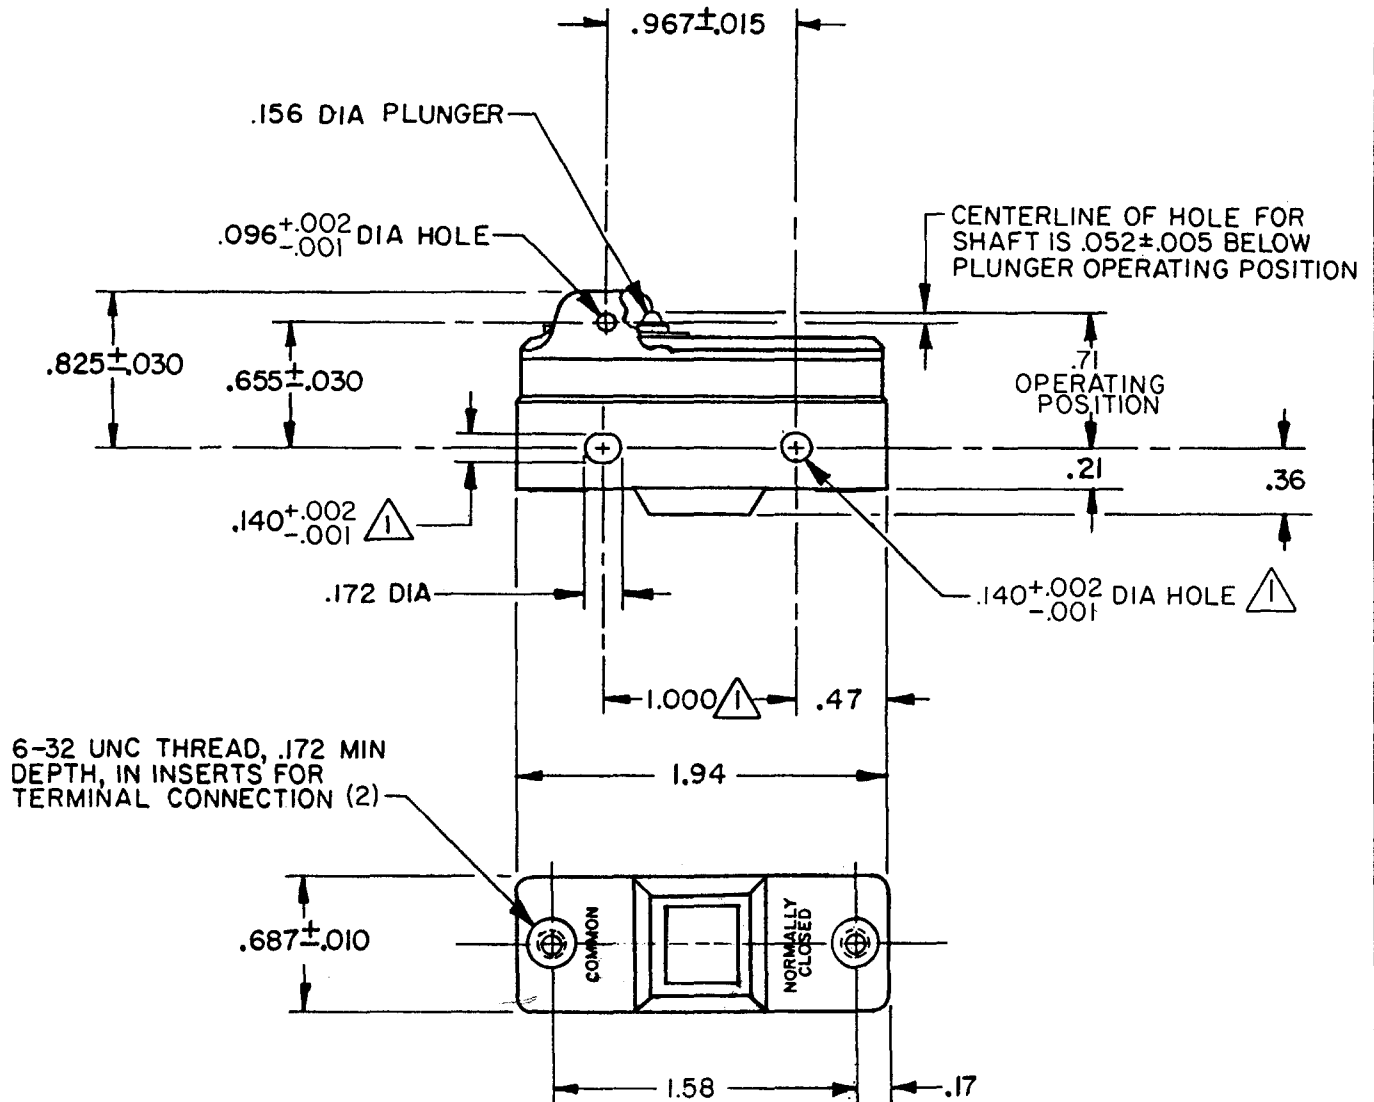


NOTE

1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE-----14-22 OZ

RELEASE FORCE-----10 OZ MIN

DIFFERENTIAL TRAVEL----.0020-.0075

OVERTRAVEL-----.010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

L23 20A 125, 250, OR 480 VAC
10A 125 VAC "L"
1 HP 125 VAC, 2 HP 250 VAC
1/2 A 125 VDC, 1/4 A 250 VDC

L288
L299
L308



20(3)A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE Z

	DIM.	TOL.	DIM.	TOL.
	mm	mm/in	in	mm/in
NO PLACES	X	1/.04		
ONE PLACE	X,X	0.4/.018	X,X	0.3/.03
TWO PLACES	X,XX	0.18/.008	X,X,X	0.38/.018
THREE PLACES			X,X,X,X	0.13/.005

SI METRIC

US CUSTOMARY

DESIGN UNITS



WEIGHT

FORMTEK

FO-52848-A

DRAWN

B A B 24 MAY 90 CHECK