

# MICRO SWITCH

FREEMONT ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

## SWITCH - BASIC

CATALOG LISTING

WM-1RW82294T

WM-1RW82294T

M

DRAWING  
NUMBER

8

ISSUE

REPLACES X74644-WM

RELEASE NO. PR-11142

CHECK

### REVISIONS

|   |           |
|---|-----------|
| A | C080986   |
|   | JALA      |
|   | 26 JUN 95 |
| B | 0035411   |
|   | JA        |
|   | 23NOV07   |

ASD

CHECK

MAY 82

3

CEB


CHECK

30 APR 82

WJM

RASTER

DRAWN

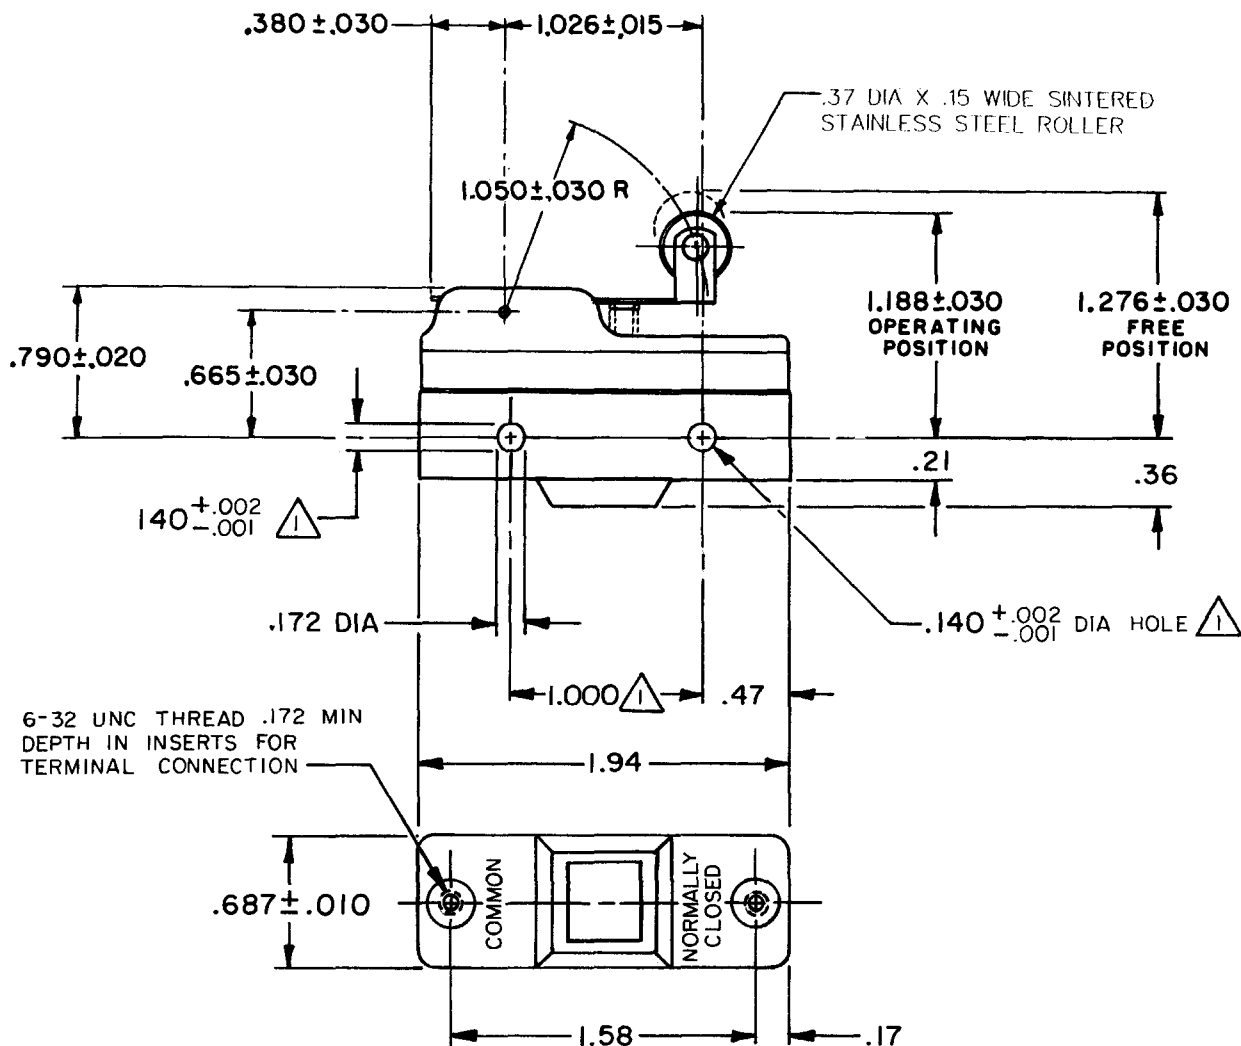

### NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - TERMINAL SCREW (2) FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

### CHARACTERISTICS

OPERATING FORCE ---- 5 3/4 OZ MAX  
RELEASE FORCE ---- 1 1/2 OZ MIN  
DIFFERENTIAL TRAVEL ---- .001 - .013  
OVERTRAVEL ---- .094 MIN

### ELECTRICAL DATA

CONTACT ARRANGEMENT  
S P N C

UL LISTED - FILE E12252  
CODE L161 22A-125, 250, 480VAC  
1/2HP-125VAC; 1HP-250VAC

L288  
L315  
L318



22A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

### TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

| DIM.         | TOL.   | DIM.   | TOL.   |
|--------------|--------|--------|--------|
| mm           | mm/in  | in     | mm/in  |
| NO PLACES    | X      | 1/64   |        |
| ONE PLACE    | X, X   | 0.0010 | X, X   |
| TWO PLACES   | X, XX  | 0.0005 | X, XX  |
| THREE PLACES | X, XXX | 0.0001 | X, XXX |
| ANGLES       |        |        |        |

SI METRIC

US CUSTOMARY

DESIGN UNITS

☐

☒

WEIGHT .076 LB