
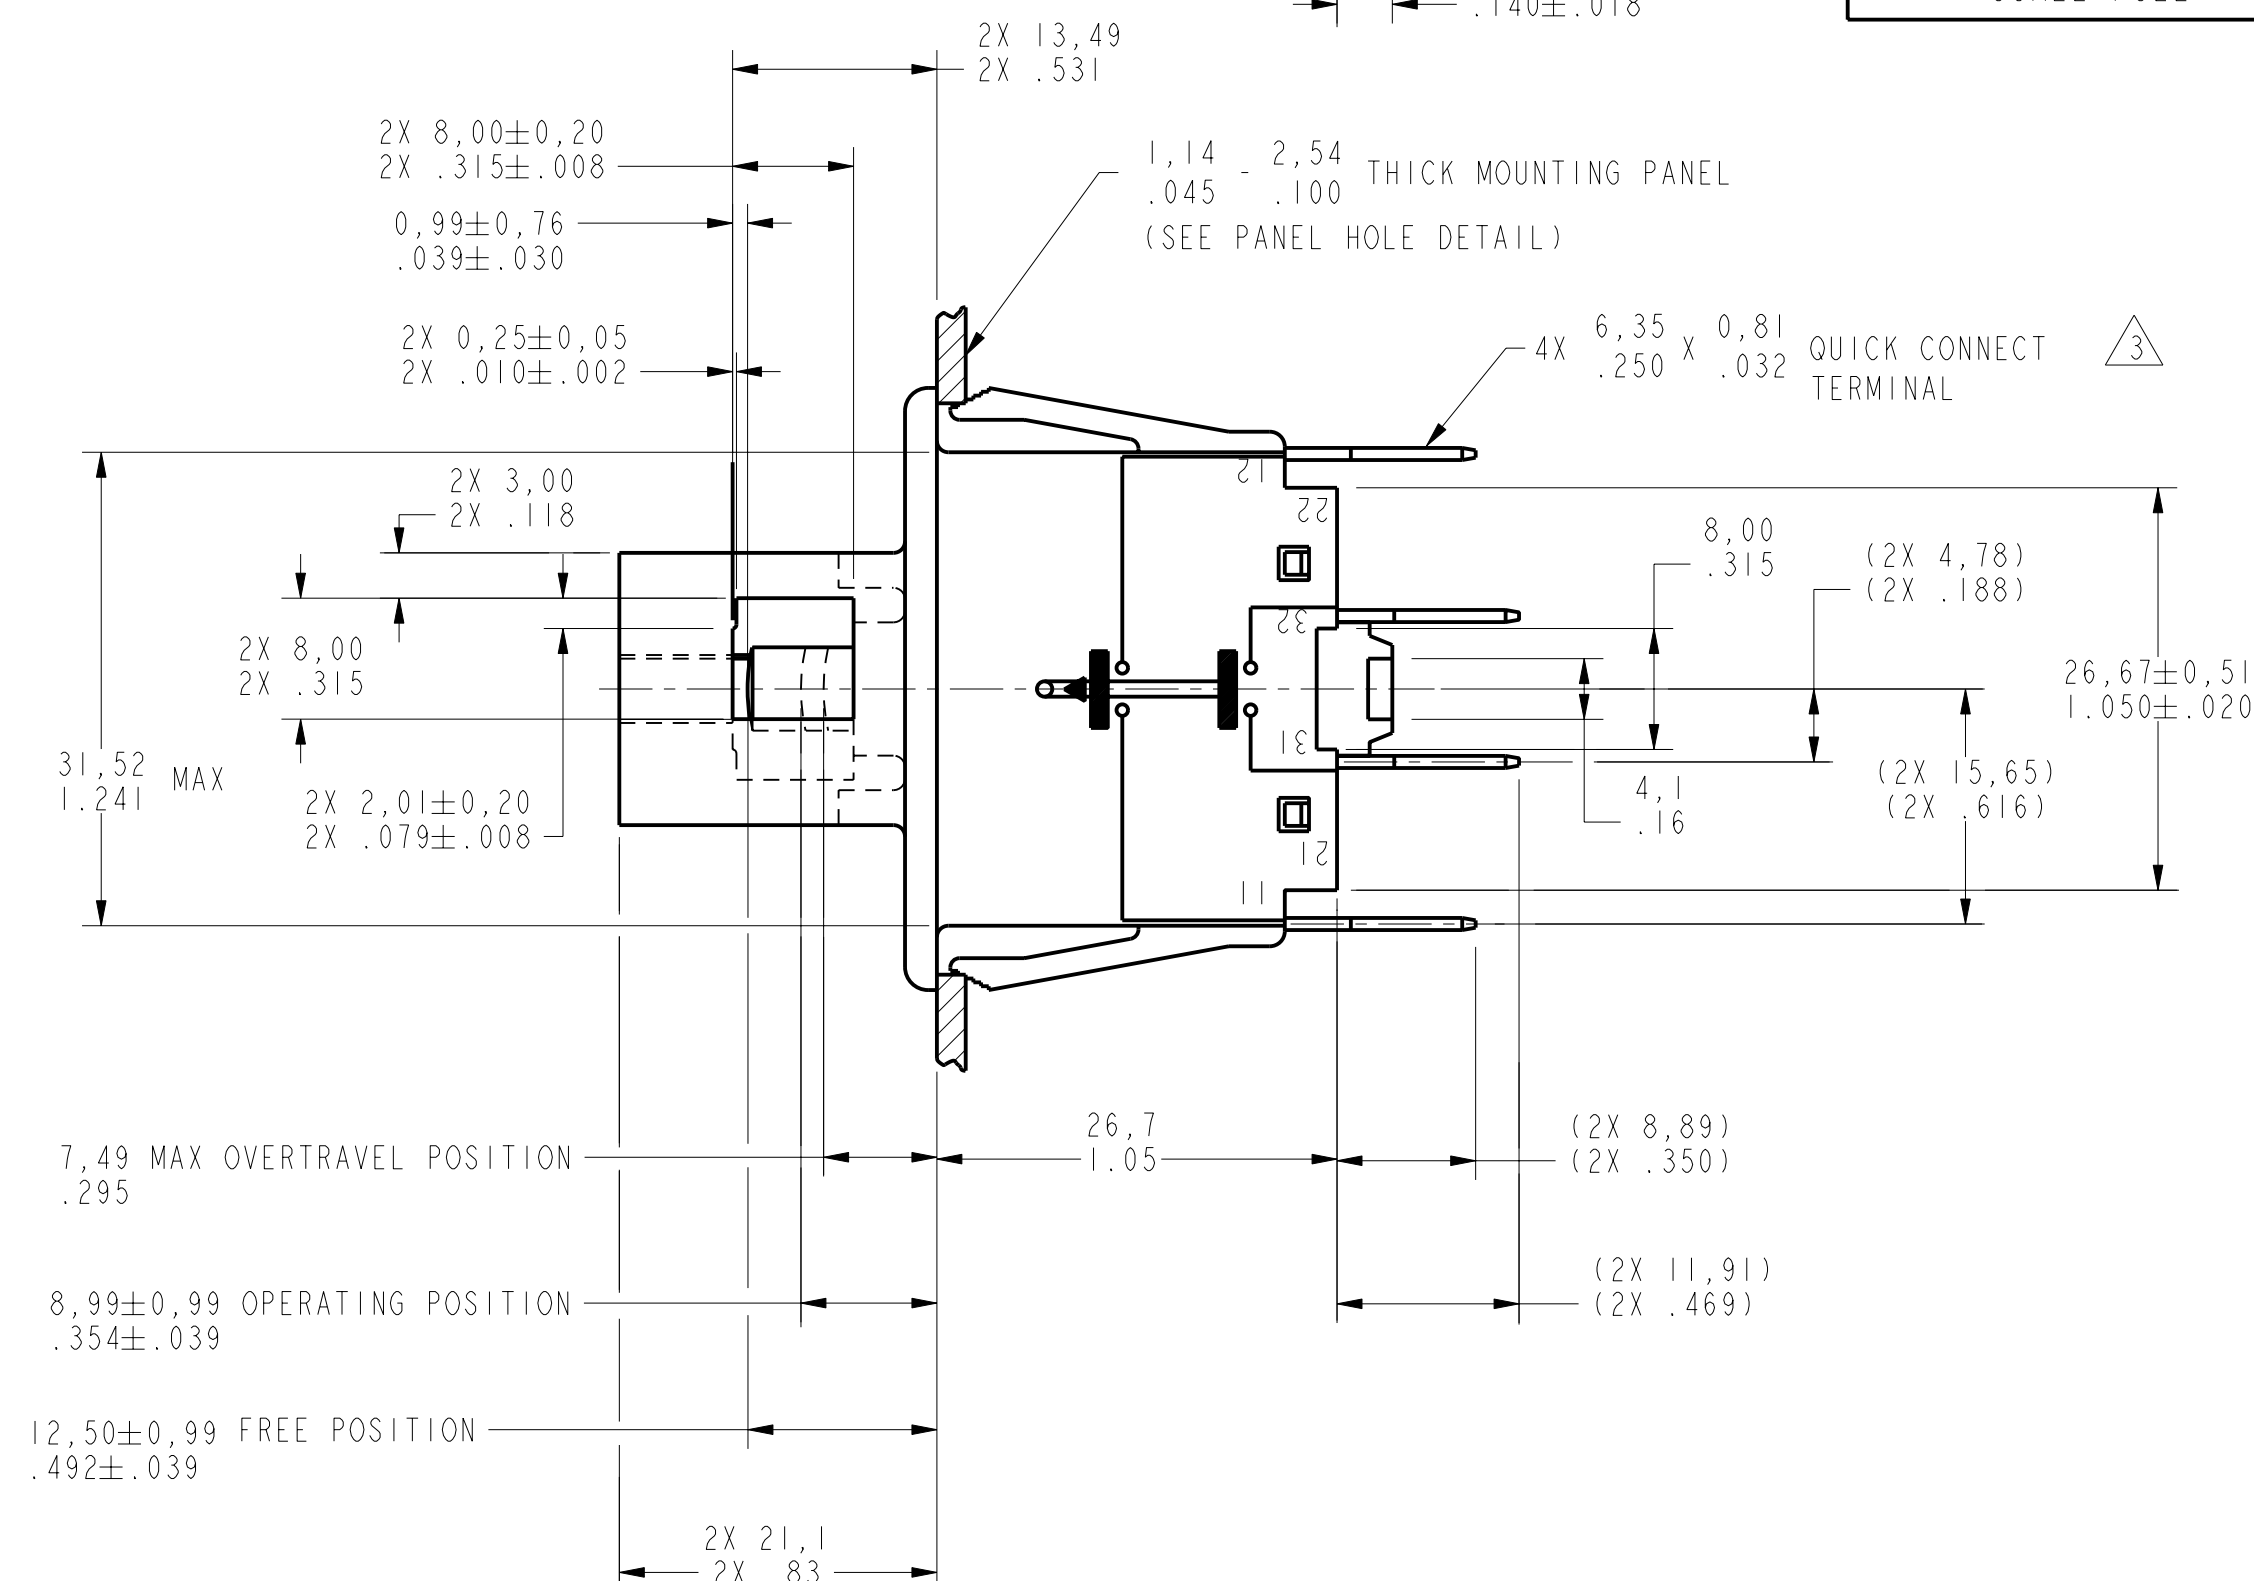
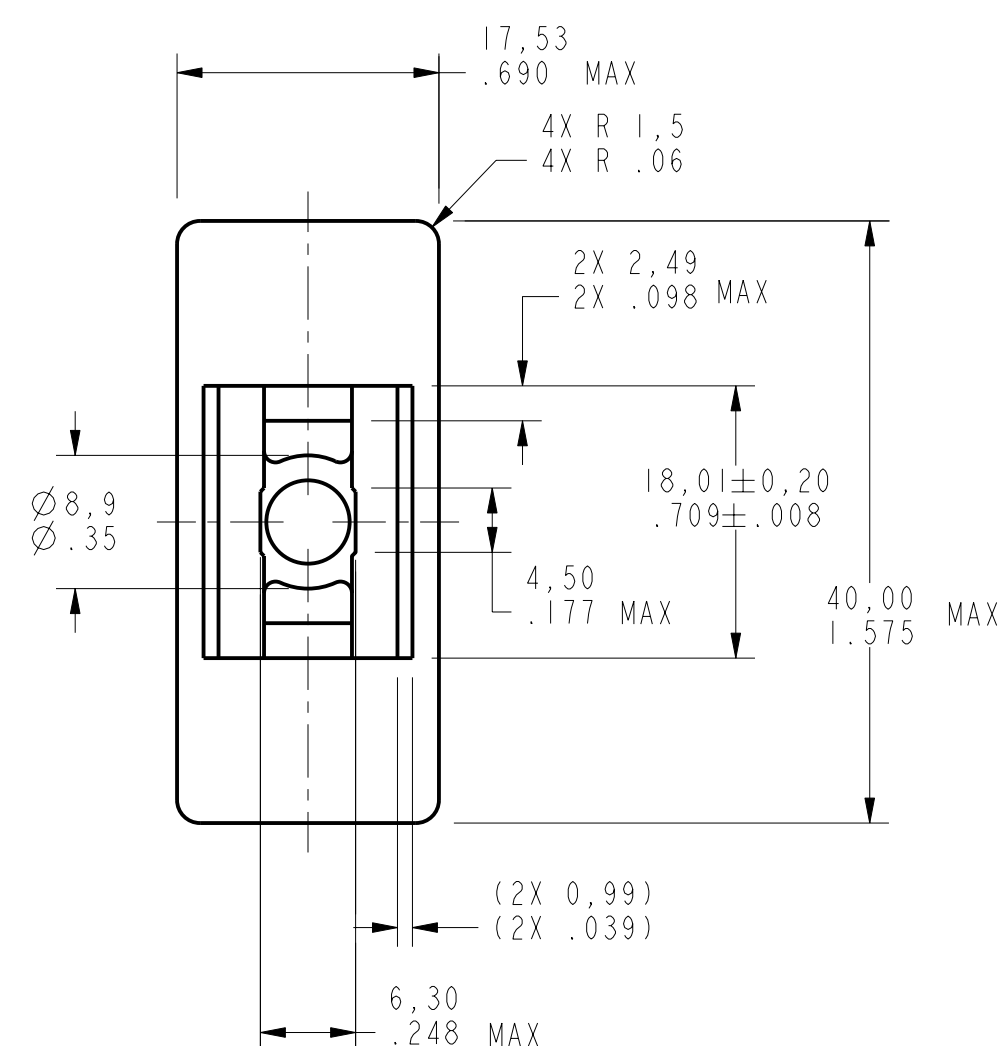
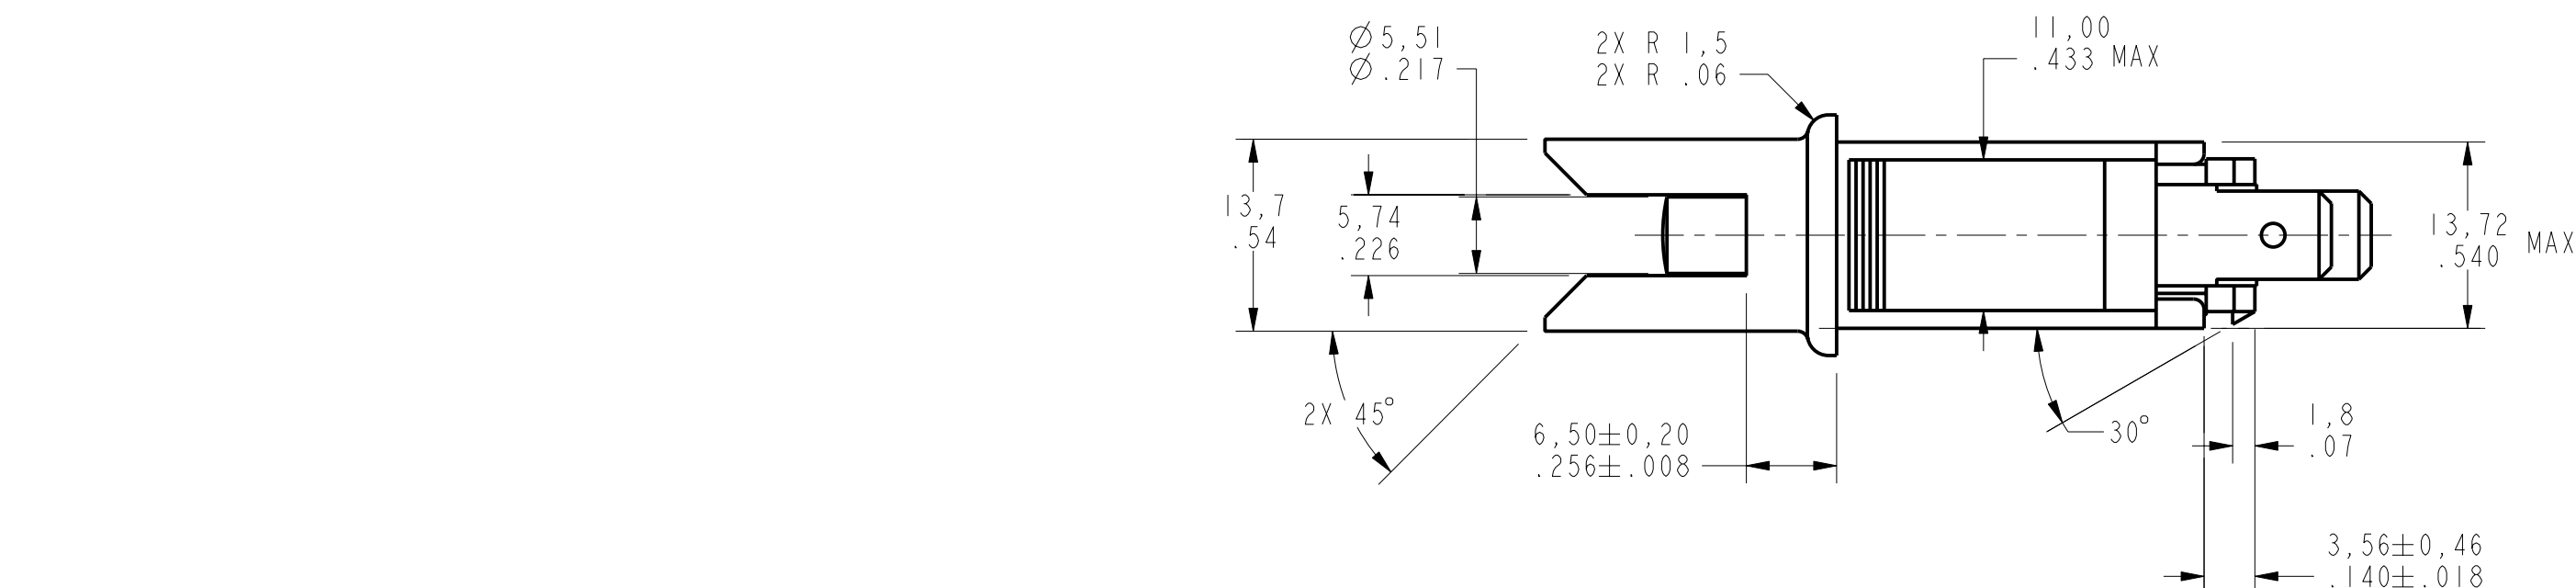


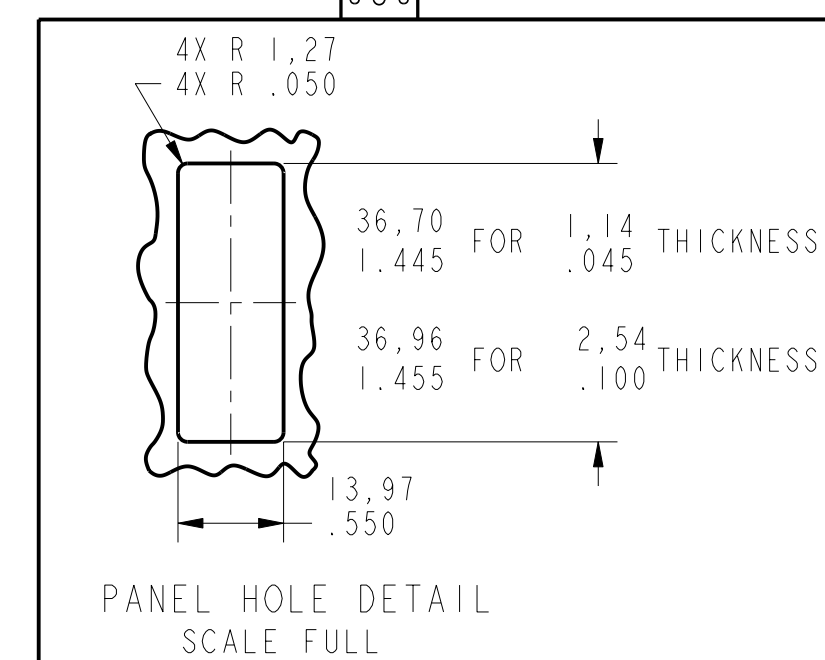

1 - BLACK PLASTIC HOUSING AND PLUNGER
2 - HOUSING HAS BOSS AROUND PLUNGER TO MEET BSI AND VDE
AGENCY 8,00/.315 CLEARANCE REQUIREMENT
3 QUICK CONNECT TERMINALS CONFORM TO 6,35/.250 WIDE X
0,81/.032 THICK NEMA DC-2 SPECIFICATION


CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE - - - 9N/32 OZ APPROX AT FULL OVERTRAVEL	CONTACT ARRANGEMENT DOUBLE POLE
OVERTRAVEL - - - - - (2,00/.079)	16A 1/2HP 125, 250 VAC 3A 125 VAC "L" PILOT DUTY: 150 VA 125, 250 VAC 2A - 24 VDC (CKT 11-12 AND 31-32) 60/75°C (CU) 

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - BASIC

WW1G02A-D9

THIRD ANGLE PROJECTION			
			
SCALE 2:1			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :			
	DIM. mm	TOL. mm (1:1)	
NO PLACES	X	1 / 0.04	X.XX 0.8 / 0.03
ONE PLACE	X.X	0.4 / 0.016	X.XX 0.38 / 0.01
TWO PLACES	X.XX	0.15 / 0.006	X.XXX 0.13 / 0.005
THREE PLACES			0.050
ANGLES			°
DESIGN UNITS	SI METRIC 	US CUSTOMARY 	
WEIGHT			