
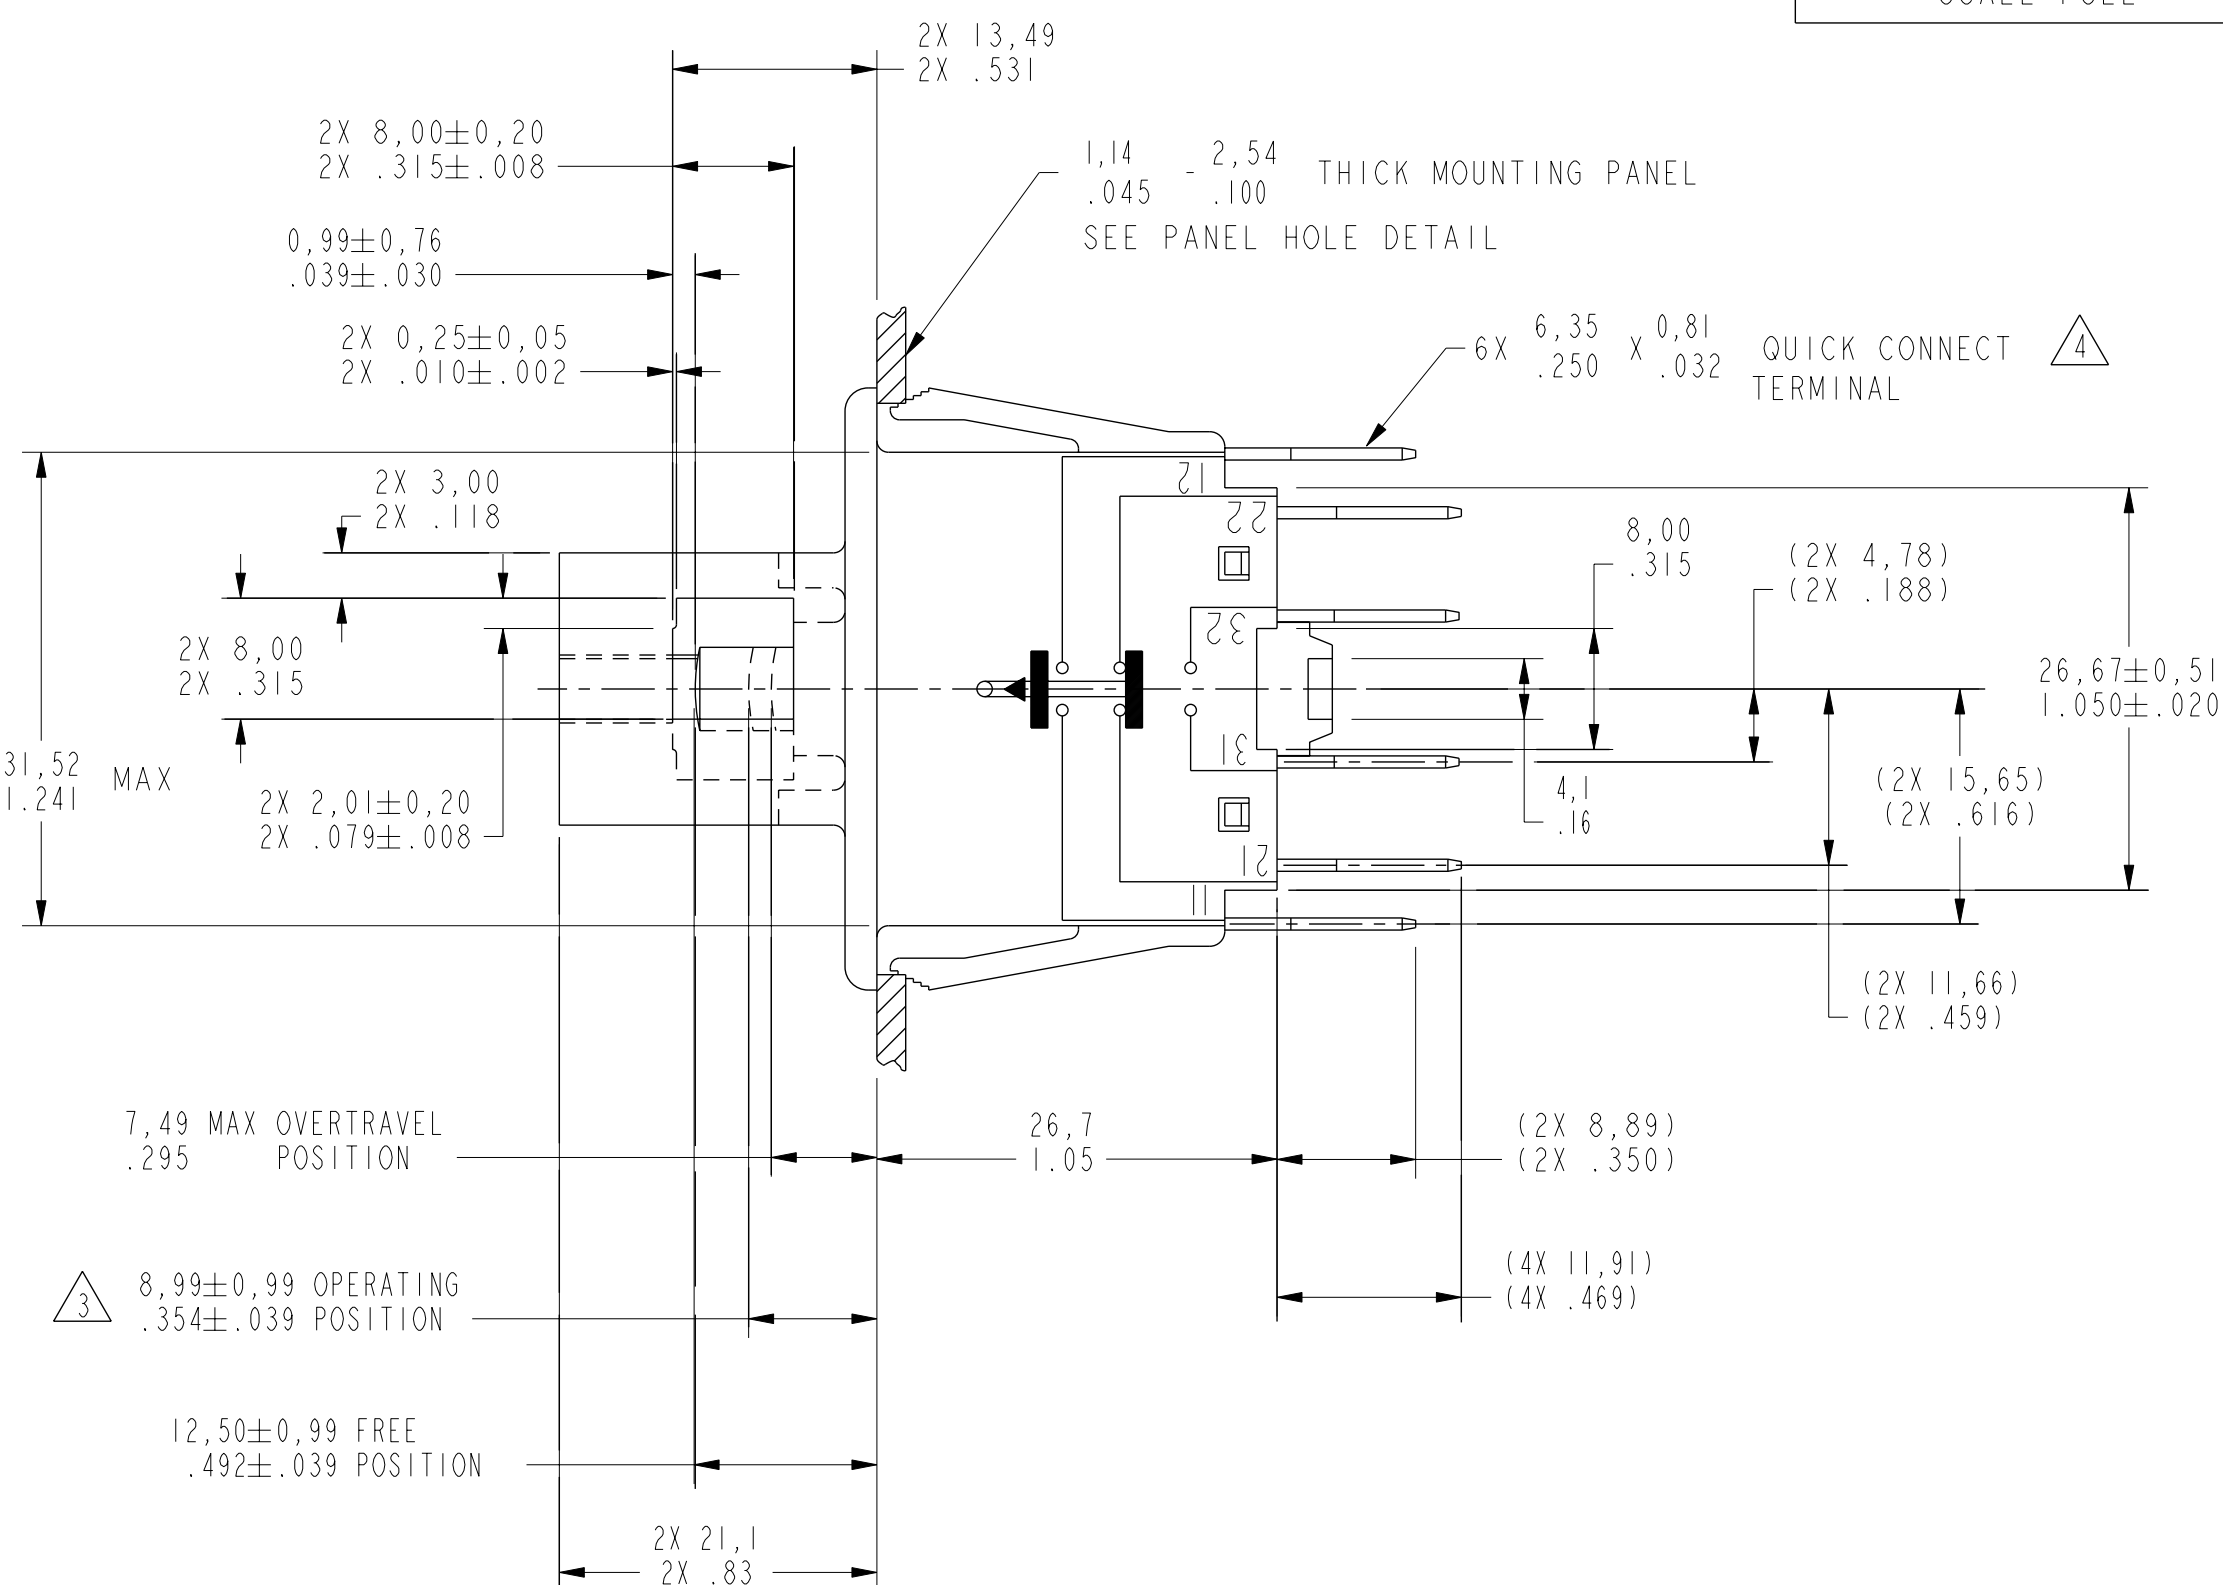
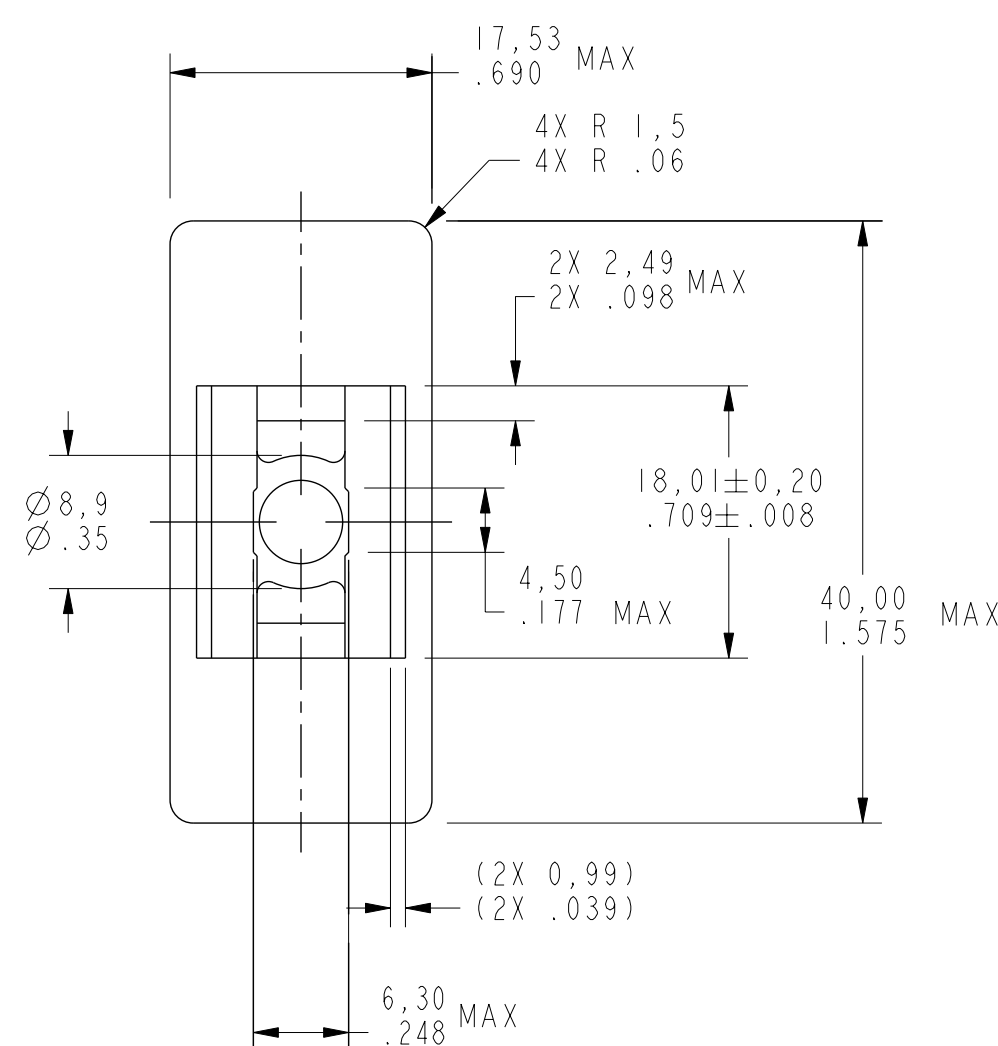
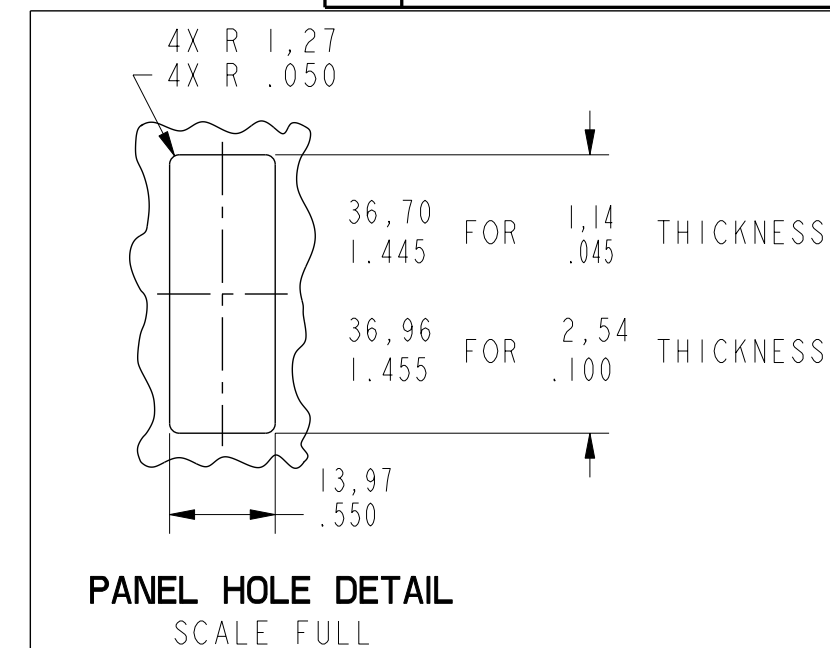


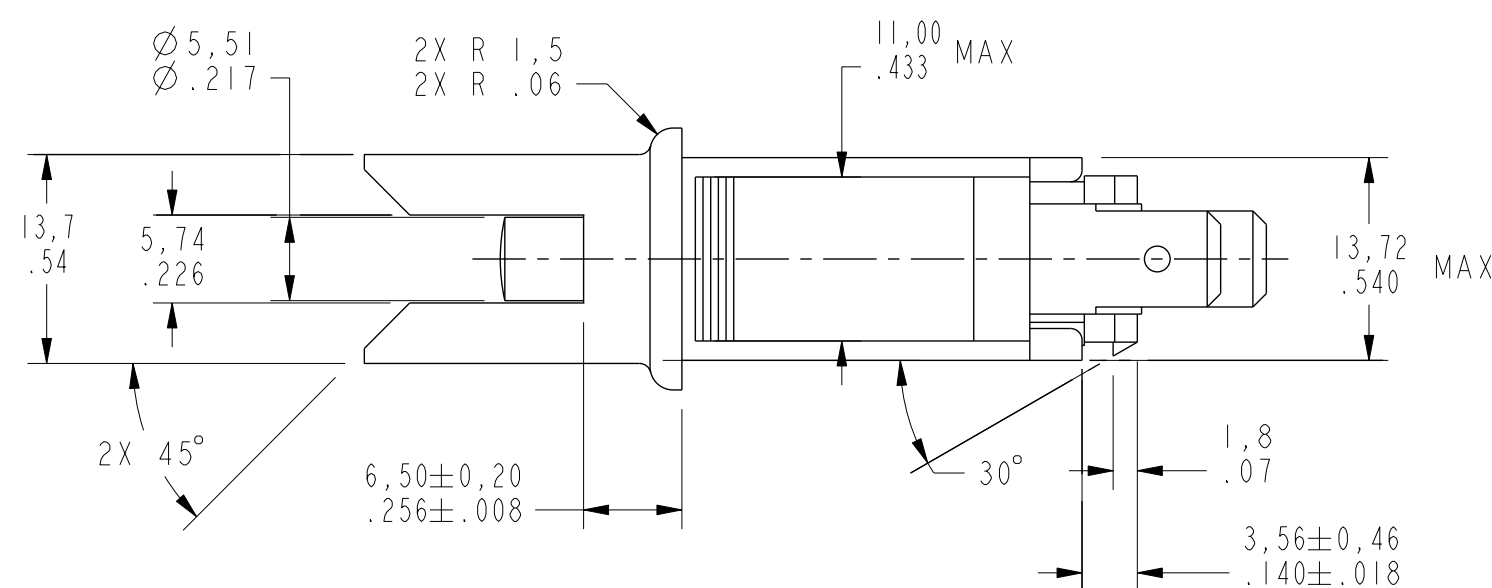

NOTES

- 1 - BLACK PLASTIC HOUSING AND PLUNGER
- 2 - HOUSING HAS BOSS AROUND PLUNGER TO MEET BSI AND VDE AGENCY
8,00/.315 CLEARANCE REQUIREMENT
- 3 APPLIES TO CIRCUITS 11-12 & 31-32, CIRCUIT 21-22 OPENS AT
11,91 $\pm$ 0,99/.469 $\pm$ 039
- 4 QUICK CONNECT TERMINALS CONFORM TO 6,35/.250 WIDE X
0,81/.032 THICK NEMA DC-2 SPECIFICATION


CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE - - - 9N/32 OZ APPROX (CIRCUITS 11-12 & 31-32)	CONTACT ARRANGEMENT TRIPLE POLE
OVERTRAVEL - - - - 2,00/.079 MIN (CIRCUITS 11-12 & 31-32)	(CKT 11-12, 31-32) 2A 24 VDC; 15A 125 VAC; 10A 250 VAC; 1/2HP 125, 250 VAC; 3A 125 VAC *L*; PILOT DUTY 150 VA 125, 250 VAC (CKT 21-22) 0.1A 125 VAC-DC 60/175°C (CU) 

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - BASIC

WW1K05D-D9

THIRD ANGLE PROJECTION				
				
SCALE 2 : 1				
DO NOT SCALE PRINT				
TOLERANCES				
APPLY TO DESIGN UNITS. CONVERSIONS ARE FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :				
	DIM. mm	TOL mm (1 in)	DIM. in	TOL mm (1 in)
NO PLACES	X	1 / .04	X, X	0.8 / .03
ONE PLACE	X, X	0.4 / .016	X, XX	0.38 / .01
TWO PLACES	X, XX	0.15 / .006	X, XXX	0.13 / .00
THREE PLACES				
ANGLES				5°
	SI METRIC		US CUSTOMARY	
DESIGN UNITS				
WEIGHT				