



ISSUE

2

REVISIONS

A	CO-1	80586
K	D R	22 MAR 95


MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

WZ-1R15365

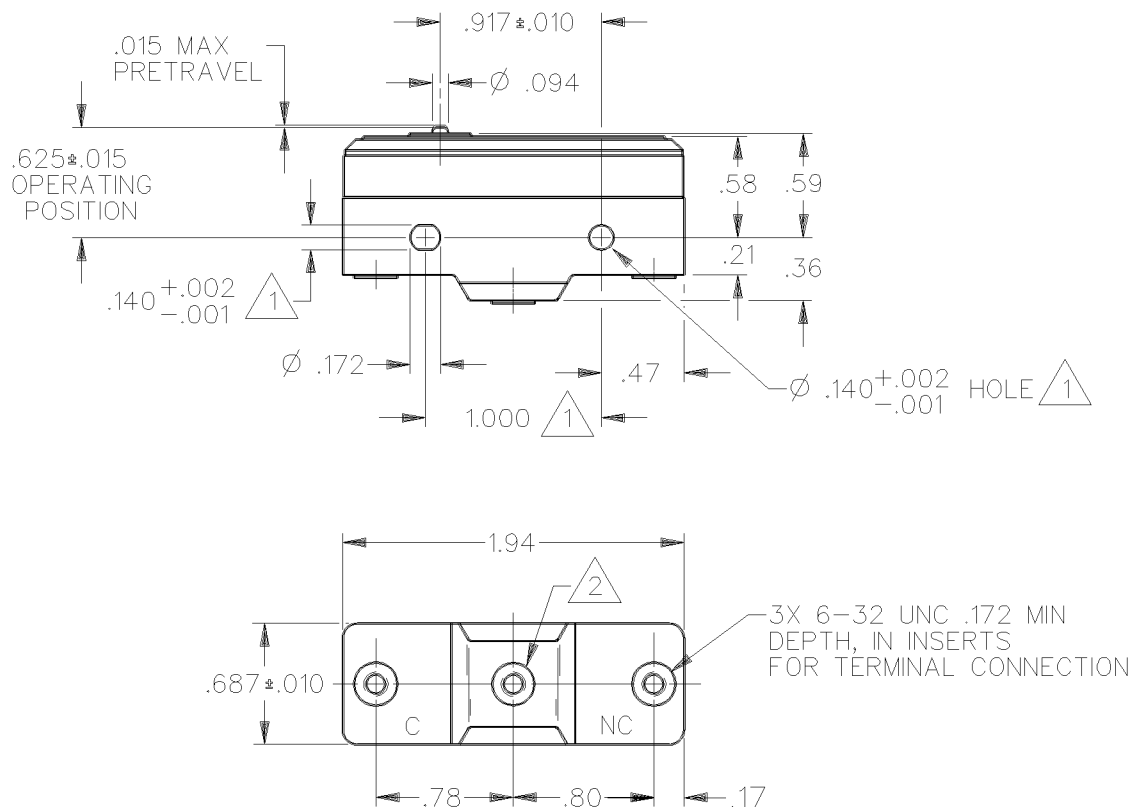


- NOTE
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .139$ MAX ON $1.000 \pm .002$ CENTERS
- 2 THREADED INSERT (NORMALLY OPEN) PROVIDED FOR EXTERNAL SCREW CONNECTION. THIS INSERT IS NOT ELECTRICALLY LIVE
- 3 - TERMINAL SCREWS FURNISHED UNASSEMBLED

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 7-10 OZ (198-294 GRAMS)	CONTACT ARRANGEMENT S P N C	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — 4 OZ MIN (113 GRAMS)			
DIFFERENTIAL TRAVEL — — .0005-.0010 (.0127-.0254 mm)	25A 12VDC	ONE PLACE (.0) ±.030	
OVERTRAVEL — — — .005 MIN (.13 mm MIN)		TWO PLACE (.00) ±.015	
		THREE PLACE (.000) ±.005	
		ANGLES ±	
		WEIGHT .060 LB	

DDM/CAD

DRAWN

G R T 19 FEB 92 CHECK