

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91829

SWITCH - BASIC

CATALOG LISTING

WZ-2R-A2**ASM1000****WZ-2R-A2**
PAGE 1 OF 1**M**DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A CO17410

G C H
12 APRIL 63B CO-
73287-JJ A L
22 NOV 93C CO-
77591DAW
22 JUN 94D CO
79125S A D
30 NOV 94

E CO93346

DLT
20 SEP 98

F 0017585

LKM
20 FEB 06

CHECK

19 APR 63

CHECK

L.S.D

CHECK

63

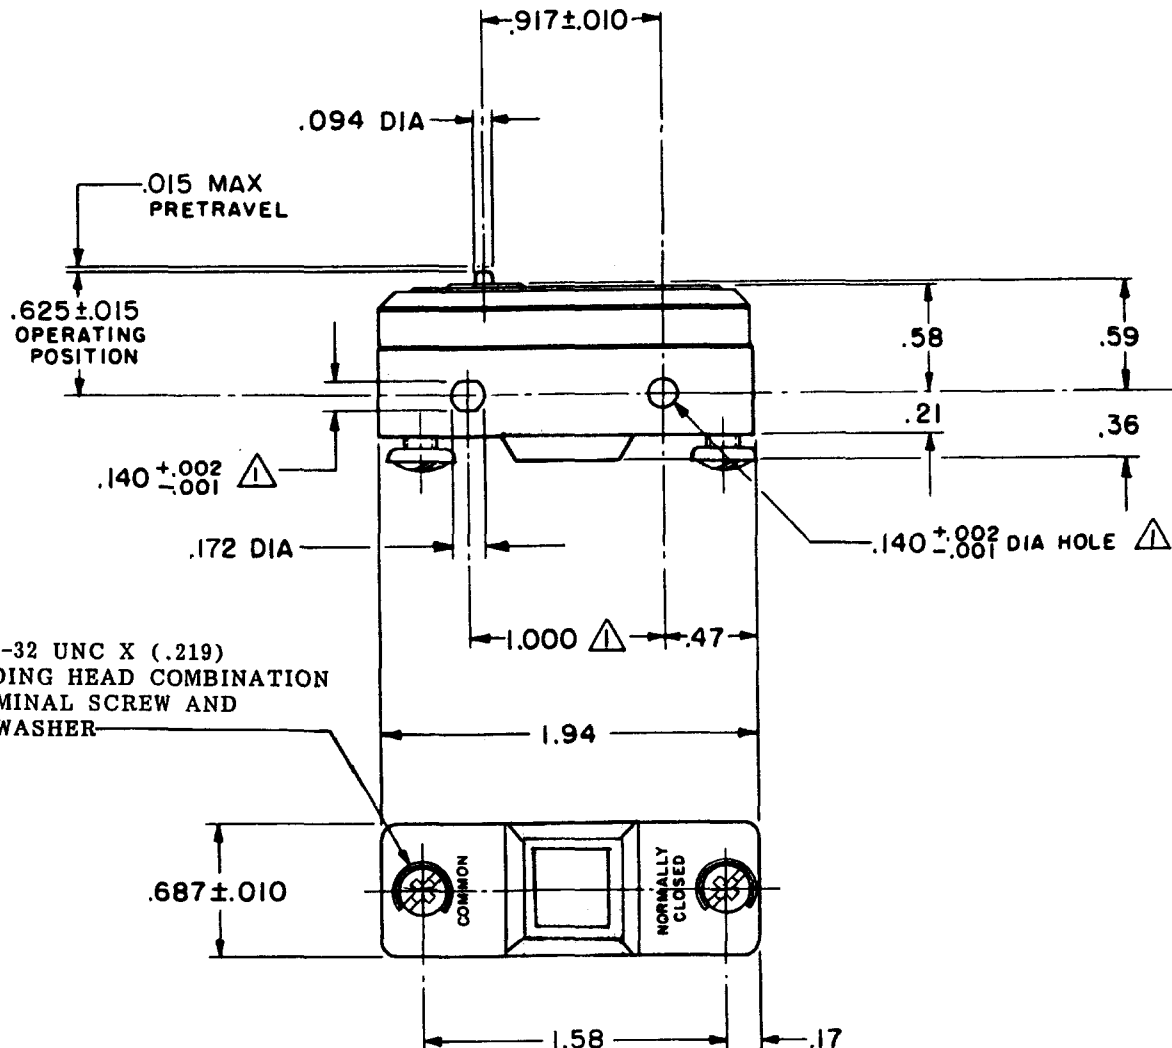
G C H

12 APRIL 63

FORMTEK

FO-80376

DRAWN

2X 6-32 UNC X (.219)
BINDING HEAD COMBINATION
TERMINAL SCREW AND
CUPWASHER

NOTE

MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-----9 - 13 OZ	CONTACT ARRANGEMENT S P N C	DO NOT SCALE PRINT
RELEASE FORCE-----4 OZ MIN		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL-----.0004 -.0020	-L96- 15 A-125, 250, OR 480 VAC 1/2 A-125 VDC; 1/4 A-250 VDC 1/8 HP-125 VAC; 1/4 HP-250 VAC	TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
OVERTRAVEL-----.005 MIN	-L288- -L315- -L306- CE SP 05 16A 250V ~ T85 5E4	WEIGHT .063 LB