

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

WZ-2RQ15-A2

WZ-2RQ15-A2
PAGE 1 OF 1

M

DRAWING
NUMBER

5

ISSUE

REPLACES

RELEASE NO. PR-11643

CHECK

REVISIONS

A	CO-73287-B	D H D	19 MAY 93
B	CO-77591	DAW	22 JUN 94
C	CO-79125	SAD	30 NOV 94
D	CO93346	DLT	17 AUG 98

CHECK

NOV 82


CHECK

NOV 82

FORMTEK

FO-52848-A


DRAWN

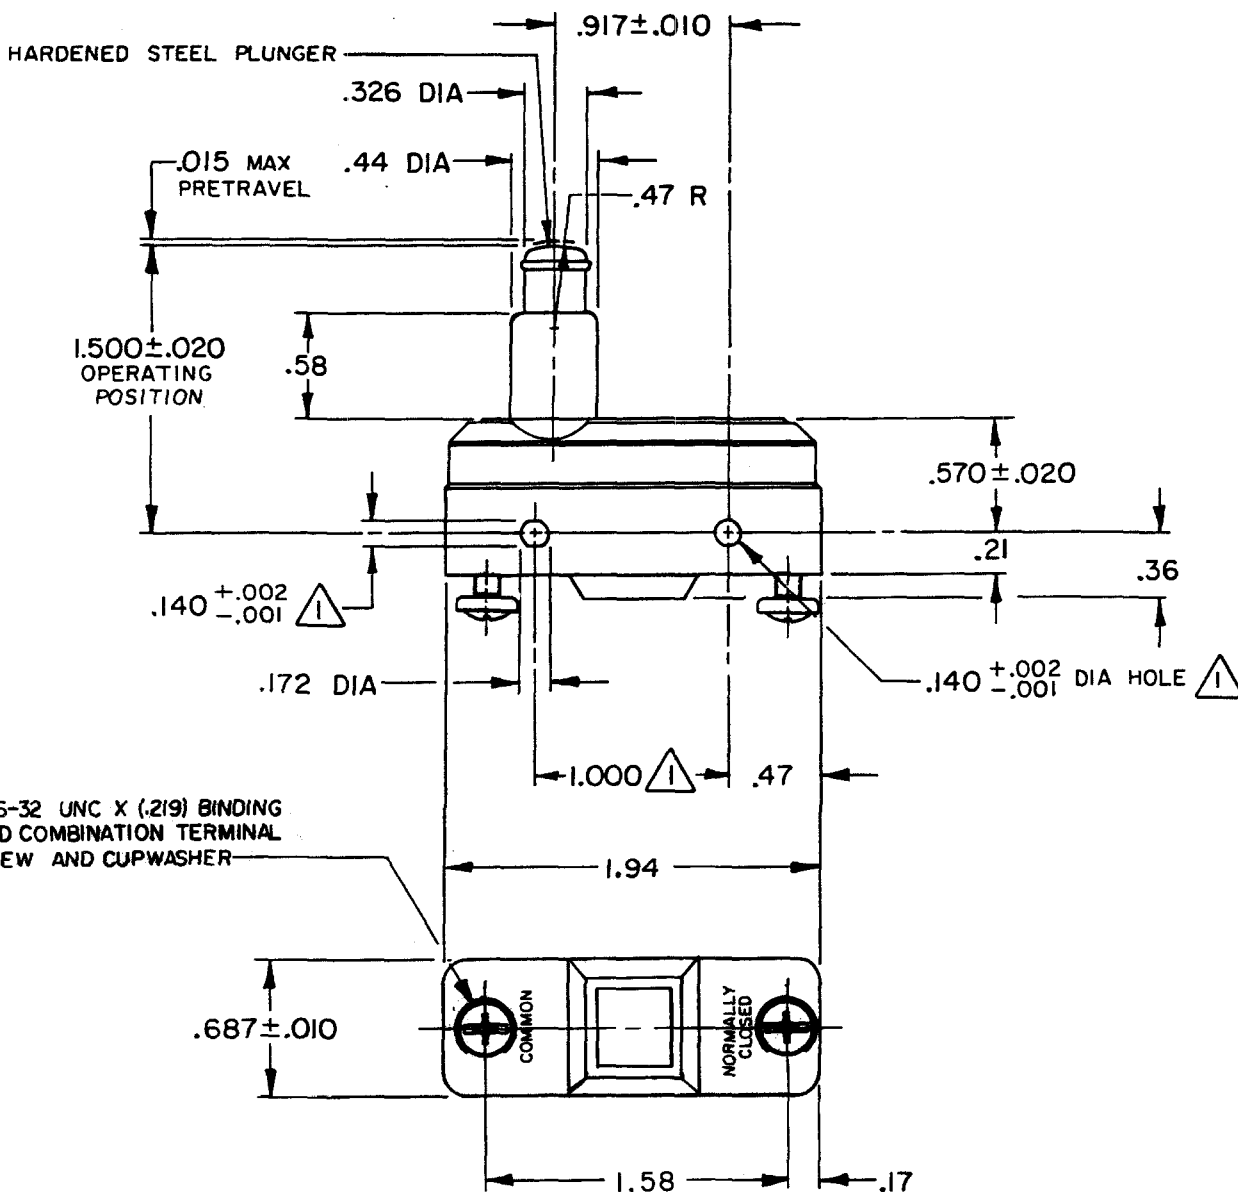

NOTE
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 9-13 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL---.0004 - .0020
OVERTRAVEL-----.219 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

-L9-
10A-125, 250, OR 480 VAC
1/2A - 125 VDC; 1/4A - 250 VDC

-L288-



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	
ONE PLACE	X.X	0.4/.016	X.X
TWO PLACES	X.XX	0.15/.006	X.XX
THREE PLACES	X.XXX		X.XXX
ANGLES			

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT .086 LB