


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
WZ-2RQ18T

ATM8500

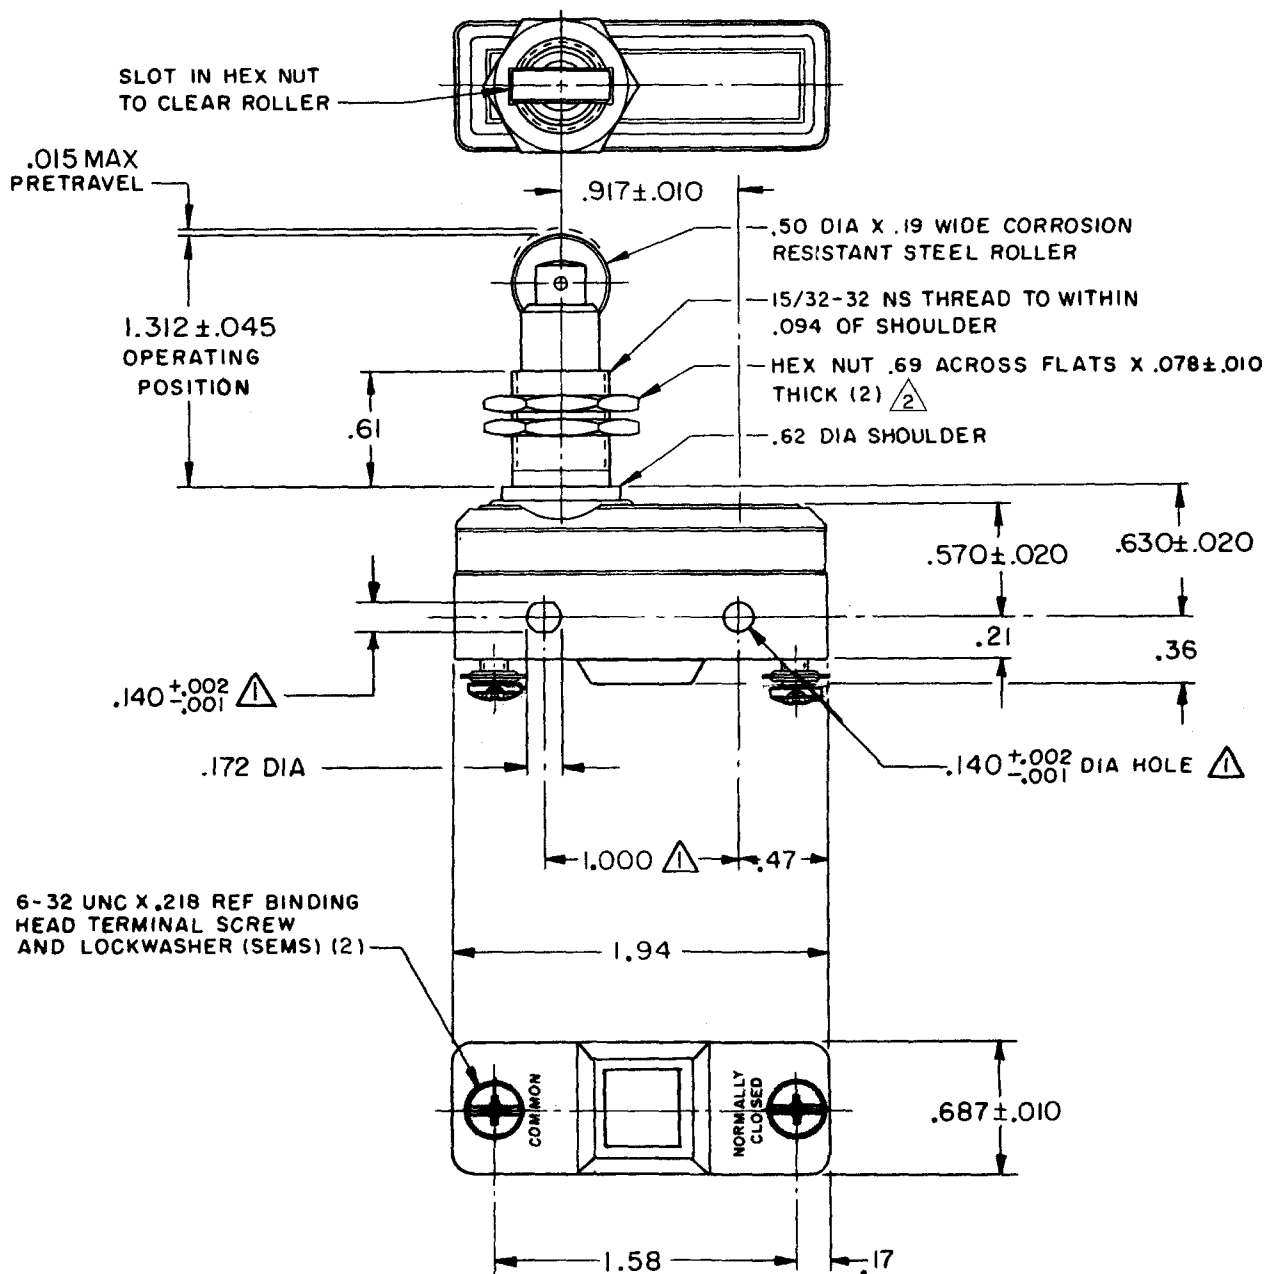


NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE----- 9-13 OZ
RELEASE FORCE----- 4 OZ MIN
DIFFERENTIAL TRAVEL-- .0004-.0020
OVERTRAVEL----- .141 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

CODE L 96 15A-125, 250, 480VAC
1/8 HP-125VAC; 1/4 HP-250VAC
1/2A-125VDC; 1/4A-250VDC
L288
L315
L306
CE  16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	
ONE PLACE	X,X	0.4/016	X,X 0.8/03
TWO PLACES	X,XX	0.15/006	X,XX 0.38/015
THREE PLACES	X,XXX		X,XXX 0.13/005
ANGLES			

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT .107 LB

WZ-2RQ18T

PAGE 1 OF 1

M

DRAWING
NUMBER

7

ISSUE

REVISIONS

A	CO-69351-D	JWB	18 JUL 91
B	CO-77591	DAW	22 JUN 94
C	CO-79125	SAD	30 NOV 94
D	CO-82133	CSL	1 AUG 96
E	CO-93346	DLT	21 SEP 98
F	0017585	LKM	20 FEB 06

FORMTEK

FO-52848-A

DRAWN

REPLACES

RELEASE NO. PR-5348

CHECK

CHECK

15

75

16

NOV

75

CHECK

30

NOV

75

CHECK

14

NOV

75

CHECK

14

NOV